

STOVE PRICE LIST



FEBRUARY 2026

STOVE PRICE LIST

FEBRUARY 2026

INDEX

HYBRID STOVES Infinity Plus Line

E228 A	6
E228 C	7
E228 C-H	9
E228 D-S	11
E228 H	12
E228 M	13
E228 M-H	15
E228 K	17
E228 S	18
E228 STEEL	19

PELLET STOVES Prestige Line

P943 Hermetic	24
P943 M Hermetic	25

PELLET STOVES Premium Plus Line

P220 C	28
P220 C TOP	29
P220 C with base	30
P220 C TOP with base	31
P220 M	32
P220 M TOP	33
P220 M STEEL	34
P220 M TOP STEEL	35
P220 T	36
P220 T TOP	37
P220 T STEEL	38
P220 T TOP STEEL	39
P220 T Frontal Glass	40
P220 T TOP Frontal Glass	41
P220 T STEEL Frontal Glass	42
P220 T TOP STEEL Frontal Glass	43
P222	44
P230 C	45
P230 C TOP	46
P230 C with base	47
P230 C TOP with base	48
P230 M	49
P230 M TOP	50
P230 M STEEL	51
P230 M TOP STEEL	52
P230 T	53
P230 T TOP	54
P230 T STEEL	55
P230 T TOP STEEL	56
P230 T Frontal Glass	57
P230 T TOP Frontal Glass	58
P230 T STEEL Frontal Glass	59
P230 T TOP STEEL Frontal Glass	60
P240	61
P241	62

PELLET STOVES Premium Line

P910 T Frontal Glass	64
P910 T TOP Frontal Glass	65
P910 T STEEL Frontal Glass	66
P910 T TOP STEEL Frontal Glass	67
P920 C	68
P920 C TOP	69
P920 K	70
P920 K TOP	71

P920 M	72
P920 M TOP	73
P920 M STEEL	74
P920 M TOP STEEL	75
P920 T	76
P920 T TOP	77
P920 T STEEL	78
P920 T TOP STEEL	79
P921 R	80
P921 T Frontal Glass	81
P921 T TOP Frontal Glass	82
P921 T STEEL Frontal Glass	83
P921 T TOP STEEL Frontal Glass	84
P925 Frontal Glass	85
P930 C	86
P930 C TOP	87
P930 K	88
P930 K TOP	89
P930 M	90
P930 M TOP	91
P930 M STEEL	92
P930 M TOP STEEL	93
P930 T	94
P930 T TOP	95
P930 T STEEL	96
P930 T TOP STEEL	97
P931 R	98
LINE	99
P934	100
P939	101
P945 C	102
P945 TOP STEEL	103

PELLET STOVES Trend Plus Line

P112 T	106
P112 T TOP	107
P122 T	108
P122 T TOP	109

PELLET STOVES Trend Line

P110 T	112
P120 5 STELLE	113
P120	114
P120 M	115
P120 T 5 STELLE	116
P120 T	117
P121 T	118
P130 5 STELLE	119
P130	120
P130 T 5 STELLE	121
P130 T	122
P136	123
P136 Hermetic	124
P137	125

PELLET STUBOTTO

BERNA pellet	132
BRUNICO	133
CANAZEI	134
ORTISEI	135
STUBOTTO C	136

INDEX

WOOD-BURNING STOVES

CIRCLE Hermetic	140
CIRCLE Hermetic BCS	142
ROUND Hermetic	144
ROUND Hermetic BCS	145
ROUND-H Hermetic	146
ROUND-H Hermetic BCS	147
ROUND-M Hermetic	148
ROUND-M Hermetic BCS	149
E520	150
E520 STEEL	151
E520 C	152
E520 T STEEL	153
E530	154
E530 STEEL	155
E530 C	156
E530 T STEEL	157
E900 M with oven	158
E924 Hermetic	159
E924 Hermetic BCS	161
E924 A Hermetic	163
E924 A Hermetic BCS	165
E924 A-H Hermetic	167
E924 A-H Hermetic BCS	169
E924 H Hermetic	171
E924 H Hermetic BCS	173
E924 M Hermetic	175
E924 M Hermetic BCS	177
E928	179
E928 Hermetic BCS	180
E928 A	181
E928 A Hermetic BCS	182
E928 C	183
E928 C Hermetic BCS	184
E928 C-H	185
E928 C-H Hermetic BCS	186
E928 C-M	187
E928 C-M Hermetic BCS	188
E928 D with oven	189
E928 H	190
E928 H Hermetic BCS	191
E928 M	192
E928 M Hermetic BCS	193
E928 R	194
E928 R with oven	195
E928 STEEL	196
E928 STEEL with oven	197
E928 S with food warmer	198
E928 S Hermetic BCS with food warmer	199
E929 C Hermetic	200
E929 C Hermetic BCS	201
E929 C-H Hermetic	202
E929 C-H Hermetic BCS	203
E929 D Hermetic	204
E929 D Hermetic BCS	205
E929 D-H Hermetic	206
E929 D-H Hermetic BCS	207
E929 M Hermetic	208
E929 M Hermetic BCS	209
E929 M-H Hermetic	210
E929 M-H Hermetic BCS	211
E929 T Hermetic	212
E929 T Hermetic BCS	213
E940 C-F with oven	214

E940 F with oven	215
E940 F STEEL with oven	216

WOOD-BURNING STOVES Trend Line

E124 Hermetic	218
E124 Hermetic BCS	219
E124 A Hermetic	220
E124 A Hermetic BCS	221
E128	222
E128 Hermetic BCS	223
E128 A	224
E128 A Hermetic BCS	225
E129 M Hermetic	226
E129 M Hermetic BCS	227

STUBOTTO - WOOD-BURNING

BRUNICO	234
BRUNICO BCS	235
CANAZEI	236
CANAZEI BCS	237
ORTISEI	238
ORTISEI BCS	239
STUBOTTO C	240

STOVE-FIREPLACES

BERNA wood	246
DAVOS wood	247
LUGANO wood	248

GAS STOVES

G958	252
G958 C	254
G958 D	256
G958 M	258
G963	260
G963 C	262
G963 D	264
G963 M	266

Piazzetta informs	270
-------------------	-----

General sales terms and conditions	271
------------------------------------	-----

Infinity Plus LINE

HYBRID STOVES Infinity Plus Line

E228 A	6
E228 C	7
E228 C-H	9
E228 D-S	11
E228 H	12
E228 M	13
E228 M-H	15
E228 K	17
E228 S	18
E228 STEEL	19

Accessories	20
-------------	-------	----

HYBRID STOVES Infinity Plus LINE

E228 A



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

	E228 A	
	PELLET	Wood-burning
• Model	SH140-P-09A	SH140-W-09A
• Type	135 - 230	
• Room heating capacity (min - max)	m³ 3,9 - 8,0	8,0
• Nominal heat output (min - max)	kW 85 - 87	86
• Thermal efficiency (min - max)	% 0,92 - 1,86	2,24
• Nominal consumption (min - max)	kg/h 15	-
• Hopper capacity	mm 350 - 380	
• Size of wood pieces	mm 317 x 338	
• Firebox opening W x H	kg 295	
• Stove weight	mg/Nm³ 20	6
• PMnom (13% O₂)	mg/Nm³ 5	35
• OGCnom (13% O₂)		

Rear flue outlet

	E228 A	
	PELLET	Wood-burning
• Model	SH140-P-10A	SH140-W-10A
• Type	140 - 235	
• Room heating capacity (min - max)	m³ 4,1 - 8,2	8,2
• Nominal heat output (min - max)	kW 90 - 88	88
• Thermal efficiency (min - max)	% 0,92 - 1,90	2,24
• Nominal consumption (min - max)	kg/h 15	-
• Hopper capacity	mm 350 - 380	
• Size of wood pieces	mm 317 x 338	
• Firebox opening W x H	kg 295	
• Stove weight	mg/Nm³ 20	5
• PMnom (13% O₂)	mg/Nm³ 5	35
• OGCnom (13% O₂)		




CODE EURO

VERSION		- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.120,00	
Cladding	BIANCO	P06105300C	2.040,00
	NERO OPACO	P06105160C	2.040,00
	TERRA COTTA	P06105090C	2.040,00
TOTAL STOVE		8.210,00	
Cladding	BIANCO GRIGIO	P06105410C	2.130,00
	ROSSO LAVA	P06105450C	2.130,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C	6.080,00

Accessories on request

Multifuoco System® single	P08020860C	515,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

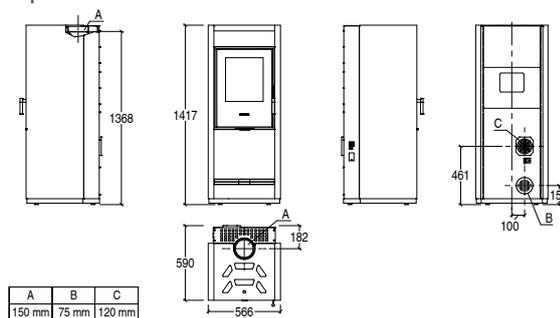

Dimensions in mm.


CODE EURO

VERSION		- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.120,00	
Cladding	BIANCO	P06105300C	2.040,00
	NERO OPACO	P06105160C	2.040,00
	TERRA COTTA	P06105090C	2.040,00
TOTAL STOVE		8.210,00	
Cladding	BIANCO GRIGIO	P06105410C	2.130,00
	ROSSO LAVA	P06105450C	2.130,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C	6.080,00

Accessories on request

Multifuoco System® single	P08020860C	515,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

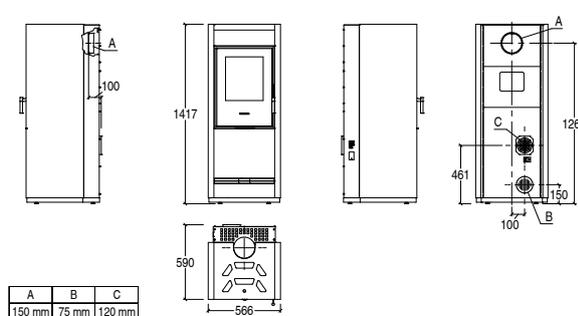

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 C without front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluke® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

		E228 C	
		SH140-P-09A PELLET	SH140-W-09A Wood-burning
• Model			
• Type			
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	288	
• PMnom (13% O2)	mg/Nm³	20	6
• OGCnom (13% O2)	mg/Nm³	5	35

Rear flue outlet

		E228 C	
		SH140-P-10A PELLET	SH140-W-10A Wood-burning
• Model			
• Type			
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	288	
• PMnom (13% O2)	mg/Nm³	20	5
• OGCnom (13% O2)	mg/Nm³	5	35



CODE EURO

VERSION	- WITHOUT FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.580,00

Cladding		
	BIANCO	P06110300C 2.500,00
	CANAPÀ	P06110350C 2.500,00
	NERO OPACO	P06110160C 2.500,00
	VERDE MIRTO	P06110250C 2.500,00

TOTAL STOVE	8.665,00	
-------------	-----------------	--


Cladding		
	BIANCO GRIGIO	P06110410C 2.585,00
	ROSSO LAVA	P06110450C 2.585,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C 6.080,00
-------	--	---------------------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

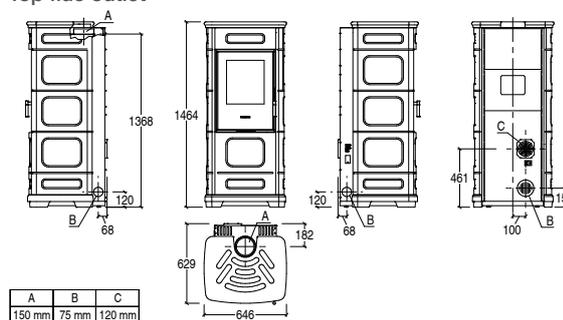

Dimensions in mm.

CODE EURO

VERSION	- WITHOUT FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.580,00

Cladding		
	BIANCO	P06110300C 2.500,00
	CANAPÀ	P06110350C 2.500,00
	NERO OPACO	P06110160C 2.500,00
	VERDE MIRTO	P06110250C 2.500,00

TOTAL STOVE	8.665,00	
-------------	-----------------	--


Cladding		
	BIANCO GRIGIO	P06110410C 2.585,00
	ROSSO LAVA	P06110450C 2.585,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C 6.080,00
-------	---	---------------------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

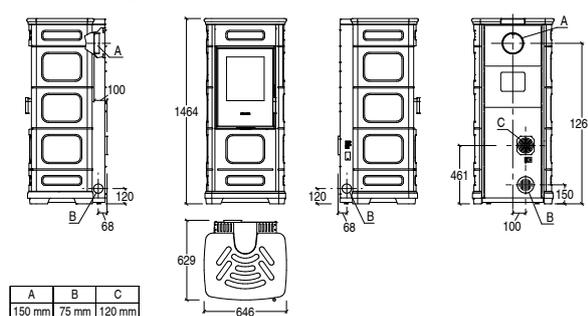

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 C with front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

		E228 C	
		PELLET SH140-P-09A	Wood-burning SH140-W-09A
• Model		E228 C	
• Type		SH140-P-09A SH140-W-09A	
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	288	
• PMnom (13% O2)	mg/Nm³	20	6
• OGCnom (13% O2)	mg/Nm³	5	35

Rear flue outlet

		E228 C	
		PELLET SH140-P-10A	Wood-burning SH140-W-10A
• Model		E228 C	
• Type		SH140-P-10A SH140-W-10A	
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	288	
• PMnom (13% O2)	mg/Nm³	20	5
• OGCnom (13% O2)	mg/Nm³	5	35



CODE EURO

VERSION	- WITH FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.580,00

Cladding			
	BIANCO	P06127300C	2.500,00
	CANAPÀ	P06127350C	2.500,00
	NERO OPACO	P06127160C	2.500,00
	VERDE MIRTO	P06127250C	2.500,00

TOTAL STOVE	8.665,00	
-------------	-----------------	--


Cladding			
	BIANCO GRIGIO	P06127410C	2.585,00
	ROSSO LAVA	P06127450C	2.585,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C	6.080,00
-------	--	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

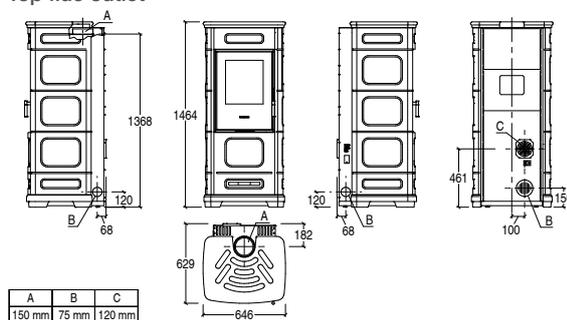

Dimensions in mm.

CODE EURO

VERSION	- WITH FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.580,00

Cladding			
	BIANCO	P06127300C	2.500,00
	CANAPÀ	P06127350C	2.500,00
	NERO OPACO	P06127160C	2.500,00
	VERDE MIRTO	P06127250C	2.500,00

TOTAL STOVE	8.665,00	
-------------	-----------------	--


Cladding			
	BIANCO GRIGIO	P06127410C	2.585,00
	ROSSO LAVA	P06127450C	2.585,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C	6.080,00
-------	---	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

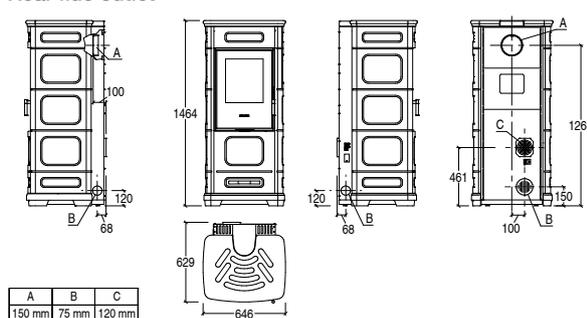

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 C-H without front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: optional HSS heat storage system / Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- HSS accumulation: optional
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

		PELLET	Wood-burning
• Model		E228 C-H	
• Type		SH140-P-09A	SH140-W-09A
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	320	
• Stove weight incl. HSS	kg	543	
• PMnom (13% O ₂)	mg/Nm ³	20	6
• OGCnom (13% O ₂)	mg/Nm ³	5	35


Rear flue outlet

		PELLET	Wood-burning
• Model		E228 C-H	
• Type		SH140-P-10A	SH140-W-10A
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	320	
• Stove weight incl. HSS	kg	543	
• PMnom (13% O ₂)	mg/Nm ³	20	5
• OGCnom (13% O ₂)	mg/Nm ³	5	35



VERSION	- WITHOUT FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		9.470,00
Cladding	BIANCO	P06103300C 3.390,00
	CANAPA	P06103350C 3.390,00
	NERO OPACO	P06103160C 3.390,00
	VERDE MIRTO	P06103250C 3.390,00
TOTAL STOVE		9.560,00
Cladding	BIANCO GRIGIO	P06103410C 3.480,00
	ROSSO LAVA	P06103450C 3.480,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C 6.080,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)


Top flue outlet

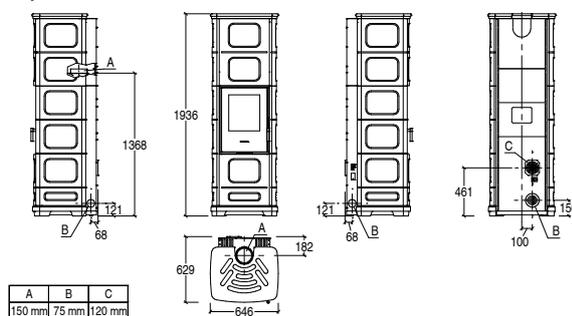

Dimensions in mm.

VERSION	- WITHOUT FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		9.470,00
Cladding	BIANCO	P06103300C 3.390,00
	CANAPA	P06103350C 3.390,00
	NERO OPACO	P06103160C 3.390,00
	VERDE MIRTO	P06103250C 3.390,00
TOTAL STOVE		9.560,00
Cladding	BIANCO GRIGIO	P06103410C 3.480,00
	ROSSO LAVA	P06103450C 3.480,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C 6.080,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

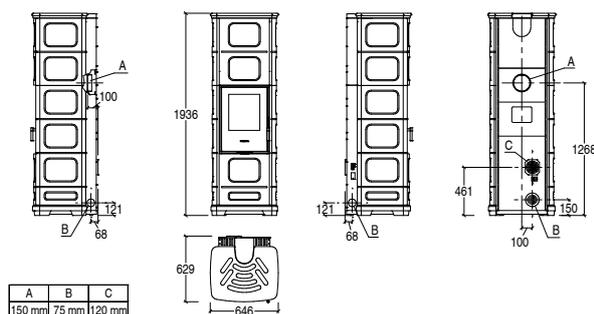

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 C-H with front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: optional HSS heat storage system / Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: AluKer® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- HSS accumulation: optional
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

		PELLET	Wood-burning
• Model		E228 C-H	
• Type		SH140-P-09A	SH140-W-09A
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	320	
• Stove weight incl. HSS	kg	543	
• PMnom (13% O₂)	mg/Nm³	20	6
• OGCnom (13% O₂)	mg/Nm³	5	35

Rear flue outlet

		PELLET	Wood-burning
• Model		E228 C-H	
• Type		SH140-P-10A	SH140-W-10A
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	320	
• Stove weight incl. HSS	kg	543	
• PMnom (13% O₂)	mg/Nm³	20	5
• OGCnom (13% O₂)	mg/Nm³	5	35



VERSION	- WITH FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			9.470,00

Cladding	BIANCO	P06129300C	3.390,00
	CANAPA	P06129350C	3.390,00
	NERO OPACO	P06129160C	3.390,00
	VERDE MIRTO	P06129250C	3.390,00

TOTAL STOVE		CODE	EURO
TOTAL STOVE			9.560,00


Cladding	BIANCO GRIGIO	P06129410C	3.480,00
	ROSSO LAVA	P06129450C	3.480,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C	6.080,00
-------	--	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

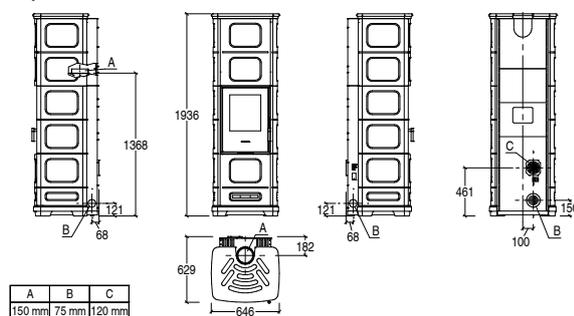

Dimensions in mm.

VERSION	- WITH FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			9.470,00

Cladding	BIANCO	P06129300C	3.390,00
	CANAPA	P06129350C	3.390,00
	NERO OPACO	P06129160C	3.390,00
	VERDE MIRTO	P06129250C	3.390,00

TOTAL STOVE		CODE	EURO
TOTAL STOVE			9.560,00


Cladding	BIANCO GRIGIO	P06129410C	3.480,00
	ROSSO LAVA	P06129450C	3.480,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C	6.080,00
-------	---	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

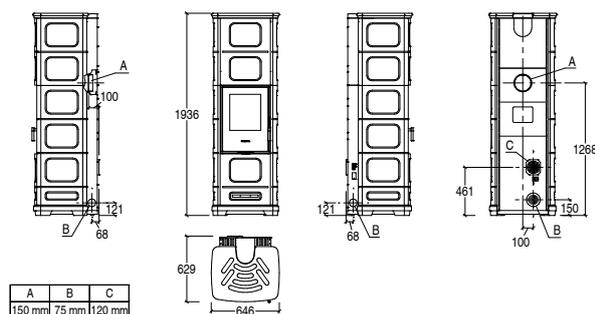

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 D-S



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: no
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

	E228 D-S	
	PELLET	Wood-burning
• Model	SH140-P-13A	SH140-W-13A
• Type	135	230
• Room heating capacity (min - max)	m³	
• Nominal heat output (min - max)	kW	3,9 - 8,0
• Thermal efficiency (min - max)	%	85 - 87
• Nominal consumption (min - max)	kg/h	0,92 - 1,86
• Hopper capacity	kg	40
• Size of wood pieces	mm	350 - 380
• Firebox opening W x H	mm	317 x 338
• Stove weight	kg	306
• PMnom (13% O2)	mg/Nm³	20
• OGCnom (13% O2)	mg/Nm³	5

Rear flue outlet

	E228 D-S	
	PELLET	Wood-burning
• Model	SH140-P-14A	SH140-W-14A
• Type	140	235
• Room heating capacity (min - max)	m³	
• Nominal heat output (min - max)	kW	4,1 - 8,2
• Thermal efficiency (min - max)	%	90 - 88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90
• Hopper capacity	kg	40
• Size of wood pieces	mm	350 - 380
• Firebox opening W x H	mm	317 x 338
• Stove weight	kg	306
• PMnom (13% O2)	mg/Nm³	20
• OGCnom (13% O2)	mg/Nm³	5



CODE EURO


VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		7.985,00
Cladding	BIANCO CALCE	P06239940C 260,00
	BIANCO CALCE - NERO OPACO (*)	P06239941C 260,00
	NERO OPACO	P06239160C 260,00
	VERDE MIRTO - NERO OPACO (*)	P06239251C 260,00
TOTAL STOVE		8.065,00
Cladding	MARRONE TENNÉ - NERO OPACO (*)	P062393B1C 340,00
	ROSSO LAVA - NERO OPACO (*)	P06239451C 340,00
Stove	STUFA E228 DS SCARICO SUPERIORE	P07228400C 7.725,00
Accessories on request		
Multifuoco System® single	P08027890C	515,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

(*) Bi-colour version with side panels NERO OPACO.

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		7.985,00
Cladding	BIANCO CALCE	P06239940C 260,00
	BIANCO CALCE - NERO OPACO (*)	P06239941C 260,00
	NERO OPACO	P06239160C 260,00
	VERDE MIRTO - NERO OPACO (*)	P06239251C 260,00
TOTAL STOVE		8.065,00
Cladding	MARRONE TENNÉ - NERO OPACO (*)	P062393B1C 340,00
	ROSSO LAVA - NERO OPACO (*)	P06239451C 340,00
Stove	STUFA E228 DS SCARICO POSTERIORE	P07228410C 7.725,00
Accessories on request		
Multifuoco System® single	P08027890C	515,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

(*) Bi-colour version with side panels NERO OPACO.

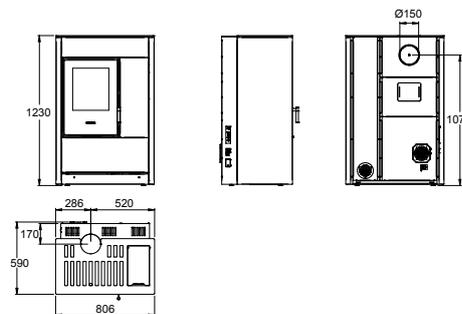

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 H



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica - steel / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- HSS accumulation: optional
- Heat storage system with heat exchanger: optional (installable only if fitted together with the Multifuoco System®)
- Ash vacuum cleaner: standard
- Installation: wall - flush
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Version with top flue outlet

		PELLET		Wood-burning
		SH140-P-05	E228 H	SH140-W-05
• Room heating capacity (min - max)	m³	135 - 230	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0	
• Thermal efficiency (min - max)	%	85,1 - 87,0	85,7	
• Nominal consumption (min - max)	kg/h	0,9 - 1,8	2,1	
• Hopper capacity	kg	45	-	
• Size of wood pieces	mm	350 - 380		
• Firebox opening W x H	mm	317 x 338		
• Stove weight	kg	445		
• Stove weight incl. HSS	kg	522		
• Stove weight with heat storage system	kg	492		
• with heat exchanger				
• PMnom (13% O2)	mg/Nm³	20	14	
• OGCnom (13% O2)	mg/Nm³	3	58	

Version with rear flue outlet

		PELLET		Wood-burning
		SH140-P-06	E228 H	SH140-W-06
• Room heating capacity (min - max)	m³	140 - 235	135 - 230	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2	
• Thermal efficiency (min - max)	%	90,3 - 88,0	89,2	
• Nominal consumption (min - max)	kg/h	0,9 - 1,9	2,2	
• Hopper capacity	kg	45	-	
• Size of wood pieces	mm	350 - 380		
• Firebox opening W x H	mm	317 x 338		
• Stove weight	kg	445		
• Stove weight incl. HSS	kg	522		
• Stove weight with heat storage system	kg	492		
• with heat exchanger				
• PMnom (13% O2)	mg/Nm³	19	11	
• OGCnom (13% O2)	mg/Nm³	2	68	




CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		11.920,00
Cladding	BIANCO ANTICO	P06235640C 4.085,00
	BIANCO ANTICO - NERO OPACO	P06235161C 4.085,00
	NERO OPACO	P06235160C 4.085,00
	TERRA COTTA	P06235090C 4.085,00
TOTAL STOVE		12.030,00
Cladding	MARRONE TENNÉ	P062353B0C 4.195,00
	ROSSO LAVA	P06235450C 4.195,00
Stove	STUFA E228 H SCARICO SUPERIORE	P07228300C 7.835,00

Accessories on request

Multifuoco System® single	P08027610C	775,00
Heat Storage System (HSS) kit	P08062920C	675,00
Heat storage system with heat exchanger (installable only if fitted together with the Multifuoco System®)	P08062930C	1.000,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Version with top flue outlet

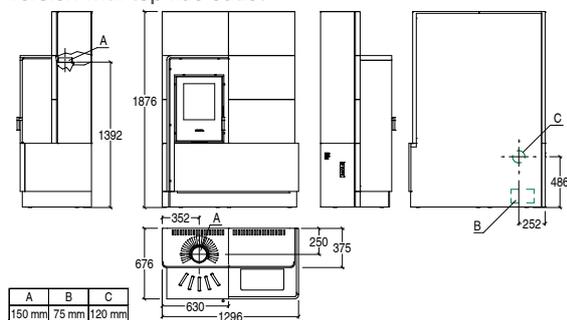

Dimensions in mm.


CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		11.920,00
Cladding	BIANCO ANTICO	P06235640C 4.085,00
	BIANCO ANTICO - NERO OPACO	P06235161C 4.085,00
	NERO OPACO	P06235160C 4.085,00
	TERRA COTTA	P06235090C 4.085,00
TOTAL STOVE		12.030,00
Cladding	MARRONE TENNÉ	P062353B0C 4.195,00
	ROSSO LAVA	P06235450C 4.195,00
Stove	STUFA E228 H SCARICO POSTERIORE	P07228310C 7.835,00

Accessories on request

Multifuoco System® single	P08027610C	775,00
Heat Storage System (HSS) kit	P08062920C	675,00
Heat storage system with heat exchanger (installable only if fitted together with the Multifuoco System®)	P08062930C	1.000,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Version with rear flue outlet

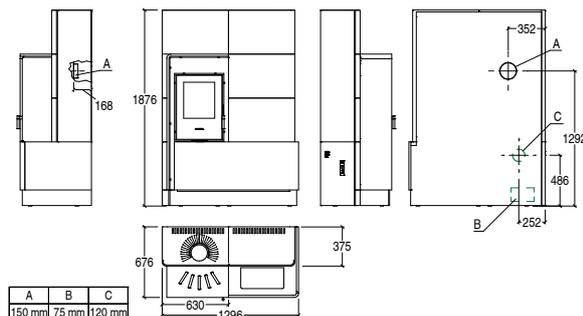

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 M without front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

	PELLET		Wood-burning
	SH140-P-09A	SH140-W-09A	
• Model	E228 M		
• Type	SH140-P-09A SH140-W-09A		
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	315	
• PMnom (13% O2)	mg/Nm³	20	6
• OGCnom (13% O2)	mg/Nm³	5	35

Rear flue outlet


	PELLET		Wood-burning
	SH140-P-10A	SH140-W-10A	
• Model	E228 M		
• Type	SH140-P-10A SH140-W-10A		
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	315	
• PMnom (13% O2)	mg/Nm³	20	5
• OGCnom (13% O2)	mg/Nm³	5	35



CODE EURO

VERSION	- WITHOUT FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.125,00
Cladding	BIANCO CALCE	P06107940C 2.045,00
	NERO OPACO	P06107160C 2.045,00
	TERRA COTTA	P06107090C 2.045,00
TOTAL STOVE		8.210,00
Cladding	BIANCO GRIGIO	P06107410C 2.130,00
	ROSSO LAVA	P06107450C 2.130,00
	MARRONE TENNÉ	P061073B0C 2.130,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C 6.080,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

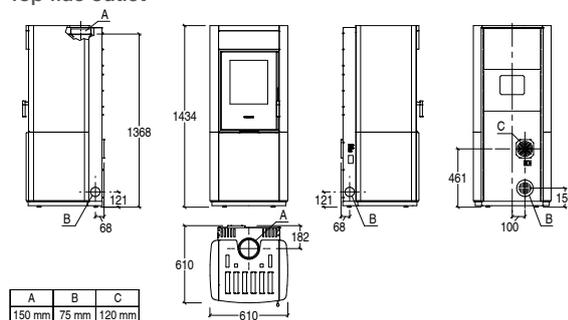


Dimensions in mm.

CODE EURO

VERSION	- WITHOUT FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.125,00
Cladding	BIANCO CALCE	P06107940C 2.045,00
	NERO OPACO	P06107160C 2.045,00
	TERRA COTTA	P06107090C 2.045,00
TOTAL STOVE		8.210,00
Cladding	BIANCO GRIGIO	P06107410C 2.130,00
	ROSSO LAVA	P06107450C 2.130,00
	MARRONE TENNÉ	P061073B0C 2.130,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C 6.080,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

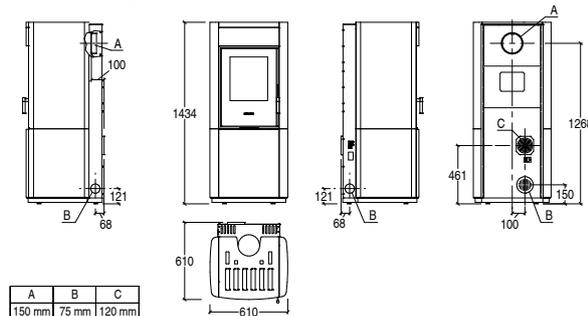

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 M with front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

		E228 M	
		PELLET SH140-P-09A	Wood-burning SH140-W-09A
• Model		E228 M	
• Type		SH140-P-09A SH140-W-09A	
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	315	
• PMnom (13% O2)	mg/Nm³	20	6
• OGCnom (13% O2)	mg/Nm³	5	35

Rear flue outlet

		E228 M	
		PELLET SH140-P-10A	Wood-burning SH140-W-10A
• Model		E228 M	
• Type		SH140-P-10A SH140-W-10A	
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	315	
• PMnom (13% O2)	mg/Nm³	20	5
• OGCnom (13% O2)	mg/Nm³	5	35



CODE EURO

VERSION	- WITH FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.125,00

Cladding	BIANCO CALCE	P06157940C	2.045,00
	NERO OPACO	P06157160C	2.045,00
	TERRA COTTA	P06157090C	2.045,00

TOTAL STOVE		8.210,00
-------------	--	-----------------


Cladding	BIANCO GRIGIO	P06157410C	2.130,00
	ROSSO LAVA	P06157450C	2.130,00
	MARRONE TENNÉ	P061573B0C	2.130,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C	6.080,00
-------	--	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

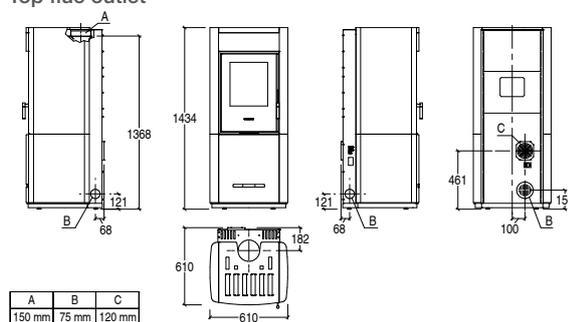

Dimensions in mm.

CODE EURO

VERSION	- WITH FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		8.125,00

Cladding	BIANCO CALCE	P06157940C	2.045,00
	NERO OPACO	P06157160C	2.045,00
	TERRA COTTA	P06157090C	2.045,00

TOTAL STOVE		8.210,00
-------------	--	-----------------


Cladding	BIANCO GRIGIO	P06157410C	2.130,00
	ROSSO LAVA	P06157450C	2.130,00
	MARRONE TENNÉ	P061573B0C	2.130,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C	6.080,00
-------	---	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

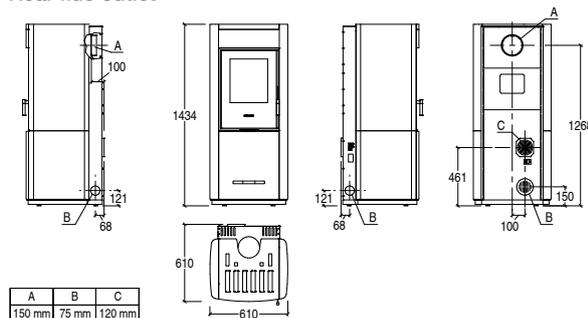

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 M-H without front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: optional HSS heat storage system / Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- HSS accumulation: optional
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

	PELLET	Wood-burning
• Model	E228 M-H	
• Type	SH140-P-09A	SH140-W-09A
• Room heating capacity (min - max)	135 - 230	
• Nominal heat output (min - max)	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	85 - 87	86
• Nominal consumption (min - max)	0,92 - 1,86	2,24
• Hopper capacity	15	-
• Size of wood pieces	350 - 380	
• Firebox opening W x H	317 x 338	
• Stove weight	325	
• Stove weight incl. HSS	548	
• PMnom (13% O ₂)	20	6
• OGCnom (13% O ₂)	5	35


Rear flue outlet

	PELLET	Wood-burning
• Model	E228 M-H	
• Type	SH140-P-10A	SH140-W-10A
• Room heating capacity (min - max)	140 - 235	
• Nominal heat output (min - max)	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	90 - 88	88
• Nominal consumption (min - max)	0,92 - 1,90	2,24
• Hopper capacity	15	-
• Size of wood pieces	350 - 380	
• Firebox opening W x H	317 x 338	
• Stove weight	325	
• Stove weight incl. HSS	548	
• PMnom (13% O ₂)	20	5
• OGCnom (13% O ₂)	5	35



VERSION	- WITHOUT FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	9.315,00	
Cladding	BIANCO CALCE	P06104940C 3.235,00
	NERO OPACO	P06104160C 3.235,00
	TERRA COTTA	P06104090C 3.235,00
TOTAL STOVE	9.405,00	
Cladding	BIANCO GRIGIO	P06104410C 3.325,00
	ROSSO LAVA	P06104450C 3.325,00
	MARRONE TENNÉ	P061043B0C 3.325,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C 6.080,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)


Top flue outlet

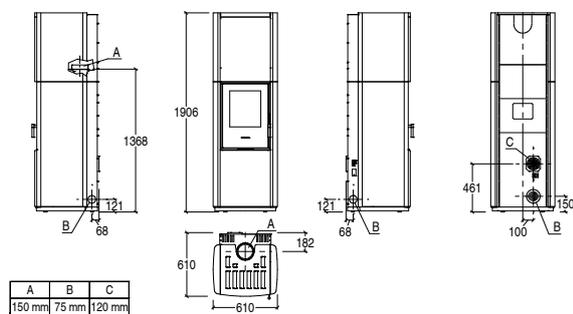

Dimensions in mm.

VERSION	- WITHOUT FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	9.315,00	
Cladding	BIANCO CALCE	P06104940C 3.235,00
	NERO OPACO	P06104160C 3.235,00
	TERRA COTTA	P06104090C 3.235,00
TOTAL STOVE	9.405,00	
Cladding	BIANCO GRIGIO	P06104410C 3.325,00
	ROSSO LAVA	P06104450C 3.325,00
	MARRONE TENNÉ	P061043B0C 3.325,00
Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C 6.080,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

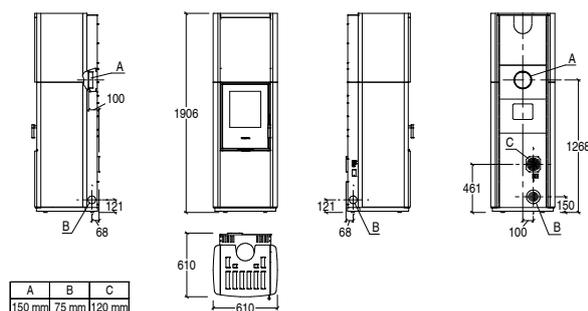

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 M-H with front air vent



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: optional HSS heat storage system / Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Alukey® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- HSS accumulation: optional
- Ash vacuum cleaner: standard
- Installation: wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

		PELLET	Wood-burning
• Model		E228 M-H	
• Type		SH140-P-09A	SH140-W-09A
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	325	
• Stove weight incl. HSS	kg	548	
• PMnom (13% O ₂)	mg/Nm³	20	6
• OGCnom (13% O ₂)	mg/Nm³	5	35

Rear flue outlet

		PELLET	Wood-burning
• Model		E228 M-H	
• Type		SH140-P-10A	SH140-W-10A
• Room heating capacity (min - max)	m³	140 - 235	
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	325	
• Stove weight incl. HSS	kg	548	
• PMnom (13% O ₂)	mg/Nm³	20	5
• OGCnom (13% O ₂)	mg/Nm³	5	35



CODE EURO

VERSION	- WITH FRONT AIR VENT - TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	9.315,00	

Cladding	BIANCO CALCE	P06158940C	3.235,00
	NERO OPACO	P06158160C	3.235,00
	TERRA COTTA	P06158090C	3.235,00

TOTAL STOVE	9.405,00	
-------------	-----------------	--


Cladding	BIANCO GRIGIO	P06158410C	3.325,00
	ROSSO LAVA	P06158450C	3.325,00
	MARRONE TENNÉ	P061583B0C	3.325,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO SUPERIORE	P07228005C	6.080,00
-------	--	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

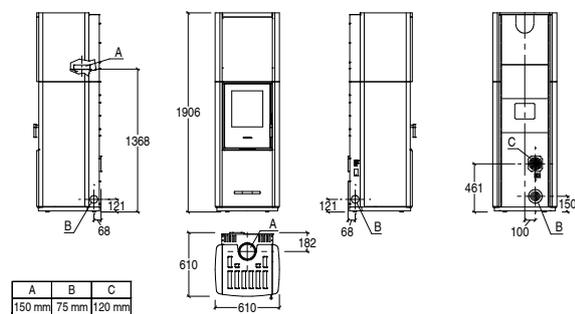

Dimensions in mm.

CODE EURO

VERSION	- WITH FRONT AIR VENT - REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	9.315,00	

Cladding	BIANCO CALCE	P06158940C	3.235,00
	NERO OPACO	P06158160C	3.235,00
	TERRA COTTA	P06158090C	3.235,00

TOTAL STOVE	9.405,00	
-------------	-----------------	--


Cladding	BIANCO GRIGIO	P06158410C	3.325,00
	ROSSO LAVA	P06158450C	3.325,00
	MARRONE TENNÉ	P061583B0C	3.325,00

Stove	STUFA E228 A-M-C-CH-MH SCARICO POSTERIORE	P07228015C	6.080,00
-------	---	------------	----------

Accessories on request

Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Heat Storage System (HSS) kit	P08062100C	1.265,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

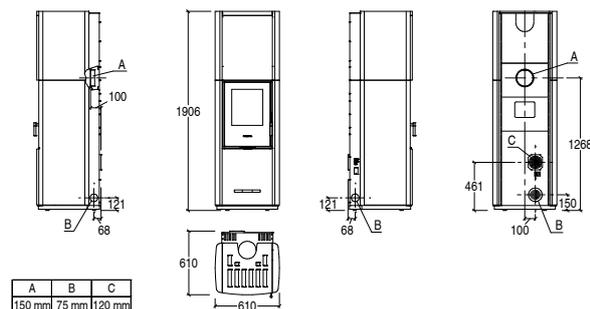

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 K



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: AluKer® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional (only on top flue version)
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- HSS accumulation: optional
- Heat storage system with heat exchanger: optional (installable only if fitted together with the Multifuoco System®)
- Ash vacuum cleaner: standard
- Installation: wall - flush
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Version with top flue outlet

		E228 K	
		SH140-P-05	SH140-W-05
• Room heating capacity (min - max)	m³	135 - 230	
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85,1 - 87,0	85,7
• Nominal consumption (min - max)	kg/h	0,9 - 1,8	2,1
• Hopper capacity	kg	40	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	406	
• Stove weight incl. HSS	kg	494	
• Stove weight with heat storage system	kg	453	
• with heat exchanger			
• PMnom (13% O₂)	mg/Nm³	20	14
• OGCnom (13% O₂)	mg/Nm³	3	58

Version with rear flue outlet

		E228 K	
		SH140-P-06	SH140-W-06
• Room heating capacity (min - max)	m³	140 - 235	135 - 230
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90,3 - 88,0	89,2
• Nominal consumption (min - max)	kg/h	0,9 - 1,9	2,2
• Hopper capacity	kg	40	-
• Size of wood pieces	mm	350 - 380	
• Firebox opening W x H	mm	317 x 338	
• Stove weight	kg	406	
• Stove weight incl. HSS	kg	494	
• Stove weight with heat storage system	kg	453	
• with heat exchanger			
• PMnom (13% O₂)	mg/Nm³	19	11
• OGCnom (13% O₂)	mg/Nm³	2	68




CODE EURO

VERSION		- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		12.770,00	
Cladding	BIANCO	P06234300C	4.770,00
	CANAPA	P06234350C	4.770,00
	NERO OPACO	P06234160C	4.770,00
	VERDE MIRTO	P06234250C	4.770,00
TOTAL STOVE		12.880,00	
Cladding	BIANCO GRIGIO	P06234410C	4.880,00
	ROSSO LAVA	P06234450C	4.880,00
Stove	STUFA E228 K SCARICO SUPERIORE	P07228200C	8.000,00

Accessories on request

Multifuoco System® single	P08027610C	775,00
Heat Storage System (HSS) kit	P08062900C	675,00
Heat storage system with heat exchanger (installable only if fitted together with the Multifuoco System®)	P08062910C	1.000,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Version with top flue outlet

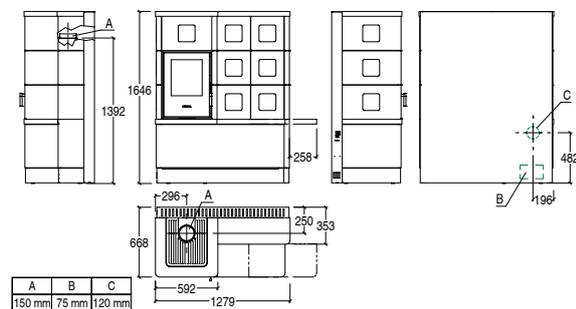

Dimensions in mm.


CODE EURO

VERSION		- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		12.770,00	
Cladding	BIANCO	P06234300C	4.770,00
	CANAPA	P06234350C	4.770,00
	NERO OPACO	P06234160C	4.770,00
	VERDE MIRTO	P06234250C	4.770,00
TOTAL STOVE		12.880,00	
Cladding	BIANCO GRIGIO	P06234410C	4.880,00
	ROSSO LAVA	P06234450C	4.880,00
Stove	STUFA E228 K SCARICO POSTERIORE	P07228210C	8.000,00

Accessories on request

Multifuoco System® single	P08027610C	775,00
Heat Storage System (HSS) kit	P08062900C	675,00
Heat storage system with heat exchanger (installable only if fitted together with the Multifuoco System®)	P08062910C	1.000,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Version with rear flue outlet

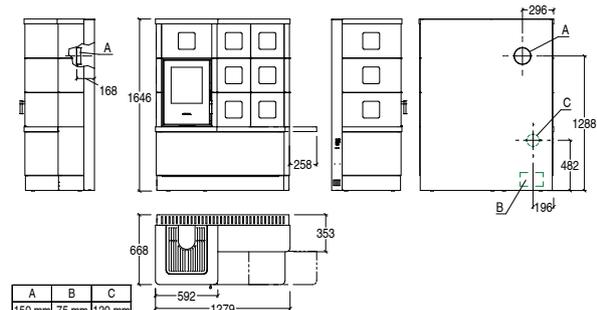

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 S



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: no
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

	E228 S	
	PELLET	Wood-burning
• Model	SH140-P-13A	SH140-W-13A
• Type	135	230
• Room heating capacity (min - max)	m³	
• Nominal heat output (min - max)	kW	3,9 - 8,0
• Thermal efficiency (min - max)	%	85 - 87
• Nominal consumption (min - max)	kg/h	0,92 - 1,86
• Hopper capacity	kg	40
• Size of wood pieces	mm	350 - 380
• Firebox opening W x H	mm	317 x 338
• Stove weight	kg	306
• PMnom (13% O2)	mg/Nm³	20
• OGCnom (13% O2)	mg/Nm³	5

Rear flue outlet

	E228 S	
	PELLET	Wood-burning
• Model	SH140-P-14A	SH140-W-14A
• Type	140	235
• Room heating capacity (min - max)	m³	
• Nominal heat output (min - max)	kW	4,1 - 8,2
• Thermal efficiency (min - max)	%	90 - 88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90
• Hopper capacity	kg	40
• Size of wood pieces	mm	350 - 380
• Firebox opening W x H	mm	317 x 338
• Stove weight	kg	306
• PMnom (13% O2)	mg/Nm³	20
• OGCnom (13% O2)	mg/Nm³	5




CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		
Cladding	BIANCO	P19228510C
	COR-TEN	P19228520C
	NERO	P19228530C
Stove	STUFA E228 S SCARICO SUPERIORE	P07228500C
Accessories on request		
Multifuoco System® single	P08027920C	515,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		
Cladding	BIANCO	P19228510C
	COR-TEN	P19228520C
	NERO	P19228530C
Stove	STUFA E228 S SCARICO POSTERIORE	P07228510C
Accessories on request		
Multifuoco System® single	P08027920C	515,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

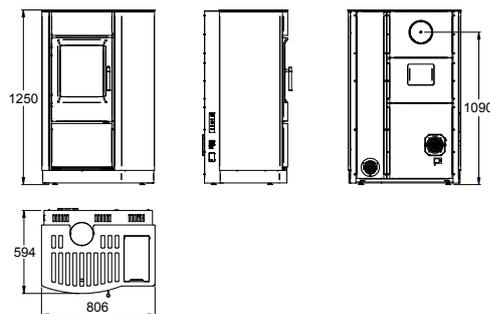

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

E228 STEEL



GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: AluKer® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

TECHNICAL DATA

Top flue outlet

	PELLET		Wood-burning
	SH140-P-09A	SH140-W-09A	E228 ST
• Model	E228 ST		
• Type	SH140-P-09A SH140-W-09A		
• Room heating capacity (min - max)	m³	135 - 230	135 - 230
• Nominal heat output (min - max)	kW	3,9 - 8,0	8,0
• Thermal efficiency (min - max)	%	85 - 87	86
• Nominal consumption (min - max)	kg/h	0,92 - 1,86	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	-
• Firebox opening W x H	mm	317 x 338	-
• Stove weight	kg	245	-
• PMnom (13% O2)	mg/Nm³	20	6
• OGCnom (13% O2)	mg/Nm³	5	35

Rear flue outlet


	PELLET		Wood-burning
	SH140-P-10A	SH140-W-10A	E228 ST
• Model	E228 ST		
• Type	SH140-P-10A SH140-W-10A		
• Room heating capacity (min - max)	m³	140 - 235	140 - 235
• Nominal heat output (min - max)	kW	4,1 - 8,2	8,2
• Thermal efficiency (min - max)	%	90 - 88	88
• Nominal consumption (min - max)	kg/h	0,92 - 1,90	2,24
• Hopper capacity	kg	15	-
• Size of wood pieces	mm	350 - 380	-
• Firebox opening W x H	mm	317 x 338	-
• Stove weight	kg	245	-
• PMnom (13% O2)	mg/Nm³	20	5
• OGCnom (13% O2)	mg/Nm³	5	35



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL PRICE	6.900,00	
Firebox with cladding	BIANCO with Nero front panels	P07228915C 6.900,00
	NERO with Nero front panels	P07228925C 6.900,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Top flue outlet

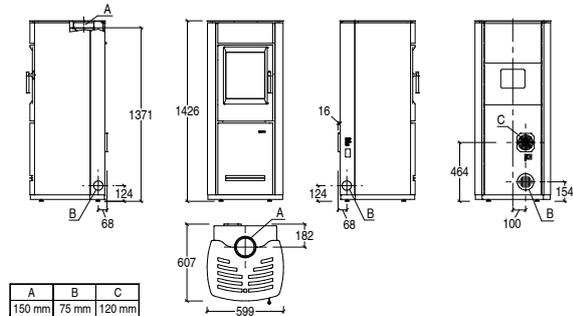


Dimensions in mm.

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL PRICE	6.900,00	
Firebox with cladding	BIANCO with Nero front panels	P07228916C 6.900,00
	NERO with Nero front panels	P07228926C 6.900,00
Accessories on request		
Multifuoco System® single	P08020860C	515,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

Rear flue outlet

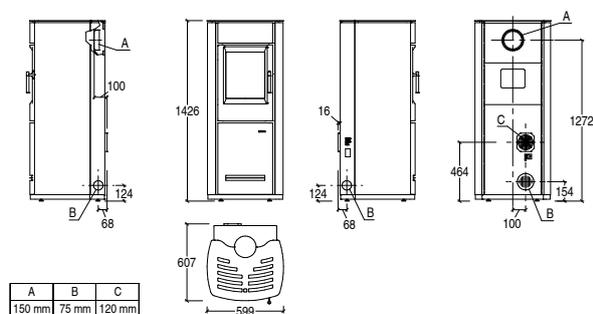

Dimensions in mm.

HYBRID STOVES Infinity Plus LINE

Accessories

MULTIFUOCO SYSTEM®

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System®	E228 A, E228 C E228 C-H E228 M, E228 M-H E228 STEEL	P08020860C	515,00
	E228 D-S	P08027890C	515,00
	E228 S	P08027920C	515,00
	E228 H, E228 K	P08027610C	775,00

HSS HEAT STORAGE SYSTEM

ITEM	WEIGHT	COMPATIBLE MODELS	CODE	EURO
 HSS kit Heat storage system with heat exchanger	223 kg	E228 C-H E228 M-H	P08062100C	1.265,00
	76 kg	E228 H	P08062920C	675,00
	78 kg	E228 K	P08062900C	675,00
	36 kg	E228 H	P08062930C	1.000,00
	29 kg	E228 K	P08062910C	1.000,00

ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 Y connector	Ø 7,5	10	N08011006	30,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00

[1] Available in 30 meter roll, minimum order quantity: 1 meter.

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Air vent with closure, enamelled white	L 25 x H 12 Ø 7,5	10	N08011001	60,00
 Wall air vent with closure, enamelled white	L 25 x H 11 Ø 7,5	6	N08011002	85,00
 Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
 Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
 Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
 Air vent without closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00
 Air vent with closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00

ACCESSORIES FOR COMBUSTION AIR

ITEM	COMPATIBLE MODELS	CODE	EURO
 Flexible aluminium pipe Ø 12 cm for combustion air	All models	P08010360	35,00 per pack (3 metres)
 Aeration grille with spring for wall hole Ø 12-15 cm	All models	N08010015	5,00

HYBRID STOVES Infinity Plus LINE

Accessories

AIR VENTS

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Fixed air vent RH, LH, rear, depending on the model</p>	E228 C, E228 C-H E228 M, E228 M-H E228 STEEL	P08062240C	35,00

EXTERNAL AIR INTAKE GRILLE

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>White painted adjustable external air intake grille 17,5 x 27,5 cm with manual control</p>	All models	N08010007	40,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
 <p>Rectangular steel floor plate</p>	All models	100x120	P08024300C	335,00
 <p>Round edged steel floor plate</p>	All models	100x120	P08024310C	335,00

PIPES - BENDS - CONNECTORS FOR HYBRID STOVES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
 <p>Pipe</p>	L 25	150	P08025020	52,00
	L 50	150	P08025050	72,00
	L 100	150	P08025080	112,00
 <p>Bend 90° (2x45°) with inspection</p>	L 32 x H 32	150	P08025200	99,00
 <p>Bend 45° with inspection</p>	L 25 x H 30	150	P08025230	92,00
 <p>Bend 45°</p>	L 17 x H 17	150	P08025260	72,00
 <p>Wall connector</p>	-	150	P08025290	16,00
 <p>Flue ring</p>	-	150	P08025320	40,00

Prestige LINE

PELLET STOVES Prestige Line

P943	Hermetic	24
P943 M	Hermetic	25

Accessories	126
-----------------------	-----

PELLET STOVES Prestige **LINE**

P943 Hermetic



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: steel / Aluker®
- Smoke baffle plate / Brazier: steel / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with nickel-plated finish
- Ash tray: yes
- Standard flue outlet position: rear centre
- LCD remote control: yes
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner

TECHNICAL DATA

		P943-S
• Model		SP232-01
• Type		185 - 315
• Room heating capacity (min - max)	m ³	4,1 - 11,0
• Nominal heat output (min - max)	kW	89,8 - 92,0
• Thermal efficiency (min - max)	%	0,9 - 2,4
• Nominal consumption (min - max)	kg/h	20
• Hopper capacity	kg	202
• Stove weight	kg	20
• PMnom (13% O ₂)	mg/Nm ³	20
• OGCnom (13% O ₂)	mg/Nm ³	1



		CODE	EURO
TOTAL PRICE			6.785,00
Cladding	BIANCO MERINGA	P06056820C	1.700,00
	BLU VERDEMARE	P06056110C	1.700,00
	BORDEAUX	P06056420C	1.700,00
	CANAPA	P06056350C	1.700,00
	TERRA ORIENTE	P06056550C	1.700,00
	VERDE MIRTO	P06056260C	1.700,00
Stove	P943 Ermetica	P07943101C	5.085,00
Accessories on request			
	Wi-Fi module for Piazzetta App	N08013012C	315,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

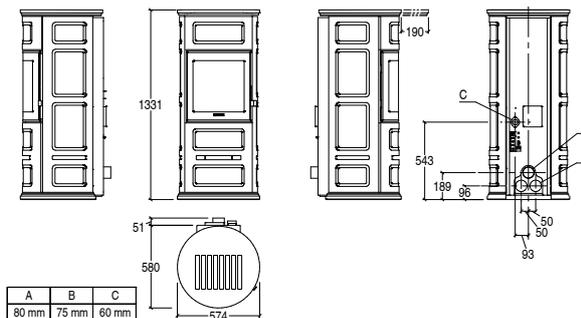

Dimensions in mm.

PELLET STOVES Prestige **LINE**


P943 M Hermetic



		CODE	EURO
TOTAL PRICE			6.600,00
Cladding	BIANCO	P06057300C	1.515,00
	GRIGIO CERATO	P06057310C	1.515,00
	KAKI	P06057990C	1.515,00
	NERO OPACO	P06057160C	1.515,00
	ROSSO LAVA	P06057450C	1.515,00
	TERRA COTTA	P06057090C	1.515,00
Stove	P943 Ermetica	P07943101C	5.085,00
Accessories on request			
	Wi-Fi module for Piazzetta App	N08013012C	315,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: steel / Aluker®
- Smoke baffle plate / Brazier: steel / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with nickel-plated finish
- Ash tray: yes
- Standard flue outlet position: rear centre
- LCD remote control: yes
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner

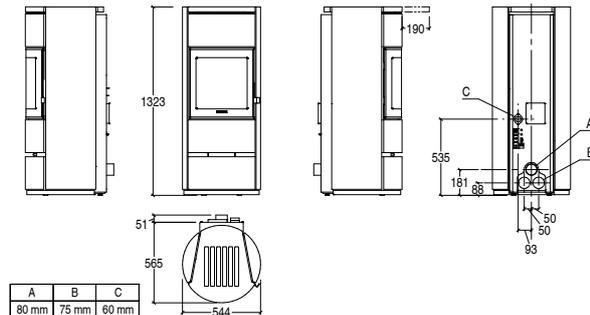

Dimensions in mm.

TECHNICAL DATA

• Model		P943-S M
• Type		SP232-01
• Room heating capacity (min - max)	m³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	89,8 - 92,0
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	20
• Stove weight	kg	202
• PMnom (13% O2)	mg/Nm³	20
• OGCnom (13% O2)	mg/Nm³	1



Premium Plus LINE

PELLET STOVES Premium Plus Line

P220 C	28
P220 C TOP	29
P220 C with base	30
P220 C TOP with base	31
P220 M	32
P220 M TOP	33
P220 M STEEL	34
P220 M TOP STEEL	35
P220 T	36
P220 T TOP	37
P220 T STEEL	38
P220 T TOP STEEL	39
P220 T Frontal Glass	40
P220 T TOP Frontal Glass	41
P220 T STEEL Frontal Glass	42
P220 T TOP STEEL Frontal Glass	43
P222	44
P230 C	45
P230 C TOP	46
P230 C with base	47
P230 C TOP with base	48
P230 M	49
P230 M TOP	50
P230 M STEEL	51
P230 M TOP STEEL	52
P230 T	53
P230 T TOP	54
P230 T STEEL	55
P230 T TOP STEEL	56
P230 T Frontal Glass	57
P230 T TOP Frontal Glass	58
P230 T STEEL Frontal Glass	59
P230 T TOP STEEL Frontal Glass	60
P240	61
P241	62

Accessories	126
-------------	-----

PELLET STOVES Premium Plus LINE

P220 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


• Model		
• Type		
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	140
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1

REAR flue outlet

P220 C
SP400-12A
145 - 245
3,3 - 8,5
91 - 91
0,76 - 1,95
19,5
140
10
1

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			4.960,00
Cladding	BIANCO	P06139300C	1.165,00
	CANAPA	P06139350C	1.165,00
	NERO OPACO	P06139160C	1.165,00
	VERDE MIRTO	P06139250C	1.165,00
TOTAL STOVE			5.055,00
Cladding	BIANCO GRIGIO	P06139410C	1.260,00
	ROSSO LAVA	P06139450C	1.260,00
Stove	P220 C REAR FLUE OUTLET	P07220500C	3.795,00
Accessories on request			
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08063150C	55,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

Rear flue outlet

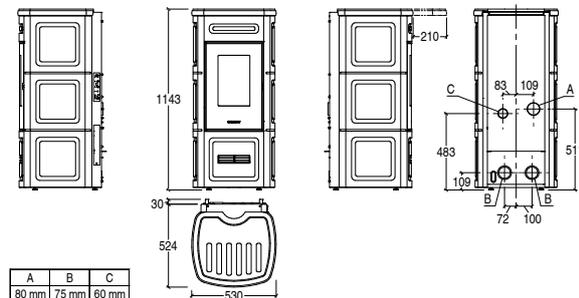

Dimensions in mm.



PELLET STOVES Premium Plus LINE

P220 C TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

TOP flue outlet

P220 C TOP	
SP400-01	
145 - 245	
3,4 - 8,5	
89,8 - 91,3	
0,7 - 1,9	
14	
143	
15	
3	



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
---------	---	--	--

TOTAL STOVE	5.155,00		
-------------	-----------------	--	--

Cladding	BIANCO	P06139300C	1.165,00
	CANAPA	P06139350C	1.165,00
	NERO OPACO	P06139160C	1.165,00
	VERDE MIRTO	P06139250C	1.165,00

TOTAL STOVE	5.250,00		
-------------	-----------------	--	--


Cladding	BIANCO GRIGIO	P06139410C	1.260,00
	ROSSO LAVA	P06139450C	1.260,00

Stove	P220 C TOP FLUE OUTLET	P07220010C	3.990,00
-------	------------------------	------------	----------

Accessories on request

Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062050C	360,00
Top-rear flue kit	P08062170C	120,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

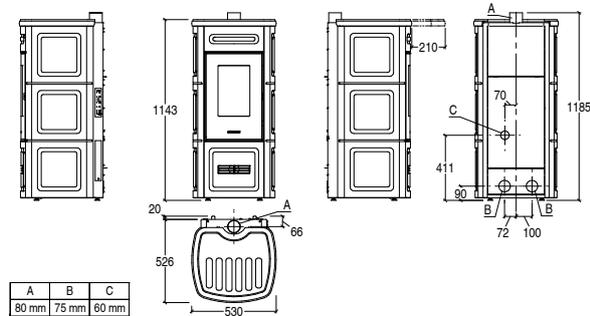

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 C with base



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


TECHNICAL DATA		REAR flue outlet
• Model		P220 C W/B
• Type		SP400-12A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	145
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.145,00
Cladding with stove base	BIANCO	P06128300C 1.350,00
	CANAPA	P06128350C 1.350,00
	NERO OPACO	P06128160C 1.350,00
	VERDE MIRTO	P06128250C 1.350,00
TOTAL STOVE		5.230,00
Cladding with stove base	BIANCO GRIGIO	P06128410C 1.435,00
	ROSSO LAVA	P06128450C 1.435,00
Stove	P220 C REAR FLUE OUTLET	P07220500C 3.795,00
Accessories on request		
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

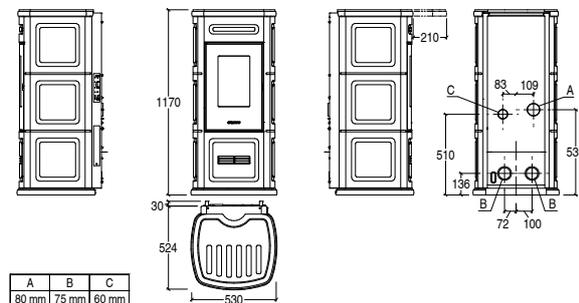

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 C TOP with base



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³


TOP flue outlet

P220 C W/B TOP

SP400-01
145 - 245
3,4 - 8,5
89,8 - 91,3
0,7 - 1,9
14
148
15
3

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			5.340,00
Cladding with stove base	BIANCO	P06128300C	1.350,00
	CANAPA	P06128350C	1.350,00
	NERO OPACO	P06128160C	1.350,00
	VERDE MIRTO	P06128250C	1.350,00
TOTAL STOVE			5.425,00
Cladding with stove base	BIANCO GRIGIO	P06128410C	1.435,00
	ROSSO LAVA	P06128450C	1.435,00
Stove	P220 C TOP FLUE OUTLET	P07220010C	3.990,00
Accessories on request			
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062050C	360,00
Top-rear flue kit		P08062170C	120,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

Top flue outlet

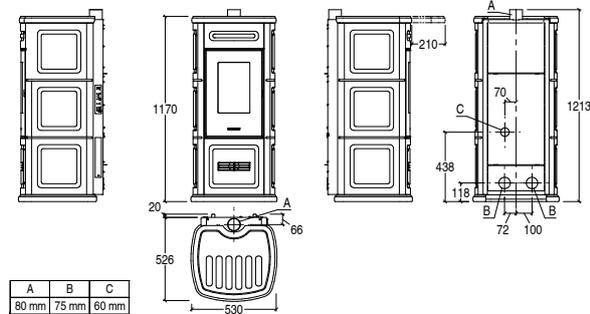

Dimensions in mm.



PELLET STOVES Premium Plus LINE

P220 M



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P220 M
• Type		SP400-12A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,95
• Hopper capacity	kg	18
• Stove weight	kg	150
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.950,00
Cladding	BIANCO CALCE	P06143940C 1.055,00
	NERO OPACO	P06143160C 1.055,00
	TERRA COTTA	P06143090C 1.055,00
TOTAL STOVE		5.050,00
Cladding	BIANCO GRIGIO	P06143410C 1.155,00
	MARRONE TENNÉ	P061433B0C 1.155,00
	ROSSO LAVA	P06143450C 1.155,00
Stove	P220 M REAR FLUE OUTLET	P07220700C 3.895,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

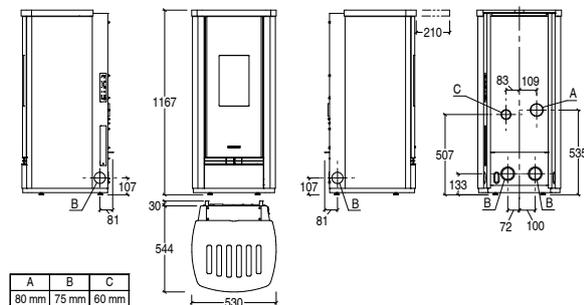

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 M STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

REAR flue outlet


P220 M STEEL	
Model	SP400-12A
Room heating capacity (min - max)	145 - 245
Nominal heat output (min - max)	3,3 - 8,5
Thermal efficiency (min - max)	91 - 91
Nominal consumption (min - max)	0,76 - 1,95
Hopper capacity	18
Stove weight	128
PMnom (13% O ₂)	10
OGCnom (13% O ₂)	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	4.630,00	
Cladding	BIANCO	P19220200C 735,00
	NERO	P19220210C 735,00
Stove	P220 M REAR FLUE OUTLET	P07220700C 3.895,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

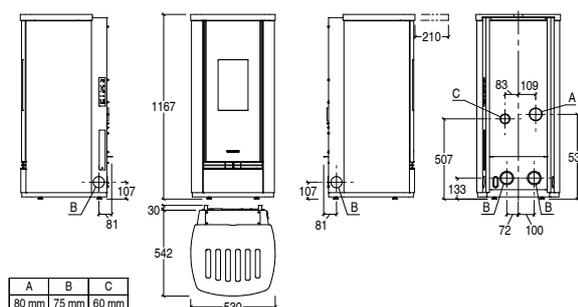

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 M TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet	
		P220 M TOP STEEL	
• Model		SP400-01	
• Type		145 - 245	
• Room heating capacity (min - max)	m ³	3,4 - 8,5	
• Nominal heat output (min - max)	kW	89,8 - 91,3	
• Thermal efficiency (min - max)	%	0,7 - 1,9	
• Nominal consumption (min - max)	kg/h	14	
• Hopper capacity	kg	155	
• Stove weight	kg	15	
• PMnom (13% O ₂)	mg/Nm ³	3	
• OGCnom (13% O ₂)	mg/Nm ³		



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.825,00
Cladding	BIANCO	P19220200C 735,00
	NERO	P19220210C 735,00
Stove	P220 M TOP FLUE OUTLET	P07220210C 4.090,00
Accessories on request		
Top-rear flue kit	P08062170C	120,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062050C	360,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 <small>per linear metre</small>

Top flue outlet

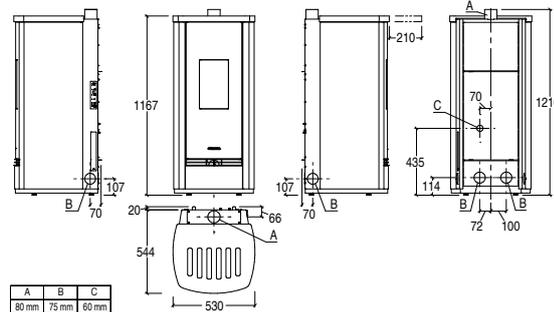

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P220 T
• Type		SP400-12A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	143
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.950,00
Cladding	BIANCO CALCE	P06149940C	1.055,00
	NERO OPACO	P06149160C	1.055,00
	TERRA COTTA	P06149090C	1.055,00
TOTAL STOVE			5.050,00
Cladding	BIANCO GRIGIO	P06149410C	1.155,00
	MARRONE TENNÉ	P061493B0C	1.155,00
	ROSSO LAVA	P06149450C	1.155,00
Stove	P220 T REAR FLUE OUTLET	P07220600C	3.895,00
Accessories on request			
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08063150C	55,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

Rear flue outlet

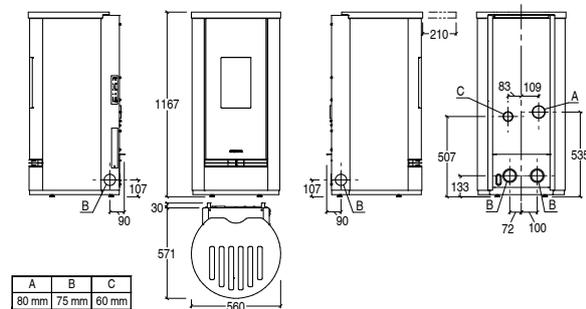

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 T TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

TOP flue outlet

Model	Room heating capacity (min - max) m ³	Nominal heat output (min - max) kW	Thermal efficiency (min - max) %	Nominal consumption (min - max) kg/h	Hopper capacity kg	Stove weight kg	PMnom (13% O ₂) mg/Nm ³	OGCnom (13% O ₂) mg/Nm ³
P220 T TOP	145 - 245	3,4 - 8,5	89,8 - 91,3	0,7 - 1,9	14	146	15	3

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		CODE	EURO
TOTAL STOVE				5.145,00
Cladding	BIANCO CALCE	P06149940C	1.055,00	
	NERO OPACO	P06149180C	1.055,00	
	TERRA COTTA	P06149090C	1.055,00	
TOTAL STOVE				5.245,00
Cladding	BIANCO GRIGIO	P06149410C	1.155,00	
	MARRONE TENNÉ	P061493B0C	1.155,00	
	ROSSO LAVA	P06149450C	1.155,00	
Stove	P220 T TOP FLUE OUTLET	P07220110C	4.090,00	
Accessories on request				
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00		
Rear union for wall ducting connection	N08019042C	35,00		
Pellet loading kit	P08062180C	55,00		
Top coaxial flue kit Ø 80/130	P08062050C	360,00		
Top-rear flue kit	P08062170C	120,00		
LCD remote control	P08062070C	125,00		
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00		
				<small>per linear metre</small>

Top flue outlet

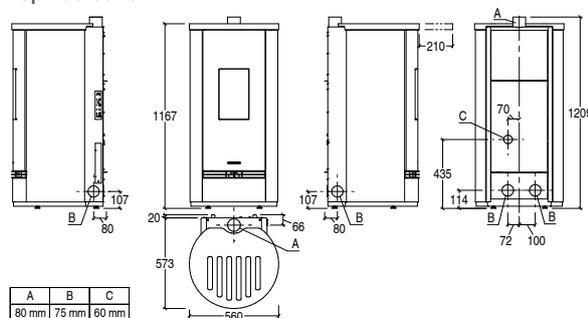

Dimensions in mm.



PELLET STOVES Premium Plus LINE

P220 T STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³


REAR flue outlet

P220 T STEEL
SP400-12A
145 - 245
3,3 - 8,5
91 - 91
0,76 - 1,95
19,5
143
10
1

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.630,00
Cladding	BIANCO	P19220100C 735,00
	NERO	P19220110C 735,00
Stove	P220 T REAR FLUE OUTLET	P07220600C 3.895,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

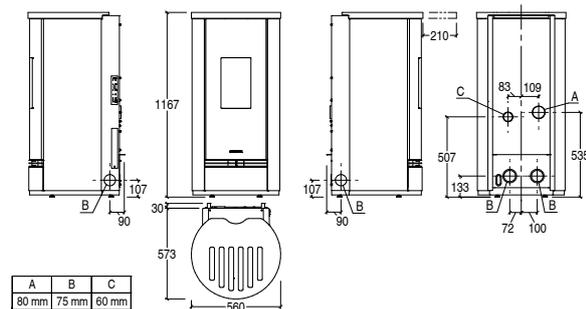

Dimensions in mm.



PELLET STOVES Premium Plus LINE

P220 T TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet	
		P220 T TOP STEEL	
• Model		SP400-01	
• Type		145 - 245	
• Room heating capacity (min - max)	m ³	3,4 - 8,5	
• Nominal heat output (min - max)	kW	89,8 - 91,3	
• Thermal efficiency (min - max)	%	0,7 - 1,9	
• Nominal consumption (min - max)	kg/h	14	
• Hopper capacity	kg	146	
• Stove weight	kg	15	
• PMnom (13% O ₂)	mg/Nm ³	3	
• OGCnom (13% O ₂)	mg/Nm ³		



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.825,00
Cladding	BIANCO	P19220100C	735,00
	NERO	P19220110C	735,00
Stove	P220 T TOP FLUE OUTLET	P07220110C	4.090,00
Accessories on request			
Top-rear flue kit		P08062170C	120,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062050C	360,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017C	20,00
			<small>per linear metre</small>

Top flue outlet

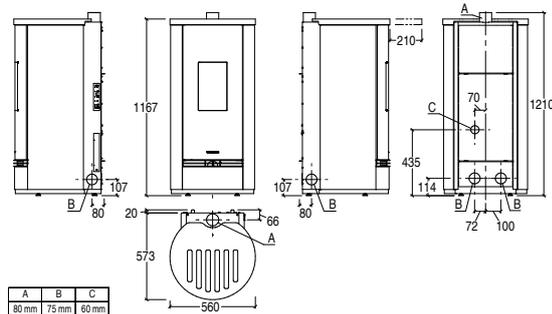

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 T Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P220 T FR/G
• Type		SP400-12A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	142
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
---------	--	--	--

TOTAL STOVE			4.950,00
Cladding	BIANCO CALCE	P06142940C	1.055,00
with glass front panel	NERO OPACO	P06142160C	1.055,00
	TERRA COTTA	P06142090C	1.055,00


TOTAL STOVE			5.050,00
Cladding	BIANCO GRIGIO	P06142410C	1.155,00
with glass front panel	MARRONE TENNÉ	P061423B0C	1.155,00
	ROSSO LAVA	P06142450C	1.155,00

Stove	P220 T REAR FLUE OUTLET	P07220600C	3.895,00
-------	-------------------------	------------	----------

Accessories on request

Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

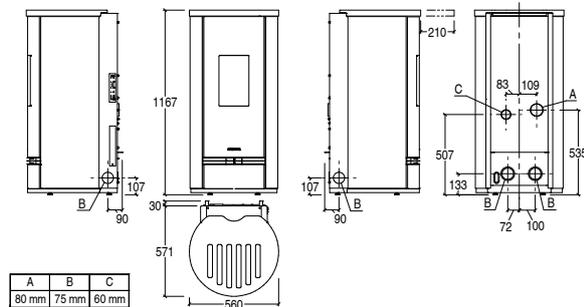

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 T TOP Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

TOP flue outlet

Model	Room heating capacity (min - max) m ³	Nominal heat output (min - max) kW	Thermal efficiency (min - max) %	Nominal consumption (min - max) kg/h	Hopper capacity kg	Stove weight kg	PMnom (13% O ₂) mg/Nm ³	OGCnom (13% O ₂) mg/Nm ³
P220 T FR/G TOP	145 - 245	3,4 - 8,5	89,8 - 91,3	0,7 - 1,9	14	145	15	3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE	5.145,00		
Cladding	BIANCO CALCE	P06142940C	1.055,00
with glass front panel	NERO OPACO	P06142160C	1.055,00
	TERRA COTTA	P06142090C	1.055,00

TOTAL STOVE	5.245,00		
Cladding	BIANCO GRIGIO	P06142410C	1.155,00
with glass front panel	MARRONE TENNÉ	P061423B0C	1.155,00
	ROSSO LAVA	P06142450C	1.155,00


Stove	P220 T TOP FLUE OUTLET	P07220110C	4.090,00
-------	------------------------	------------	----------

Accessories on request

Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062050C	360,00
Top-rear flue kit	P08062170C	120,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

Top flue outlet

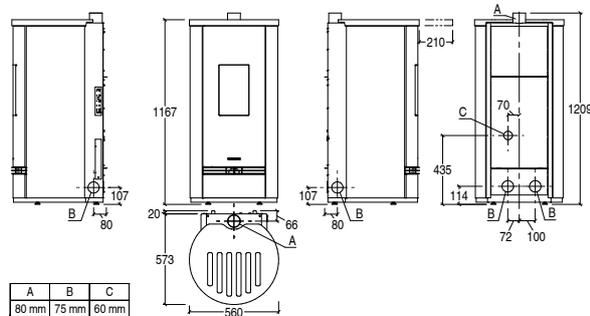

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 T STEEL Frontal Glass



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P220 T FR/G
• Type		SP400-12A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	142
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO


VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.630,00
Cladding with glass front panel	BIANCO	P19220300C 735,00
	NERO	P19220310C 735,00

Stove	P220 T REAR FLUE OUTLET	P07220600C	3.895,00
-------	-------------------------	------------	----------

Accessories on request

Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 <small>per linear metre</small>

Rear flue outlet

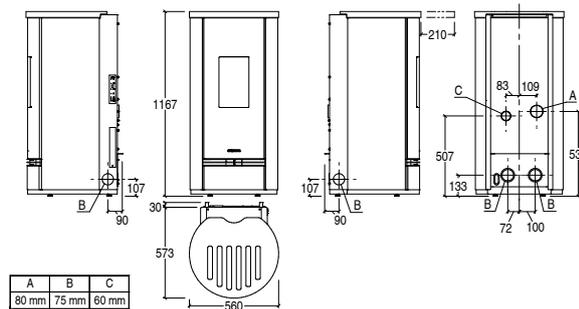

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P220 T TOP STEEL Frontal Glass



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


Model		TOP flue outlet
• Type		P220 T FR/G TOP
• Room heating capacity (min - max)	m ³	SP400-01
• Nominal heat output (min - max)	kW	145 - 245
• Thermal efficiency (min - max)	%	3,4 - 8,5
• Nominal consumption (min - max)	kg/h	89,8 - 91,3
• Hopper capacity	kg	0,7 - 1,9
• Stove weight	kg	14
• PMnom (13% O ₂)	mg/Nm ³	145
• OGCnom (13% O ₂)	mg/Nm ³	15
		3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.825,00
Cladding with glass front panel	BIANCO	P19220300C	735,00
	NERO	P19220310C	735,00
Stove	P220 T TOP FLUE OUTLET	P07220110C	4.090,00
Accessories on request			
Top-rear flue kit		P08062170C	120,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062050C	360,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017C	20,00 per linear metre

Top flue outlet

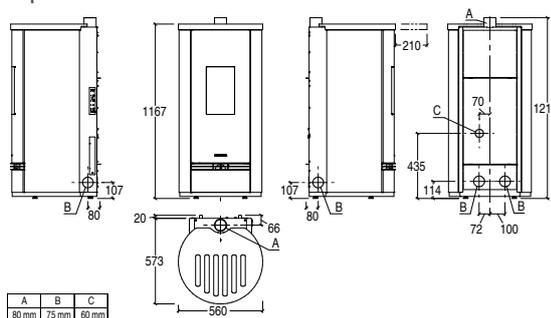

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P222



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica - steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron / painted steel
- Design door: serigraphed glass
- Standard flue outlet position: rear / top / RH side
- Top coaxial flue outlet: optional
- Optional flue outlet: top centre
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Optional side air vents: right and left
- Installation: wall - corner wall-flush
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P222
• Type		SP124-05
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	4,0 - 8,5
• Thermal efficiency (min - max)	%	87,5 - 87,5
• Nominal consumption (min - max)	kg/h	0,9 - 2,0
• Hopper capacity	kg	17
• Stove weight	kg	165



	CODE	EURO
TOTAL PRICE		
Cladding	BIANCO CALCE	P06236930C
	NERO OPACO	P06236160C
	TERRA COTTA	P06236090C
TOTAL PRICE		
Cladding	BIANCO GRIGIO	P06236410C
	MARRONE TENNÉ	P062363B0C
	ROSSO LAVA	P06236450C
Stove	P222	P07022200C
Accessories on request		
Side warm air vent kit	-	-
Top coaxial flue kit Ø 80/130	-	-
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

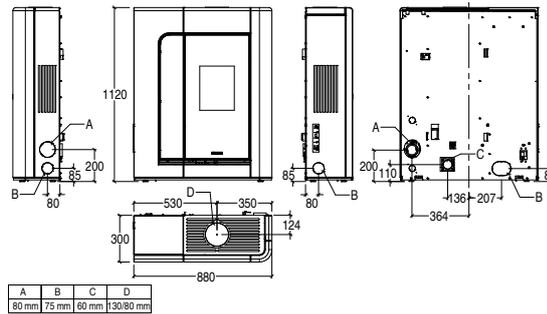

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P230 C
• Type		SP410-12A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90 - 92
• Nominal consumption (min - max)	kg/h	0,90 - 2,48
• Hopper capacity	kg	27,5
• Stove weight	kg	187
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.700,00
Cladding	BIANCO	P06144300C 1.320,00
	CANAPA	P06144350C 1.320,00
	NERO OPACO	P06144160C 1.320,00
	VERDE MIRTO	P06144250C 1.320,00
TOTAL STOVE		5.790,00
Cladding	BIANCO GRIGIO	P06144410C 1.410,00
	ROSSO LAVA	P06144450C 1.410,00
Stove	P230 C REAR FLUE OUTLET	P07230500C 4.380,00
Accessories on request		
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

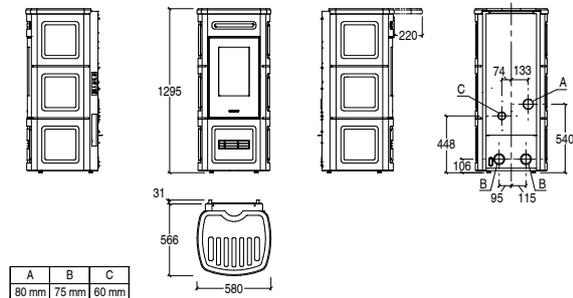

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 C TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O2) mg/Nm³
- OGCnom (13% O2) mg/Nm³

TOP flue outlet

P230 C TOP	
SP410-01	
185 - 315	
4,1 - 11,0	
91,5 - 91,8	
0,9 - 2,4	
21	
191	
14	
2	

CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
---------	---	--

TOTAL STOVE		5.900,00
-------------	--	-----------------

Cladding	BIANCO	P06144300C	1.320,00
	CANAPA	P06144350C	1.320,00
	NERO OPACO	P06144160C	1.320,00
	VERDE MIRTO	P06144250C	1.320,00

TOTAL STOVE		5.990,00
-------------	--	-----------------


Cladding	BIANCO GRIGIO	P06144410C	1.410,00
	ROSSO LAVA	P06144450C	1.410,00

Stove	P230 C TOP FLUE OUTLET	P07230010C	4.580,00
-------	------------------------	------------	----------

Accessories on request

Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062060C	360,00
Top-rear flue kit	P08062170C	120,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

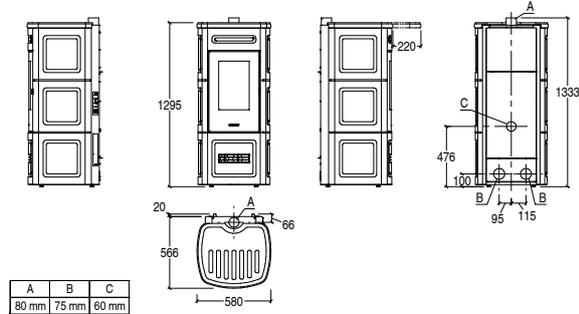

Dimensions in mm.



PELLET STOVES Premium Plus LINE

P230 C with base



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P230 C W/B
• Type		SP410-12A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90 - 92
• Nominal consumption (min - max)	kg/h	0,90 - 2,48
• Hopper capacity	kg	27,5
• Stove weight	kg	193
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1




CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.920,00
Cladding with stove base	BIANCO	P06145300C 1.540,00
	CANAPA	P06145350C 1.540,00
	NERO OPACO	P06145160C 1.540,00
	VERDE MIRTO	P06145250C 1.540,00
TOTAL STOVE		6.015,00
Cladding with stove base	BIANCO GRIGIO	P06145410C 1.635,00
	ROSSO LAVA	P06145450C 1.635,00
Stove	P230 C REAR FLUE OUTLET	P07230500C 4.380,00

Accessories on request

Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

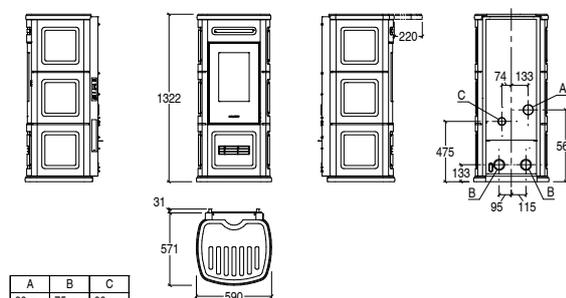

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 C TOP with base



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		
• Type		
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	197
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2


TOP flue outlet

P230 C W/B TOP

SP410-01
185 - 315
4,1 - 11,0
91,5 - 91,8
0,9 - 2,4
21
197
14
2

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			6.120,00
Cladding with stove base	BIANCO	P06145300C	1.540,00
	CANAPA	P06145350C	1.540,00
	NERO OPACO	P06145160C	1.540,00
	VERDE MIRTO	P06145250C	1.540,00
TOTAL STOVE			6.215,00
Cladding with stove base	BIANCO GRIGIO	P06145410C	1.635,00
	ROSSO LAVA	P06145450C	1.635,00
Stove	P230 C TOP FLUE OUTLET	P07230010C	4.580,00
Accessories on request			
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062060C	360,00
Top-rear flue kit		P08062170C	120,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

Top flue outlet

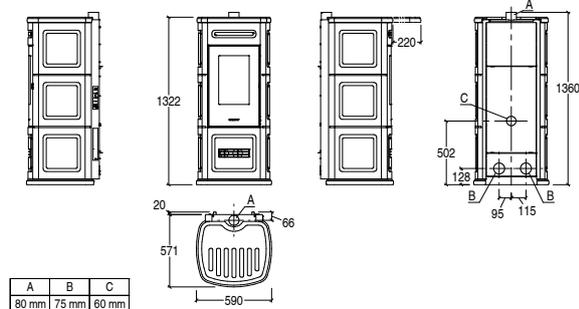

Dimensions in mm.



PELLET STOVES Premium Plus LINE

P230 M



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


TECHNICAL DATA		REAR flue outlet
• Model		P230 M
• Type		SP410-12A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90 - 92
• Nominal consumption (min - max)	kg/h	0,90 - 2,48
• Hopper capacity	kg	27,5
• Stove weight	kg	193
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.685,00
Cladding	BIANCO CALCE	P06148940C 1.185,00
	NERO OPACO	P06148160C 1.185,00
	TERRA COTTA	P06148090C 1.185,00
TOTAL STOVE		5.780,00
Cladding	BIANCO GRIGIO	P06148410C 1.280,00
	MARRONE TENNÉ	P061483B0C 1.280,00
	ROSSO LAVA	P06148450C 1.280,00
Stove	P230 M REAR FLUE OUTLET	P07230700C 4.500,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 <small>per linear metre</small>

Rear flue outlet

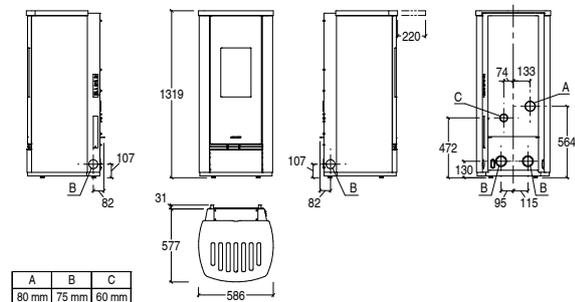

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 M TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet
• Model		P230 M TOP
• Type		SP410-01
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	197
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.880,00
Cladding	BIANCO CALCE	P06148940C 1.185,00
	NERO OPACO	P06148160C 1.185,00
	TERRA COTTA	P06148090C 1.185,00
TOTAL STOVE		5.975,00
Cladding	BIANCO GRIGIO	P06148410C 1.280,00
	MARRONE TENNÉ	P061483B0C 1.280,00
	ROSSO LAVA	P06148450C 1.280,00
Stove	P230 M TOP FLUE OUTLET	P07230210C 4.695,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062060C	360,00
Top-rear flue kit	P08062170C	120,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

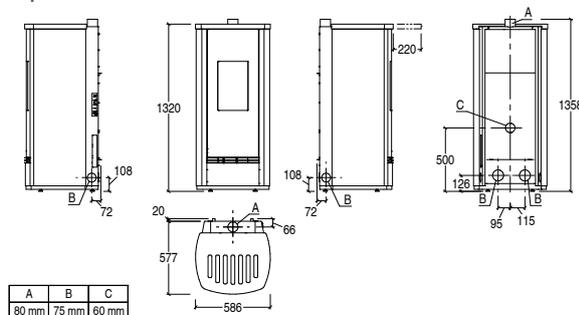

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 M STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

REAR flue outlet


P230 M STEEL	
SP410-12A	
185 - 315	
3,9 - 11,0	
90 - 92	
0,90 - 2,48	
27,5	
167	
10	
1	



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.295,00
Cladding	BIANCO	P19230200C 795,00
	NERO	P19230210C 795,00
Stove	P230 M REAR FLUE OUTLET	P07230700C 4.500,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

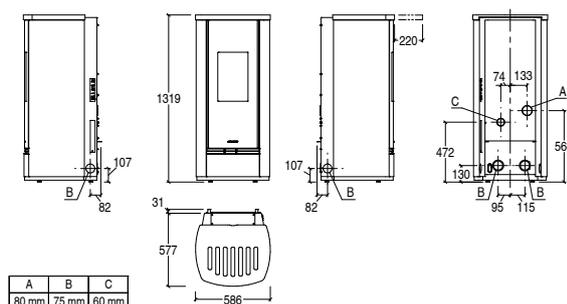

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 M TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max)
- Nominal heat output (min - max)
- Thermal efficiency (min - max)
- Nominal consumption (min - max)
- Hopper capacity
- Stove weight
- PMnom (13% O₂)
- OGCnom (13% O₂)


		TOP flue outlet	
		P230 M TOP STEEL	
		SP410-01	
	m ³	185 - 315	
	kW	4,1 - 11,0	
	%	91,5 - 91,8	
	kg/h	0,9 - 2,4	
	kg	21	
	kg	197	
	mg/Nm ³	14	
	mg/Nm ³	2	



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			5.490,00
Cladding	BIANCO	P19230200C	795,00
	NERO	P19230210C	795,00
Stove	P230 M TOP FLUE OUTLET	P07230210C	4.695,00
Accessories on request			
Top-rear flue kit		P08062170C	120,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062060C	360,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017C	20,00 <small>per linear metre</small>

Top flue outlet

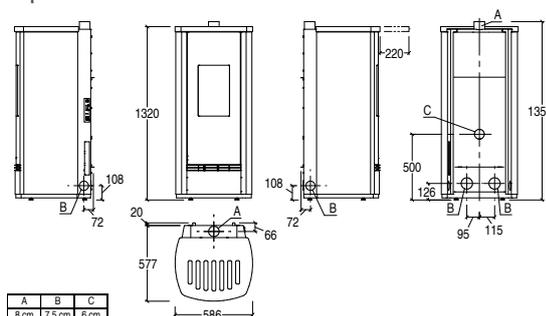

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


TECHNICAL DATA		REAR flue outlet
• Model		P230 T
• Type		SP410-12A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90 - 92
• Nominal consumption (min - max)	kg/h	0,90 - 2,48
• Hopper capacity	kg	27,5
• Stove weight	kg	186
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.685,00
Cladding	BIANCO CALCE	P06146940C 1.185,00
	NERO OPACO	P06146160C 1.185,00
	TERRA COTTA	P06146090C 1.185,00
TOTAL STOVE		5.780,00
Cladding	BIANCO GRIGIO	P06146410C 1.280,00
	MARRONE TENNÉ	P061463B0C 1.280,00
	ROSSO LAVA	P06146450C 1.280,00
Stove	P230 T REAR FLUE OUTLET	P07230600C 4.500,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

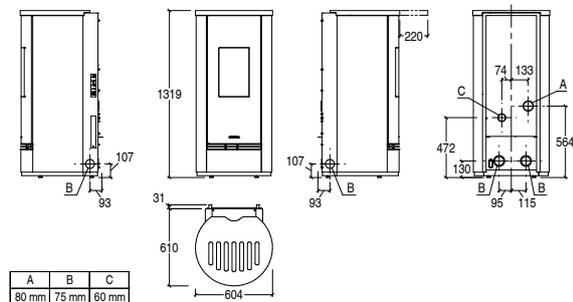

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet
• Model		P230 T TOP
• Type		SP410-01
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	190
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			5.880,00
Cladding	BIANCO CALCE	P06146940C	1.185,00
	NERO OPACO	P06146160C	1.185,00
	TERRA COTTA	P06146090C	1.185,00
TOTAL STOVE			5.975,00
Cladding	BIANCO GRIGIO	P06146410C	1.280,00
	MARRONE TENNÉ	P061463B0C	1.280,00
	ROSSO LAVA	P06146450C	1.280,00
Stove	P230 T TOP FLUE OUTLET	P07230110C	4.695,00
Accessories on request			
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062060C	360,00
Top-rear flue kit		P08062170C	120,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 <small>per linear metre</small>

Top flue outlet

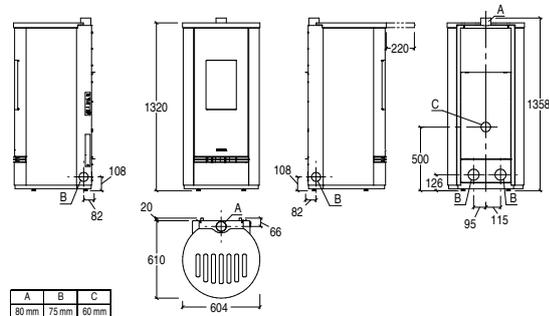

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P230 T STEEL
• Type		SP410-12A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90 - 92
• Nominal consumption (min - max)	kg/h	0,90 - 2,48
• Hopper capacity	kg	27,5
• Stove weight	kg	186
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	5.295,00	
Cladding	BIANCO	P19230100C 795,00
	NERO	P19230110C 795,00
Stove	P230 T REAR FLUE OUTLET	P07230600C 4.500,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

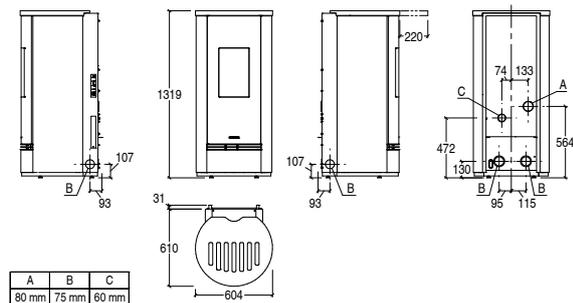

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet
• Model		SP410-01
• Type		185 - 315
• Room heating capacity (min - max)	m ³	4,1 - 11,0
• Nominal heat output (min - max)	kW	91,5 - 91,8
• Thermal efficiency (min - max)	%	0,9 - 2,4
• Nominal consumption (min - max)	kg/h	21
• Hopper capacity	kg	190
• Stove weight	kg	14
• PMnom (13% O ₂)	mg/Nm ³	2
• OGCnom (13% O ₂)	mg/Nm ³	



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.490,00
Cladding	BIANCO	P19230100C 795,00
	NERO	P19230110C 795,00
Stove	P230 T TOP FLUE OUTLET	P07230110C 4.695,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062060C	360,00
Top-rear flue kit	P08062170C	120,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 <small>per linear metre</small>

Top flue outlet

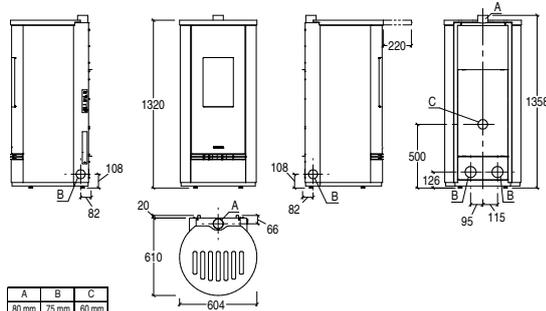

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


TECHNICAL DATA		REAR flue outlet
• Model		P230 T FR/G
• Type		SP410-12A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90 - 92
• Nominal consumption (min - max)	kg/h	0,90 - 2,48
• Hopper capacity	kg	27,5
• Stove weight	kg	184
• PM _{nom} (13% O ₂)	mg/Nm ³	10
• OGC _{nom} (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	5.685,00	
Cladding with glass front panel	BIANCO CALCE	P06147940C 1.185,00
	NERO OPACO	P06147160C 1.185,00
	TERRA COTTA	P06147090C 1.185,00
TOTAL STOVE	5.780,00	
Cladding with glass front panel	BIANCO GRIGIO	P06147410C 1.280,00
	MARRONE TENNÉ	P061473B0C 1.280,00
	ROSSO LAVA	P06147450C 1.280,00
Stove	P230 T REAR FLUE OUTLET	P07230600C 4.500,00
Accessories on request		
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08063150C	55,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

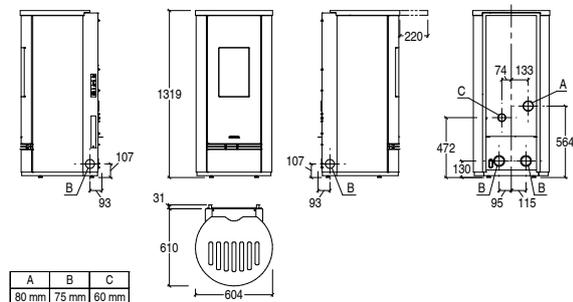

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T TOP Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		TOP flue outlet
• Model		P230 T FR/G TOP
• Type		SP410-01
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	188
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2




CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.880,00
Cladding	BIANCO CALCE	P06147940C 1.185,00
with glass front panel	NERO OPACO	P06147160C 1.185,00
	TERRA COTTA	P06147090C 1.185,00
TOTAL STOVE		5.975,00
Cladding	BIANCO GRIGIO	P06147410C 1.280,00
with glass front panel	MARRONE TENNÉ	P061473B0C 1.280,00
	ROSSO LAVA	P06147450C 1.280,00
Stove	P230 T TOP FLUE OUTLET	P07230110C 4.695,00

Accessories on request

Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062180C	55,00
Top coaxial flue kit Ø 80/130	P08062060C	360,00
Top-rear flue kit	P08062170C	120,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

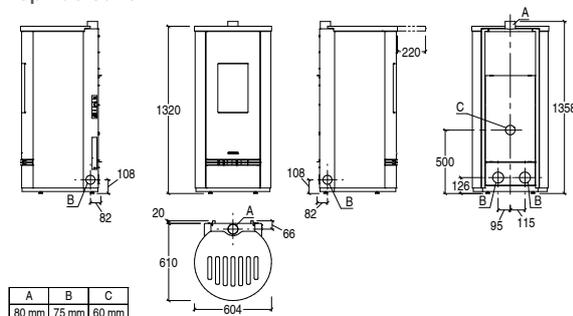

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T STEEL Frontal Glass



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet	
		P230 T FR/G STEEL	
• Model		SP410-12A	
• Type		185 - 315	
• Room heating capacity (min - max)	m ³	3,9 - 11,0	
• Nominal heat output (min - max)	kW	90 - 92	
• Thermal efficiency (min - max)	%	0,90 - 2,48	
• Nominal consumption (min - max)	kg/h	27,5	
• Hopper capacity	kg	184	
• Stove weight	kg	10	
• PMnom (13% O ₂)	mg/Nm ³	1	
• OGCnom (13% O ₂)	mg/Nm ³		



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			5.295,00
Cladding with glass front panel	BIANCO	P19230300C	795,00
	NERO	P19230310C	795,00
Stove	P230 T REAR FLUE OUTLET	P07230600C	4.500,00
Accessories on request			
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08063150C	55,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 <small>per linear metre</small>

Rear flue outlet

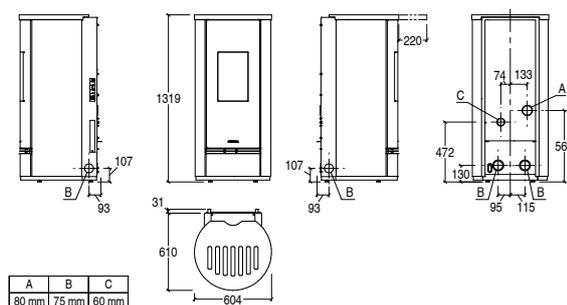

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P230 T TOP STEEL Frontal Glass



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max)
- Nominal heat output (min - max)
- Thermal efficiency (min - max)
- Nominal consumption (min - max)
- Hopper capacity
- Stove weight
- PMnom (13% O₂)
- OGCnom (13% O₂)


		TOP flue outlet	
		P230 T FR/G TOP STEEL	
		SP410-01	
	m ³	185 - 315	
	kW	4,1 - 11,0	
	%	91,5 - 91,8	
	kg/h	0,9 - 2,4	
	kg	21	
	kg	188	
	mg/Nm ³	14	
	mg/Nm ³	2	



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			5.490,00
Cladding with glass front panel	BIANCO	P19230300C	795,00
	NERO	P19230310C	795,00
Stove	P230 T TOP FLUE OUTLET	P07230110C	4.695,00
Accessories on request			
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062180C	55,00
Top coaxial flue kit Ø 80/130		P08062060C	360,00
Top-rear flue kit		P08062170C	120,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017C	20,00 per linear metre

Top flue outlet

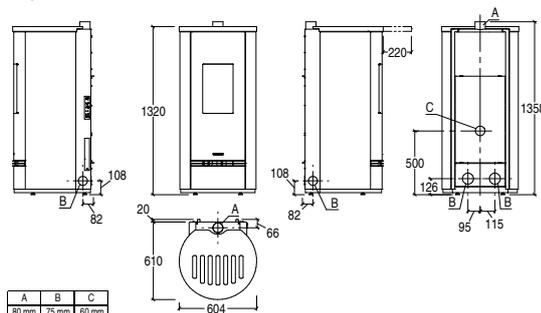

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P240



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel - majolica / steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with screen-printed tempered glass
- Standard flue outlet position: top or rear
- Optional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P240
• Model		SP400-06
• Type		145 - 245
• Room heating capacity (min - max)	m ³	3,6 - 8,5
• Nominal heat output (min - max)	kW	92,3 - 93,2
• Thermal efficiency (min - max)	%	0,8 - 1,9
• Nominal consumption (min - max)	kg/h	30
• Hopper capacity	kg	250
• Stove weight	kg	15
• PMnom (13% O ₂)	mg/Nm ³	2
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL STOVE			6.850,00
Cladding	BIANCO CALCE	P06159940C	1.045,00
	NERO OPACO	P06159160C	1.045,00
	TERRA COTTA	P06159090C	1.045,00
TOTAL STOVE			6.940,00
Cladding	BIANCO GRIGIO	P06159410C	1.135,00
	MARRONE TENNÉ	P061593B0C	1.135,00
	ROSSO LAVA	P06159450C	1.135,00
Stove	P240	P07024000C	5.805,00
Accessories on request			
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Top coaxial flue kit Ø 80/130		P08062780C	210,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

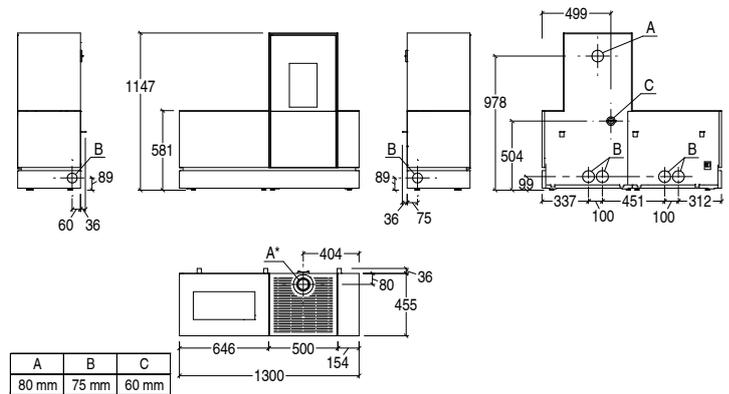

Dimensions in mm.

PELLET STOVES Premium Plus LINE

P241



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: steel with majolica panel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P241
• Type		SP400-10A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,75 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	170
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.090,00
Cladding	BIANCO CALCE	P06241930C 1.075,00
	NERO OPACO	P06241160C 1.075,00
	TERRA COTTA	P06241090C 1.075,00
TOTAL STOVE		5.175,00
Cladding	BLU VERDEMARE	P06241110C 1.160,00
	GIALLO ACCESO	P06241260C 1.160,00
	MARRONE TENNÉ	P062413B0C 1.160,00
	ROSSO LAVA	P06241450C 1.160,00
Stove	P241 REAR FLUE OUTLET	P07092600C 4.015,00
Accessories on request		
Rear union for wall ducting connection	N08019042C	35,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

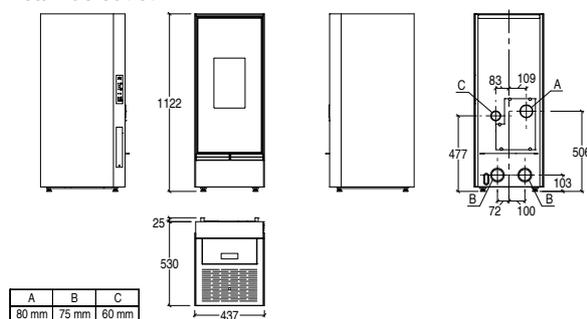

Dimensions in mm.

Premium LINE

PELLET STOVES Premium Line

P910 T Frontal Glass	64
P910 T TOP Frontal Glass	65
P910 T STEEL Frontal Glass	66
P910 T TOP STEEL Frontal Glass	67
P920 C	68
P920 C TOP	69
P920 K	70
P920 K TOP	71
P920 M	72
P920 M TOP	73
P920 M STEEL	74
P920 M TOP STEEL	75
P920 T	76
P920 T TOP	77
P920 T STEEL	78
P920 T TOP STEEL	79
P921 R	80
P921 T Frontal Glass	81
P921 T TOP Frontal Glass	82
P921 T STEEL Frontal Glass	83
P921 T TOP STEEL Frontal Glass	84
P925 Frontal Glass.	85
P930 C	86
P930 C TOP	87
P930 K	88
P930 K TOP	89
P930 M	90
P930 M TOP	91
P930 M STEEL	92
P930 M TOP STEEL	93
P930 T	94
P930 T TOP	95
P930 T STEEL	96
P930 T TOP STEEL	97
P931 R	98
LINE	99
P934	100
P939	101
P945 C	102
P945 TOP STEEL	103

Accessories	126
-----------------------	-----

PELLET STOVES Premium LINE

P910 T Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA *

• Model		P910 T FG
• Type		SP450-16A
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,8 - 6,0
• Thermal efficiency (min - max)	%	≥ 91 - ≥ 91
• Nominal consumption (min - max)	kg/h	0,63 - 1,37
• Hopper capacity	kg	15,5
• Stove weight	kg	160


REAR flue outlet

Model	P910 T FG
Type	SP450-16A
Room heating capacity (min - max)	100 - 175
Nominal heat output (min - max)	2,8 - 6,0
Thermal efficiency (min - max)	≥ 91 - ≥ 91
Nominal consumption (min - max)	0,63 - 1,37
Hopper capacity	15,5
Stove weight	160

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.740,00
Cladding	BIANCO CALCE	P06253940C 585,00
	NERO OPACO	P06253160C 585,00
TOTAL STOVE		4.850,00
Cladding	BIANCO GRIGIO	P06253410C 695,00
	MARRONE TENNE	P062533B0C 695,00
	ROSSO LAVA	P06253450C 695,00
Stove	P910 T FG C SCARICO POSTERIORE	P07096100C 4.155,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00

Rear flue outlet

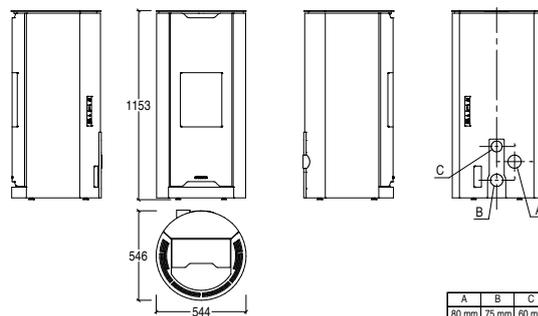

Dimensions in mm.



* Product currently being certified.

PELLET STOVES Premium LINE

P910 T TOP Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: top
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA *

• Model	
• Type	
• Room heating capacity (min - max)	m ³
• Nominal heat output (min - max)	kW
• Thermal efficiency (min - max)	%
• Nominal consumption (min - max)	kg/h
• Hopper capacity	kg
• Stove weight	kg

TOP flue outlet

P910 T TOP FG
SP450-15A
100 - 175
2,8 - 6,0
≥ 92 - ≥ 92
0,63 - 1,37
15,5
165




* Product currently being certified.

CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.925,00
Cladding	BIANCO CALCE	P06253940C 585,00
	NERO OPACO	P06253160C 585,00
TOTAL STOVE		5.035,00
Cladding	BIANCO GRIGIO	P06253410C 695,00
	MARRONE TENNE	P062533B0C 695,00
	ROSSO LAVA	P06253450C 695,00
Stove	P910 T FG C SCARICO SUPERIORE	P07096110C 4.340,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00

Top flue outlet

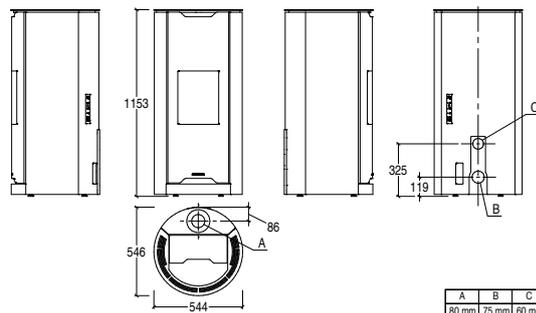

Dimensions in mm.

PELLET STOVES Premium LINE

P910 T STEEL Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA *

• Model		
• Type		
• Room heating capacity (min - max)	m ³	
• Nominal heat output (min - max)	kW	
• Thermal efficiency (min - max)	%	
• Nominal consumption (min - max)	kg/h	
• Hopper capacity	kg	
• Stove weight	kg	

REAR flue outlet

P910 T FG STEEL
SP450-16A
100 - 175
2,8 - 6,0
≥ 91 - ≥ 91
0,63 - 1,37
15,5
110




* Product currently being certified.

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.470,00
Cladding	BIANCO	P19921100C 315,00
	COR-TEN	P19921200C 315,00
	NERO	P19921300C 315,00
Stove	P910 T FG	P07096100C 4.155,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00

Rear flue outlet

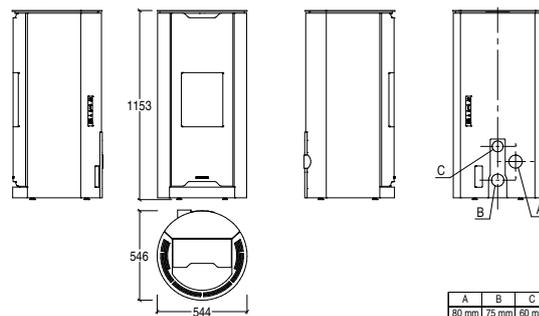

Dimensions in mm.

A	B	C
80 mm	75 mm	60 mm

PELLET STOVES Premium LINE

P910 T TOP STEEL Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: top
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA *

• Model		
• Type		
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,8 - 6,0
• Thermal efficiency (min - max)	%	≥ 92 - ≥ 92
• Nominal consumption (min - max)	kg/h	0,63 - 1,37
• Hopper capacity	kg	15,5
• Stove weight	kg	112

TOP flue outlet	
P910 T TOP STEEL Frontal Glass	
SP450-15A	
100 - 175	
2,8 - 6,0	
≥ 92 - ≥ 92	
0,63 - 1,37	
15,5	
112	




* Product currently being certified.

CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.655,00
Cladding	BIANCO	P19921100C 315,00
	COR-TEN	P19921200C 315,00
	NERO	P19921300C 315,00
Stove	P910 T TOP FG	P07096110C 4.340,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00

Top flue outlet

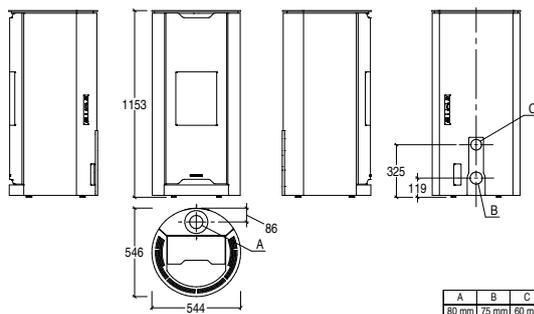

Dimensions in mm.

A	B	C
80 mm	75 mm	60 mm

PELLET STOVES Premium LINE

P920 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P920 C
• Type		SP400-10A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,75 - 1,95
• Hopper capacity	kg	18
• Stove weight	kg	147
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.130,00
Cladding	BIANCO	P06230300C	540,00
	NERO OPACO	P06230160C	540,00
	TERRA COTTA	P06230090C	540,00
TOTAL STOVE			4.235,00
Cladding (*)	BIANCO GRIGIO	P06230410C	645,00
	ROSSO LAVA	P06230450C	645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 C REAR FLUE OUTLET	P07092100C	3.590,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

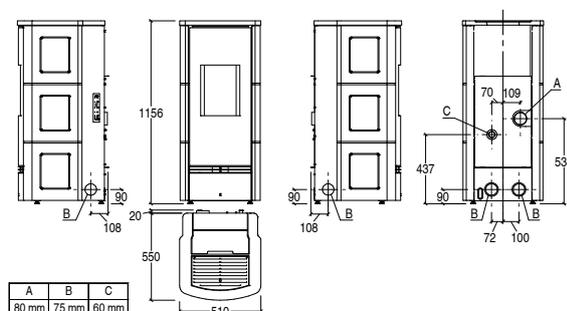

Dimensions in mm.

PELLET STOVES Premium LINE

P920 C TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Optional flue: top balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		TOP flue outlet
• Model		P920 C TOP
• Type		SP400-03
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,8 - 91,3
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	14
• Stove weight	kg	150
• PMnom (13% O ₂)	mg/Nm ³	15
• OGCnom (13% O ₂)	mg/Nm ³	3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.310,00
Cladding	BIANCO	P06230300C	540,00
	NERO OPACO	P06230160C	540,00
	TERRA COTTA	P06230090C	540,00
TOTAL STOVE			4.415,00
Cladding (*)	BIANCO GRIGIO	P06230410C	645,00
	ROSSO LAVA	P06230450C	645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 C TOP FLUE OUTLET	P07092810C	3.770,00
-------	------------------------	------------	----------

Accessories on request

Top-rear flue kit	P08062350C	115,00
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
Top coaxial flue kit Ø 80/130	N08010040C	360,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

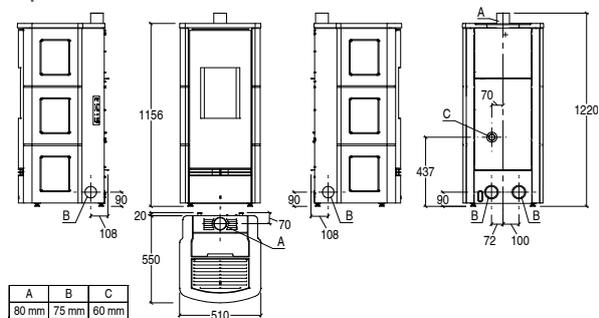

Dimensions in mm.

PELLET STOVES Premium LINE

P920 K



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

TECHNICAL DATA		REAR flue outlet	
• Model		P920 K	
• Type		SP400-10A	
• Room heating capacity (min - max)	m ³	145 - 245	
• Nominal heat output (min - max)	kW	3,3 - 8,5	
• Thermal efficiency (min - max)	%	91 - 91	
• Nominal consumption (min - max)	kg/h	0,75 - 1,95	
• Hopper capacity	kg	18	
• Stove weight	kg	153	
• PMnom (13% O ₂)	mg/Nm ³	10	
• OGCnom (13% O ₂)	mg/Nm ³	1	



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.130,00
Cladding	BIANCO	P06231300C	540,00
	NERO OPACO	P06231160C	540,00
	VERDE MIRTO	P06231250C	540,00
TOTAL STOVE			4.235,00
Cladding (*)	BIANCO GRIGIO	P06231410C	645,00
	ROSSO LAVA	P06231450C	645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 K REAR FLUE OUTLET	P07092000C	3.590,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

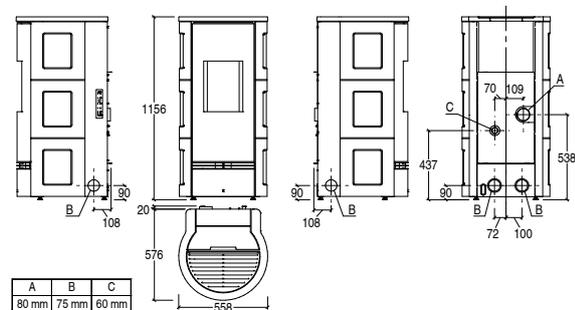

Dimensions in mm.

PELLET STOVES Premium LINE

P920 K TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Optional flue: top balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		TOP flue outlet
• Model		P920 K TOP
• Type		SP400-03
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,8 - 91,3
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	14
• Stove weight	kg	158
• PMnom (13% O ₂)	mg/Nm ³	15
• OGCnom (13% O ₂)	mg/Nm ³	3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.310,00
Cladding	BIANCO	P06231300C	540,00
	NERO OPACO	P06231160C	540,00
	VERDE MIRTO	P06231250C	540,00
TOTAL STOVE			4.415,00
Cladding (*)	BIANCO GRIGIO	P06231410C	645,00
	ROSSO LAVA	P06231450C	645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 K TOP FLUE OUTLET	P07092710C	3.770,00
-------	------------------------	------------	----------

Accessories on request

Top-rear flue kit	P08062350C	115,00
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
Top coaxial flue kit Ø 80/130	N08010040C	360,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

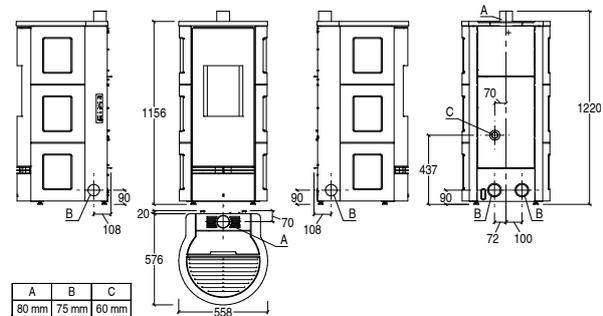

Dimensions in mm.

PELLET STOVES Premium LINE

P920 M



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P920 M
• Type		SP400-10A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,75 - 1,95
• Hopper capacity	kg	18
• Stove weight	kg	147
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.130,00
Cladding	BIANCO CALCE	P06179940C 540,00
	NERO OPACO	P06179160C 540,00
	TERRA COTTA	P06179090C 540,00
TOTAL STOVE		4.235,00
Cladding (*)	BIANCO GRIGIO	P06179410C 645,00
	ROSSO LAVA	P06179450C 645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 M REAR FLUE OUTLET	P07092100C	3.590,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

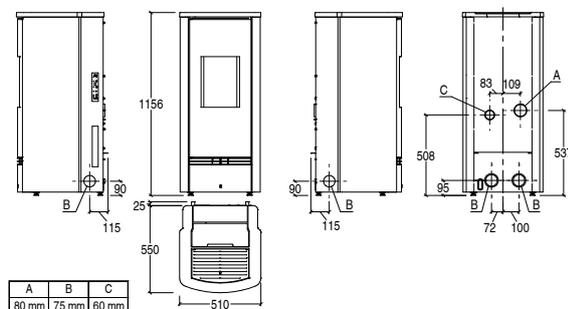

Dimensions in mm.

PELLET STOVES Premium LINE

P920 M TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Optional flue: top balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		TOP flue outlet
• Model		P920 M TOP
• Type		SP400-03
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,8 - 91,3
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	14
• Stove weight	kg	150
• PMnom (13% O ₂)	mg/Nm ³	15
• OGCnom (13% O ₂)	mg/Nm ³	3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.310,00
Cladding	BIANCO CALCE	P06179940C	540,00
	NERO OPACO	P06179160C	540,00
	TERRA COTTA	P06179090C	540,00

TOTAL STOVE			
			4.415,00
Cladding (*)	BIANCO GRIGIO	P06179410C	645,00
	ROSSO LAVA	P06179450C	645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 M TOP FLUE OUTLET	P07092810C	3.770,00
-------	------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Top-rear flue kit	P08062350C	115,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
Top coaxial flue kit Ø 80/130	N08010040C	360,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

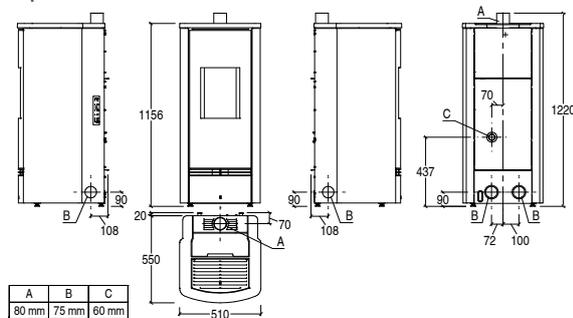

Dimensions in mm.

PELLET STOVES Premium LINE

P920 M STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		
• Type		
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,75 - 1,95
• Hopper capacity	kg	18
• Stove weight	kg	130
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1

REAR flue outlet


P920 M STEEL
SP400-10A
145 - 245
3,3 - 8,5
91 - 91
0,75 - 1,95
18
130
10
1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		3.890,00
Cladding	BIANCO	P19920200C 300,00
	NERO	P19920210C 300,00
Stove	P920 M REAR FLUE OUTLET	P07092100C 3.590,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

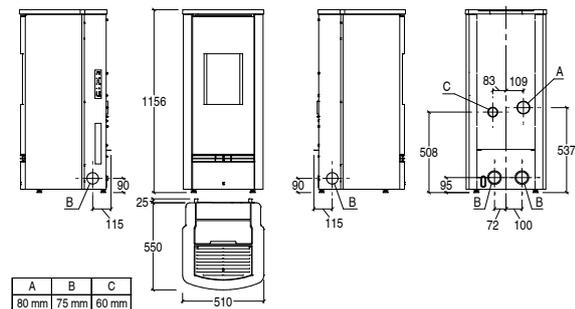

Dimensions in mm.

PELLET STOVES Premium LINE

P920 M TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet
• Model		P920 M TOP STEEL
• Type		SP400-03
• Room heating capacity (min - max)	m³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,8 - 91,3
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	14
• Stove weight	kg	150
• PM ₁₀ (13% O ₂)	mg/Nm³	15
• OG _{Cnom} (13% O ₂)	mg/Nm³	3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.070,00
Cladding	BIANCO	P19920200C 300,00
	NERO	P19920210C 300,00
Stove	P920 M TOP FLUE OUTLET	P07092810C 3.770,00
Accessories on request		
Top-rear flue kit	P08062350C	115,00
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
Top coaxial flue kit Ø 80/130	N08010040C	360,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Top flue outlet

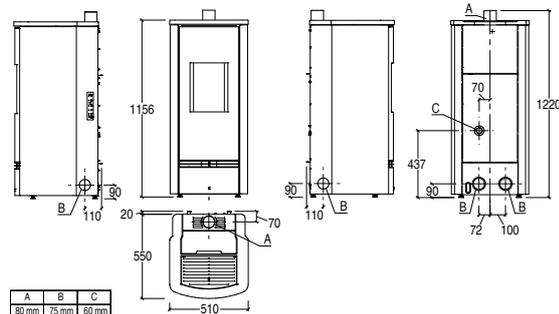

Dimensions in mm.

PELLET STOVES Premium LINE

P920 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P920 T
• Type		SP400-10A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,75 - 1,95
• Hopper capacity	kg	18
• Stove weight	kg	153
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.130,00
Cladding	BIANCO CALCE	P06178940C 540,00
	NERO OPACO	P06178160C 540,00
	TERRA COTTA	P06178090C 540,00
TOTAL STOVE		4.235,00
Cladding (*)	BIANCO GRIGIO	P06178410C 645,00
	ROSSO LAVA	P06178450C 645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 T REAR FLUE OUTLET	P07092000C	3.590,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

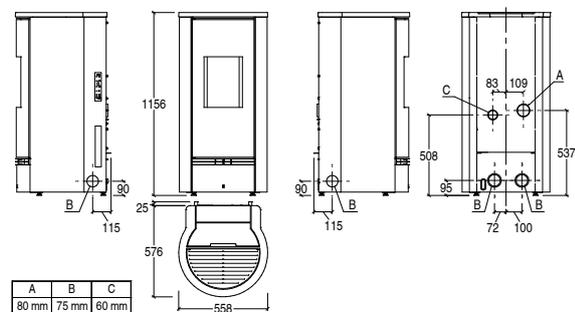

Dimensions in mm.

PELLET STOVES Premium LINE

P920 T TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Optional flue: top balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		TOP flue outlet
• Model		P920 T TOP
• Type		SP400-03
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,8 - 91,3
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	14
• Stove weight	kg	158
• PMnom (13% O ₂)	mg/Nm ³	15
• OGCnom (13% O ₂)	mg/Nm ³	3



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.310,00
Cladding	BIANCO CALCE	P06178940C	540,00
	NERO OPACO	P06178160C	540,00
	TERRA COTTA	P06178090C	540,00

TOTAL STOVE			
			4.415,00
Cladding (*)	BIANCO GRIGIO	P06178410C	645,00
	ROSSO LAVA	P06178450C	645,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P920 T TOP FLUE OUTLET	P07092710C	3.770,00
-------	------------------------	------------	----------

Accessories on request

Top-rear flue kit	P08062350C	115,00
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
Top coaxial flue kit Ø 80/130	N08010040C	360,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

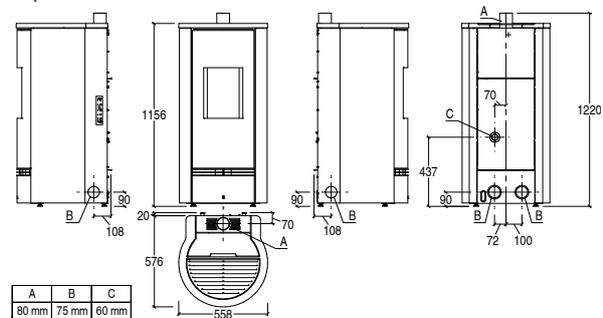

Dimensions in mm.

PELLET STOVES Premium LINE

P920 T STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

REAR flue outlet


P920 T STEEL	
SP400-10A	
Room heating capacity (min - max)	145 - 245
Nominal heat output (min - max)	3,3 - 8,5
Thermal efficiency (min - max)	91 - 91
Nominal consumption (min - max)	0,75 - 1,95
Hopper capacity	18
Stove weight	128
PMnom (13% O ₂)	10
OGCnom (13% O ₂)	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		3.890,00
Cladding	BIANCO	P19920300C 300,00
	NERO	P19920310C 300,00
Stove	P920 T REAR FLUE OUTLET	P07092000C 3.590,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062760C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

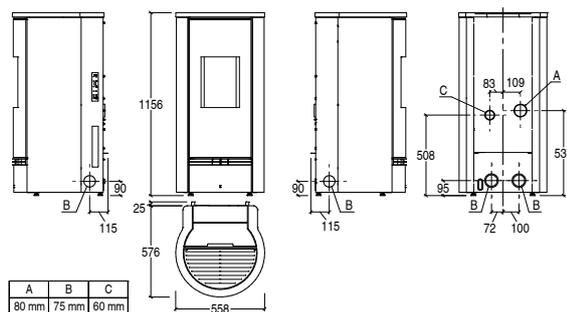

Dimensions in mm.

PELLET STOVES Premium LINE

P921 R



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P921 R
• Type		SP400-10A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,3 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,75 - 1,95
• Hopper capacity	kg	19,5
• Stove weight	kg	165
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.780,00
Cladding	BIANCO	P06240300C 1.160,00
	CANAPA	P06240350C 1.160,00
	NERO OPACO	P06240160C 1.160,00
	VERDE MIRTO	P06240250C 1.160,00

TOTAL STOVE		4.860,00
Cladding (*)	BIANCO GRIGIO	P06240410C 1.240,00
	ROSSO LAVA	P06240450C 1.240,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P921 R REAR FLUE OUTLET	P07094100C	3.620,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

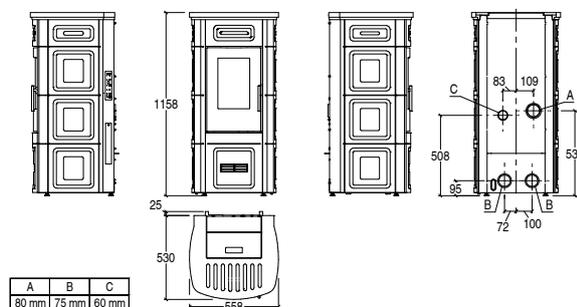

Dimensions in mm.

PELLET STOVES Premium LINE

P921 T Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P921 T FG
• Type		SP451-18A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	92 - 93
• Nominal consumption (min - max)	kg/h	0,76 - 1,91
• Hopper capacity	kg	15,5
• Stove weight	kg	155
• PMnom (13% O ₂)	mg/ Nm ³	7
• OGcnom (13% O ₂)	mg/ Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.740,00
Cladding	BIANCO CALCE	P06253940C 585,00
	NERO OPACO	P06253160C 585,00
TOTAL STOVE		4.850,00
Cladding	BIANCO GRIGIO	P06253410C 695,00
	MARRONE TENNE	P062533B0C 695,00
	ROSSO LAVA	P06253450C 695,00
Stove	P921 T FG SCARICO POSTERIORE	P07097100C 4.155,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00

Rear flue outlet

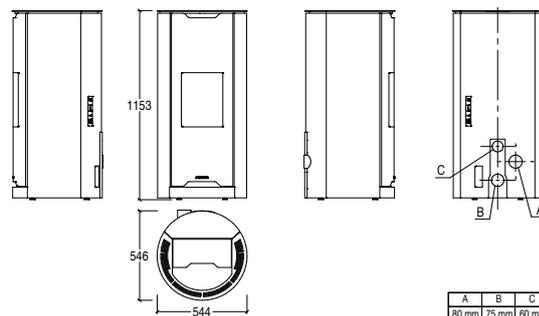

Dimensions in mm.

A	B	C
80 mm	75 mm	60 mm

PELLET STOVES Premium LINE

P921 T TOP Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: top
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


TECHNICAL DATA		TOP flue outlet
• Model		P921 T TOP FG
• Type		SP451-17A
• Room heating capacity (min - max)	m³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	94 - 94
• Nominal consumption (min - max)	kg/h	0,76 - 1,90
• Hopper capacity	kg	15,5
• Stove weight	kg	160
• PMnom (13% O2)	mg/Nm³	7
• OGCnom (13% O2)	mg/Nm³	1



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.925,00
Cladding	BIANCO CALCE	P06253940C 585,00
	NERO OPACO	P06253160C 585,00
TOTAL STOVE		5.035,00
Cladding	BIANCO GRIGIO	P06253410C 695,00
	MARRONE TENNE	P062533B0C 695,00
	ROSSO LAVA	P06253450C 695,00
Stove	P921 T TOP FG SCARICO SUPERIORE	P07097110C 4.340,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00

Top flue outlet

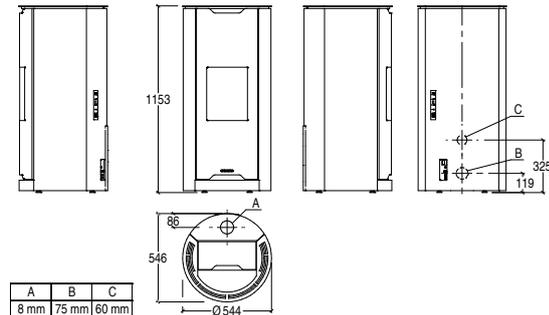

Dimensions in mm.

PELLET STOVES Premium LINE

P921 T STEEL Frontal Glass



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		REAR flue outlet
• Model		P921 T FG ST
• Type		SP451-18A
• Room heating capacity (min - max)	m³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	92 - 93
• Nominal consumption (min - max)	kg/h	0,76 - 1,91
• Hopper capacity	kg	15,5
• Stove weight	kg	115
• PMnom (13% O2)	mg/Nm³	7
• OGCnom (13% O2)	mg/Nm³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.470,00
Cladding	BIANCO	P19921100C 315,00
	COR-TEN	P19921200C 315,00
	NERO	P19921300C 315,00
Stove	P921 T FG	P07097100C 4.155,00
Accessories on request		
Wireless temperature probe kit		N08013024C 70,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C 35,00
Rear union for wall ducting connection		N08019042C 35,00

Rear flue outlet

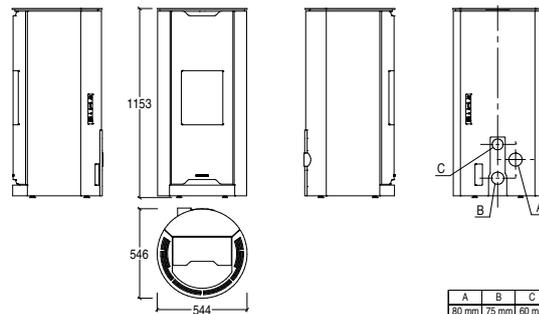

Dimensions in mm.

A	B	C
80 mm	75 mm	60 mm

PELLET STOVES Premium LINE

P921 T TOP STEEL Frontal Glass



GENERAL CHARACTERISTICS


- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Removable ash drawer: yes
- Standard flue outlet position: top
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		TOP flue outlet
• Model		P921 T TOP FG ST
• Type		SP451-17A
• Room heating capacity (min - max)	m³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	94 - 94
• Nominal consumption (min - max)	kg/h	0,76 - 1,90
• Hopper capacity	kg	15,5
• Stove weight	kg	105
• PMnom (13% O2)	mg/Nm³	7
• OGCnom (13% O2)	mg/Nm³	1

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.655,00
Cladding	BIANCO	P19921100C	315,00
	COR-TEN	P19921200C	315,00
	NERO	P19921300C	315,00
Stove	P921 T TOP FG ST	P07097110C	4.340,00
Accessories on request			
Wireless temperature probe kit		N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00

Top flue outlet

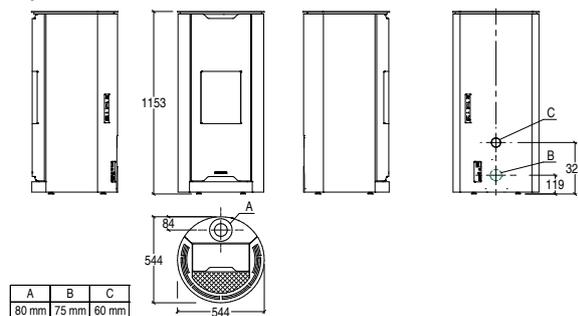

Dimensions in mm.



PELLET STOVES Premium LINE

P925 Frontal Glass



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top : majolica - steel / majolica - steel
- Rolling Top: top that slides
- Stove: airtight steel
- Firebox: steel - cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Design door: serigraphed glass
- Standard flue outlet position: rear / top / RH side
- Optional flue outlet: top central - Top balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Optional side air vents: right and left
- Installation : wall - flush
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P925 FG
• Model		SP124-04
• Type		145 - 245
• Room heating capacity (min - max)	m ³	4,0 - 8,5
• Nominal heat output (min - max)	kW	87,5 - 87,5
• Thermal efficiency (min - max)	%	0,9 - 2,0
• Nominal consumption (min - max)	kg/h	20
• Hopper capacity	kg	165
• Stove weight		



	CODE	EURO
TOTAL PRICE		
Cladding	BIANCO CALCE	P06242930C
	BIANCO - NERO OPACO	P06242301C
	NERO OPACO	P06242160C
TOTAL PRICE		
Cladding (*)	BIANCO GRIGIO	P06242410C
	MARRONE TENNÉ	P062423B0C
	ROSSO LAVA	P06242450C
Stove	P925 FG	P07081100C
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed side warm air vent kit	-	-
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

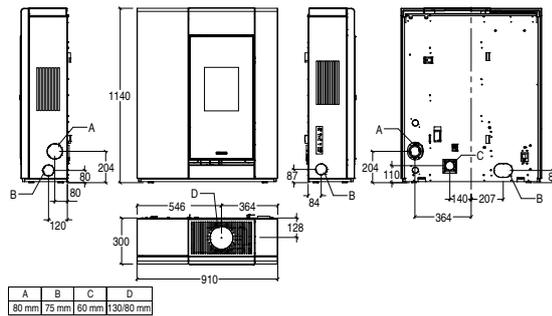

Dimensions in mm.

PELLET STOVES Premium LINE

P930 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P930 C
• Type		SP410-10A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,8 - 11,0
• Thermal efficiency (min - max)	%	90 - 91
• Nominal consumption (min - max)	kg/h	0,88 - 2,51
• Hopper capacity	kg	26
• Stove weight	kg	190
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.500,00
Cladding	BIANCO	P06232300C 580,00
	NERO OPACO	P06232160C 580,00
	TERRA COTTA	P06232090C 580,00
TOTAL STOVE		4.610,00
Cladding (*)	BIANCO GRIGIO	P06232410C 690,00
	ROSSO LAVA	P06232450C 690,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P930 C REAR FLUE OUTLET	P07093100C	3.920,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

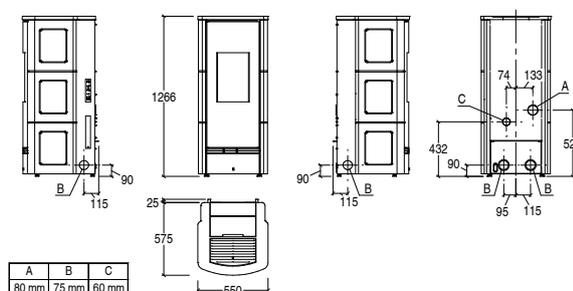

Dimensions in mm.

PELLET STOVES Premium LINE

P930 C TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P930 C TOP
• Type		SP410-03
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	195
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2

TOP flue outlet

P930 C TOP
SP410-03
185 - 315
4,1 - 11,0
91,5 - 91,8
0,9 - 2,4
21
195
14
2

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			4.705,00
Cladding	BIANCO	P06232300C	580,00
	NERO OPACO	P06232160C	580,00
	TERRA COTTA	P06232090C	580,00
TOTAL STOVE			4.815,00
Cladding (*)	BIANCO GRIGIO	P06232410C	690,00
	ROSSO LAVA	P06232450C	690,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P930 C TOP FLUE OUTLET	P07093810C	4.125,00
-------	------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
Top coaxial flue kit Ø 80/130	N08010041C	345,00
Top-rear flue kit	P08062360C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

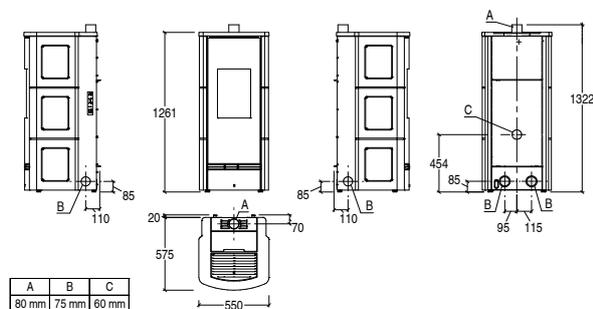

Dimensions in mm.



PELLET STOVES Premium LINE

P930 K



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P930 K
• Type		SP410-10A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,8 - 11,0
• Thermal efficiency (min - max)	%	90 - 91
• Nominal consumption (min - max)	kg/h	0,88 - 2,51
• Hopper capacity	kg	26
• Stove weight	kg	187
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.500,00
Cladding	BIANCO	P06233300C	580,00
	NERO OPACO	P06233160C	580,00
	VERDE MIRTO	P06233250C	580,00

TOTAL STOVE			4.610,00
Cladding (*)	BIANCO GRIGIO	P06233410C	690,00
	ROSSO LAVA	P06233450C	690,00


Stove	P930 K REAR FLUE OUTLET	P07093000C	3.920,00
-------	-------------------------	------------	----------

(*) The company reserves 30 days for processing the order from the confirmation date.

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

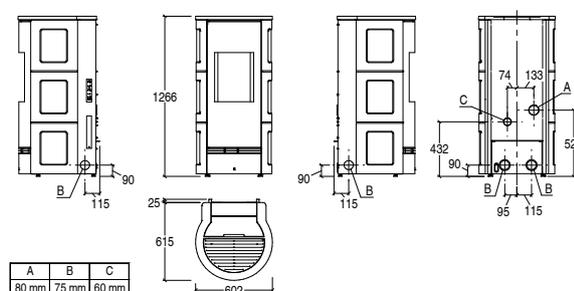

Dimensions in mm.

PELLET STOVES Premium LINE

P930 K TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

TOP flue outlet

P930 K TOP
SP410-03
185 - 315
4,1 - 11,0
91,5 - 91,8
0,9 - 2,4
21
192
14
2

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
---------	---	------	------

TOTAL STOVE			4.705,00
Cladding	BIANCO	P06233300C	580,00
	NERO OPACO	P06233160C	580,00
	VERDE MIRTO	P06233250C	580,00

TOTAL STOVE			4.815,00
Cladding (*)	BIANCO GRIGIO	P06233410C	690,00
	ROSSO LAVA	P06233450C	690,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P930 K TOP FLUE OUTLET	P07093710C	4.125,00
-------	------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Top-rear flue kit	P08062360C	115,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
Top coaxial flue kit Ø 80/130	N08010041C	345,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

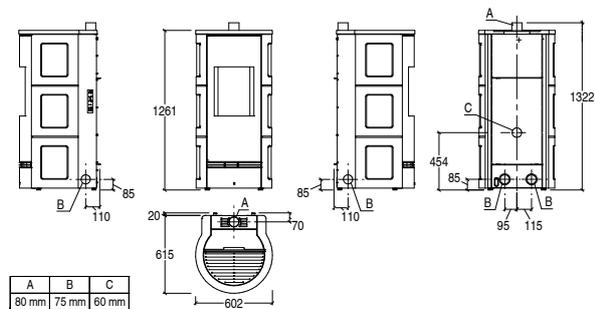

Dimensions in mm.



PELLET STOVES Premium LINE

P930 M



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P930 M
• Type		SP410-10A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,8 - 11,0
• Thermal efficiency (min - max)	%	90 - 91
• Nominal consumption (min - max)	kg/h	0,88 - 2,51
• Hopper capacity	kg	26
• Stove weight	kg	190
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.500,00
Cladding	BIANCO CALCE	P06189940C 580,00
	NERO OPACO	P06189160C 580,00
	TERRA COTTA	P06189090C 580,00
TOTAL STOVE		4.610,00
Cladding (*)	BIANCO GRIGIO	P06189410C 690,00
	ROSSO LAVA	P06189450C 690,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P930 M REAR FLUE OUTLET	P07093100C	3.920,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

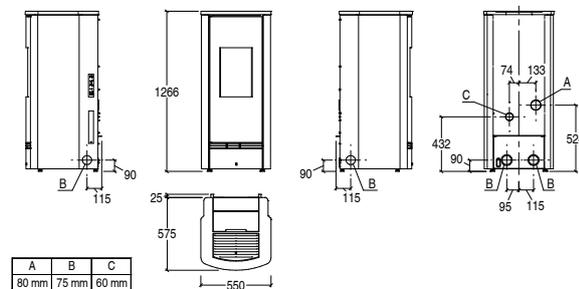

Dimensions in mm.

PELLET STOVES Premium LINE

P930 M TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P930 M TOP
• Type		SP410-03
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	195
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2

TOP flue outlet

	P930 M TOP
	SP410-03
	185 - 315
	4,1 - 11,0
	91,5 - 91,8
	0,9 - 2,4
	21
	195
	14
	2

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
TOTAL STOVE			4.705,00
Cladding	BIANCO CALCE	P06189940C	580,00
	NERO OPACO	P06189160C	580,00
	TERRA COTTA	P06189090C	580,00
TOTAL STOVE			4.815,00
Cladding (*)	BIANCO GRIGIO	P06189410C	690,00
	ROSSO LAVA	P06189450C	690,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P930 M TOP FLUE OUTLET	P07093810C	4.125,00
-------	------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
Top coaxial flue kit Ø 80/130	N08010041C	345,00
Top-rear flue kit	P08062360C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

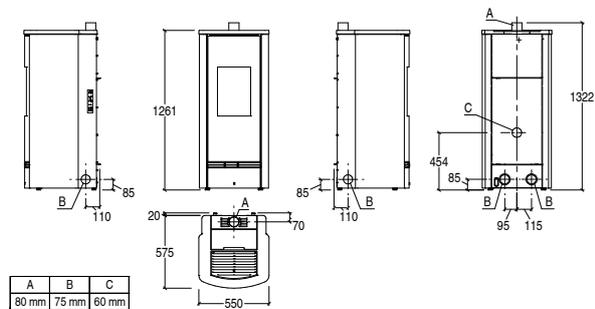

Dimensions in mm.



PELLET STOVES Premium LINE

P930 M STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³


REAR flue outlet

P930 M STEEL	
Type	SP410-10A
Room heating capacity (min - max)	185 - 315
Nominal heat output (min - max)	3,8 - 11,0
Thermal efficiency (min - max)	90 - 91
Nominal consumption (min - max)	0,88 - 2,51
Hopper capacity	26
Stove weight	190
PMnom (13% O ₂)	10
OGCnom (13% O ₂)	1

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	4.245,00	
Cladding	BIANCO	P19930200C 325,00
	NERO	P19930210C 325,00
Stove	P930 M REAR FLUE OUTLET	P07093100C 3.920,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

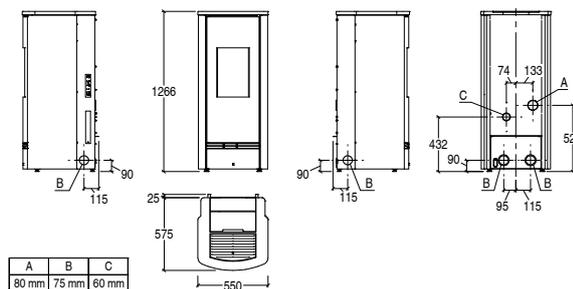

Dimensions in mm.



PELLET STOVES Premium LINE

P930 M TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet
• Model		P930 M TOP STEEL
• Type		SP410-03
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,1 - 11,0
• Thermal efficiency (min - max)	%	91,5 - 91,8
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	21
• Stove weight	kg	195
• PMnom (13% O ₂)	mg/Nm ³	14
• OGCnom (13% O ₂)	mg/Nm ³	2



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.450,00
Cladding	BIANCO	P19930200C	325,00
	NERO	P19930210C	325,00
Stove	P930 M TOP FLUE OUTLET	P07093810C	4.125,00
Accessories on request			
Wireless temperature probe kit		N08013024C	70,00
Top-rear flue kit		P08062360C	115,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062770C	115,00
Top coaxial flue kit Ø 80/130		N08010041C	345,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017C	20,00 per linear metre

Top flue outlet

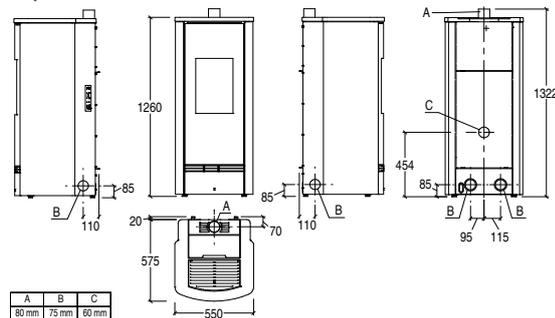

Dimensions in mm.

PELLET STOVES Premium LINE

P930 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P930 T
• Type		SP410-10A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,8 - 11,0
• Thermal efficiency (min - max)	%	90 - 91
• Nominal consumption (min - max)	kg/h	0,88 - 2,51
• Hopper capacity	kg	26
• Stove weight	kg	187
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO


VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		4.500,00
Cladding	BIANCO CALCE	P06188940C 580,00
	NERO OPACO	P06188160C 580,00
	TERRA COTTA	P06188090C 580,00
TOTAL STOVE		4.610,00
Cladding (*)	BIANCO GRIGIO	P06188410C 690,00
	ROSSO LAVA	P06188450C 690,00
Stove	P930 T REAR FLUE OUTLET	P07093000C 3.920,00

(*) The company reserves 30 days for processing the order from the confirmation date.

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

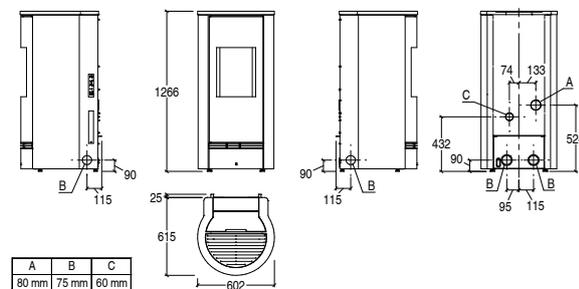

Dimensions in mm.

PELLET STOVES Premium LINE

P930 T TOP



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

TOP flue outlet

Model	Room heating capacity (min - max) m ³	Nominal heat output (min - max) kW	Thermal efficiency (min - max) %	Nominal consumption (min - max) kg/h	Hopper capacity kg	Stove weight kg	PMnom (13% O ₂) mg/Nm ³	OGCnom (13% O ₂) mg/Nm ³
P930 T TOP	185 - 315	4,1 - 11,0	91,5 - 91,8	0,9 - 2,4	21	192	14	2

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	CODE	EURO
---------	---	------	------

TOTAL STOVE			4.705,00
Cladding	BIANCO CALCE	P06188940C	580,00
	NERO OPACO	P06188160C	580,00
	TERRA COTTA	P06188090C	580,00

TOTAL STOVE			4.815,00
Cladding (*)	BIANCO GRIGIO	P06188410C	690,00
	ROSSO LAVA	P06188450C	690,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P930 T TOP FLUE OUTLET	P07093710C	4.125,00
-------	------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
Top coaxial flue kit Ø 80/130	N08010041C	345,00
Top-rear flue kit	P08062360C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Top flue outlet

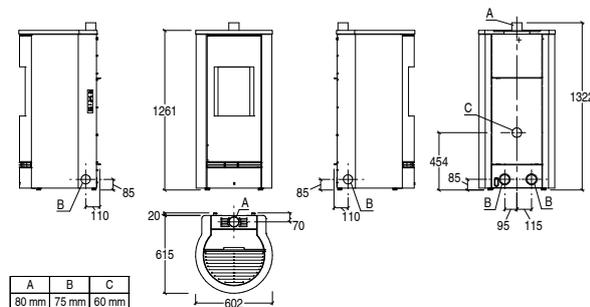

Dimensions in mm.



PELLET STOVES Premium LINE

P930 T STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Hopper capacity kg
- Stove weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³


REAR flue outlet

P930 T STEEL	
Model	SP410-10A
Room heating capacity (min - max)	185 - 315
Nominal heat output (min - max)	3,8 - 11,0
Thermal efficiency (min - max)	90 - 91
Nominal consumption (min - max)	0,88 - 2,51
Hopper capacity	26
Stove weight	187
PMnom (13% O ₂)	10
OGCnom (13% O ₂)	1

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	4.245,00	
Cladding	BIANCO	P19930300C 325,00
	NERO	P19930310C 325,00
Stove	P930 T REAR FLUE OUTLET	P07093000C 3.920,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Pellet loading kit	P08062770C	115,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017C	20,00 per linear metre

Rear flue outlet

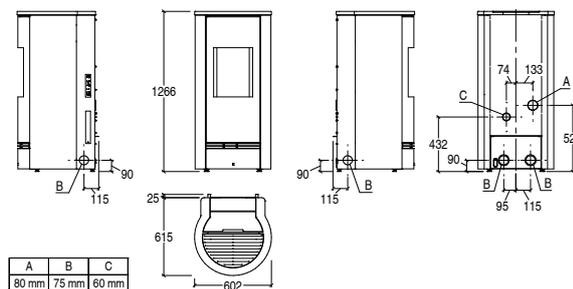

Dimensions in mm.



PELLET STOVES Premium LINE

P930 T TOP STEEL



Available while stocks last.

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel - cast iron
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with ceramic glass resistant up to 750°C / detachable
- Design door: painted steel
- Standard flue outlet position: top
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Conveyor: steel
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA


		TOP flue outlet	
		P930 T TOP STEEL	
• Model		SP410-03	
• Type		185 - 315	
• Room heating capacity (min - max)	m ³	4,1 - 11,0	
• Nominal heat output (min - max)	kW	91,5 - 91,8	
• Thermal efficiency (min - max)	%	0,9 - 2,4	
• Nominal consumption (min - max)	kg/h	21	
• Hopper capacity	kg	192	
• Stove weight	kg	14	
• PMnom (13% O ₂)	mg/Nm ³	2	
• OGCnom (13% O ₂)	mg/Nm ³		



CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			4.450,00
Cladding	BIANCO	P19930300C	325,00
	NERO	P19930310C	325,00
Stove	P930 T TOP FLUE OUTLET	P07093710C	4.125,00
Accessories on request			
Top-rear flue kit		P08062360C	115,00
Wireless temperature probe kit		N08013024C	70,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Rear union for wall ducting connection		N08019042C	35,00
Pellet loading kit		P08062770C	115,00
Top coaxial flue kit Ø 80/130		N08010041C	345,00
LCD remote control		P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air		N08011017C	20,00
			per linear metre

Top flue outlet

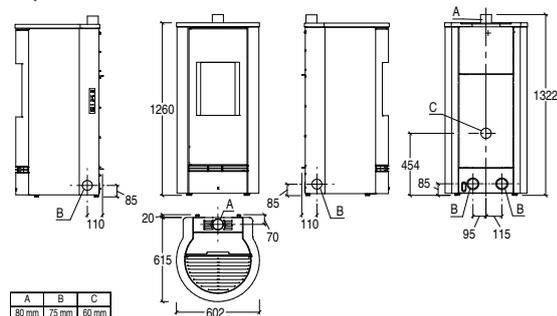

Dimensions in mm.

PELLET STOVES Premium LINE

P931 R



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		REAR flue outlet
• Model		P931 R
• Type		SP410-10A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,8 - 11,0
• Thermal efficiency (min - max)	%	90 - 91
• Nominal consumption (min - max)	kg/h	0,88 - 2,51
• Hopper capacity	kg	27,5
• Stove weight	kg	195
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		5.335,00
Cladding	BIANCO	P06250300C 1.380,00
	CANAPA	P06250350C 1.380,00
	NERO OPACO	P06250160C 1.380,00
	VERDE MIRTO	P06250250C 1.380,00
TOTAL STOVE		5.420,00
Cladding (*)	BIANCO GRIGIO	P06250410C 1.465,00
	ROSSO LAVA	P06250450C 1.465,00


(*) The company reserves 30 days for processing the order from the confirmation date.

Stove	P931 R REAR FLUE OUTLET	P07095100C	3.955,00
-------	-------------------------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

Rear flue outlet

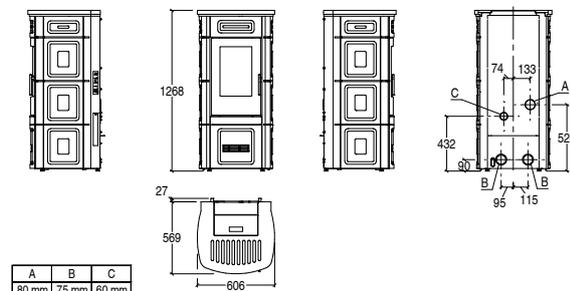

Dimensions in mm.

PELLET STOVES Premium LINE

LINE



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: fixed air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / painted steel, detachable
- Standard flue outlet position: rear / top right
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner wall-flush
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		LINE
• Model		SP360-01
• Type		150 - 260
• Room heating capacity (min - max)	m ³	4,0 - 9,0
• Nominal heat output (min - max)	kW	88,9 - 90,3
• Thermal efficiency (min - max)	%	0,9 - 2,0
• Nominal consumption (min - max)	kg/h	16
• Hopper capacity	kg	158
• Stove weight	kg	13
• PMnom (13% O ₂)	mg/Nm ³	2
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			5.185,00
Cladding	BIANCO ANTICO	P06360640C	890,00
	GRIGIO CERATO	P06360310C	890,00
	SAHARA	P06360220C	890,00
	TERRA COTTA	P06360090C	890,00
TOTAL PRICE			5.310,00
Cladding	GIALLO ACCESO	P06360260C	1.015,00
	ROSSO LAVA	P06360450C	1.015,00
Stove	LINE SP360	P07083600C	4.295,00
Accessories on request			
	Wireless temperature probe kit	N08013024C	70,00
	Rear union for wall ducting connection	N08019042C	35,00
	Top coaxial flue kit Ø 80/130	N08011038C	175,00
	LCD remote control	P08062070C	125,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

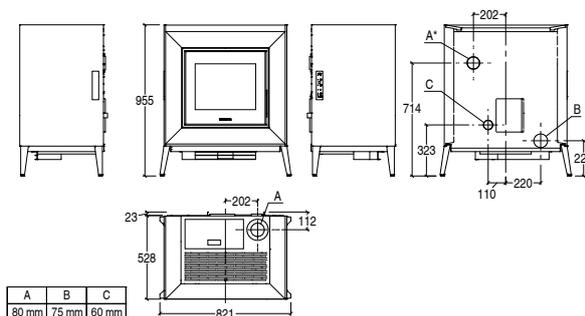

Dimensions in mm.

PELLET STOVES Premium LINE

P934



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron / painted steel
- Design door: steel with screen-printed tempered glass
- Removable ash drawer: yes
- Standard flue outlet position: rear, right / right side / top, right
- LCD remote control: yes
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Optional side air vents: right and left
- Installation: wall - corner wall-flush

TECHNICAL DATA

• Model		P934
• Type		SL32-03
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	4,0 - 8,5
• Thermal efficiency (min - max)	%	87,5 - 87,5
• Nominal consumption (min - max)	kg/h	0,9 - 2,0
• Hopper capacity	kg	20
• Stove weight	kg	150
• PMnom (13% O ₂)	mg/Nm ³	20
• OGCnom (13% O ₂)	mg/Nm ³	2



		CODE	EURO
TOTAL PRICE			4.945,00
Cladding	BIANCO	P06199300C	1.125,00
	BIANCO GRIGIO	P06199410C	1.125,00
	GRIGIO CERATO	P06199310C	1.125,00
	NERO OPACO	P06199160C	1.125,00
	ROSSO LAVA	P06199450C	1.125,00
	TERRA COTTA	P06199090C	1.125,00
Stove	P934	P07934000C	3.820,00
Accessories on request			
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Top coaxial flue kit		P08061780C	260,00
Wi-Fi module for Piazzetta App		N08013022C	360,00
Combustion air kit		N08010029C	105,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre
Ash vacuum cleaner		N08019040C	105,00

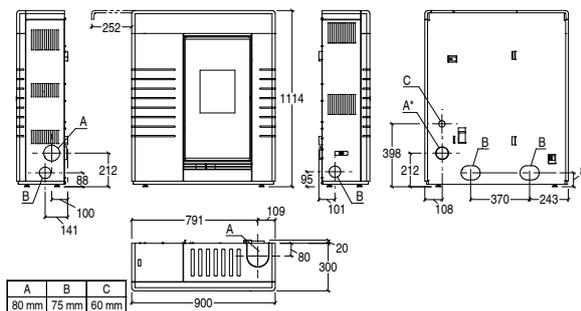

Dimensions in mm.

PELLET STOVES Premium LINE

P939



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Rolling Top: top that slides
- Stove: steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / steel
- Door / Handle: cast iron / steel
- Design door: tempered glass
- Removable ash drawer: yes
- Standard flue outlet position: rear right - right side
- Optional flue outlet: top right
- LCD remote control: yes
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Optional side air vents: right and left
- Installation: wall - corner wall-flush

TECHNICAL DATA

		P939
• Model		SP356-01
• Type		175 - 300
• Room heating capacity (min - max)	m ³	4,1 - 10,5
• Nominal heat output (min - max)	kW	88,5 - 90,3
• Thermal efficiency (min - max)	%	0,9 - 2,4
• Nominal consumption (min - max)	kg/h	25
• Hopper capacity	kg	210
• Stove weight	kg	20
• PMnom (13% O ₂)	mg/Nm ³	2
• OGCnom (13% O ₂)	mg/Nm ³	




CODE EURO

TOTAL PRICE		5.665,00	
Cladding	BIANCO	P06168300C	1.270,00
	BIANCO GRIGIO	P06168410C	1.270,00
	GRIGIO CERATO	P06168310C	1.270,00
	NERO OPACO	P06168160C	1.270,00
	ROSSO LAVA	P06168450C	1.270,00
	TERRA COTTA	P06168090C	1.270,00

Stove	P939	P07939000C	4.395,00
-------	------	------------	----------

Accessories on request

Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Top right-hand flue kit	P08061540C	235,00
Top coaxial flue kit	P08061770C	340,00
Wi-Fi module for Piazzetta App	N08013022C	360,00
Combustion air kit	N08010009C	65,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre
Ash vacuum cleaner	N08019040C	105,00

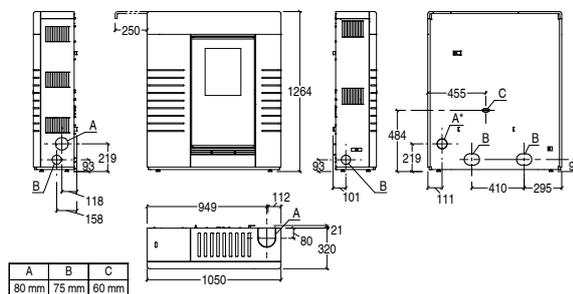

Dimensions in mm.

PELLET STOVES Premium LINE

P945 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica and steel
- Stove: steel
- Firebox: steel - cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / painted steel, detachable
- Standard flue outlet position: rear / top right
- Opzional flue: sop balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Power level: 4
- Room temperature probe for temperature mangement: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner wall-flush
- Covection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P945 C
• Type		SP360-01
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	88,9 - 90,3
• Nominal consumption (min - max)	kg/h	0,9 - 2,0
• Hopper capacity	kg	16
• Stove weight	kg	149
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	2



CODE EURO


TOTAL PRICE		5.730,00	
Cladding	BIANCO	P06238300C	1.400,00
	CANAPA	P06238350C	1.400,00
	NERO OPACO	P06238160C	1.400,00
	VERDE MIRTO	P06238250C	1.400,00

TOTAL PRICE		5.815,00	
Cladding	BIANCO GRIGIO	P06238410C	1.485,00
	ROSSO LAVA	P06238450C	1.485,00

Stove	P945 C	P07945000C	4.330,00
-------	--------	------------	----------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
LCD remote control	P08062070C	125,00
Top coaxial flue kit	N08011038C	175,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

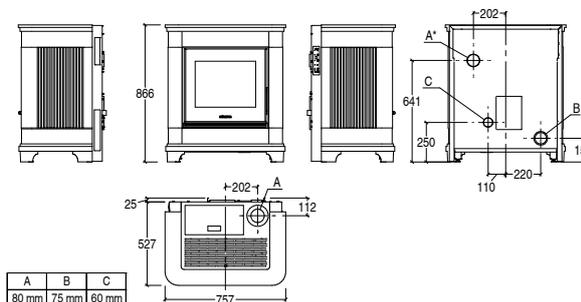

Dimensions in mm.

PELLET STOVES Premium LINE

P945 TOP STEEL



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 3 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Front ventilation: fixed air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: steel - cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / painted steel, detachable
- Standard flue outlet position: top - top balanced flue
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner wall-flush
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P945 TOP STEEL
• Type		SP360-02A
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	3,8 - 9,0
• Thermal efficiency (min - max)	%	91 - 93
• Nominal consumption (min - max)	kg/h	0,87 - 2,01
• Hopper capacity	kg	15,5
• Stove weight	kg	140
• PM _{nom} (13% O ₂)	mg/Nm ³	14
• OGC _{nom} (13% O ₂)	mg/Nm ³	3




		CODE	EURO
TOTAL PRICE INCL. FEET KIT NERO			4.840,00
Firebox with cladding	BIANCO	P07945010C	4.690,00
	CORTEN	P07945020C	4.690,00
	NERO	P07945030C	4.690,00
Essential kit	Feet kit Nero	N08019058C	150,00

		CODE	EURO
TOTAL PRICE INCL. FEET KIT WOOD FINISH			5.165,00
Firebox with cladding	BIANCO	P07945010C	4.690,00
	CORTEN	P07945020C	4.690,00
	NERO	P07945030C	4.690,00
Essential kit	Feet kit Wood finish	N08019059C	475,00

		CODE	EURO
TOTAL PRICE INCL. RISE KIT NERO			5.090,00
Firebox with cladding	BIANCO	P07945010C	4.690,00
	CORTEN	P07945020C	4.690,00
	NERO	P07945030C	4.690,00
Essential kit	Rise kit Nero	N08019060C	400,00

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
RH Display Support kit	N08013035C	65,00
Rear union for wall ducting connection	N08019042C	35,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

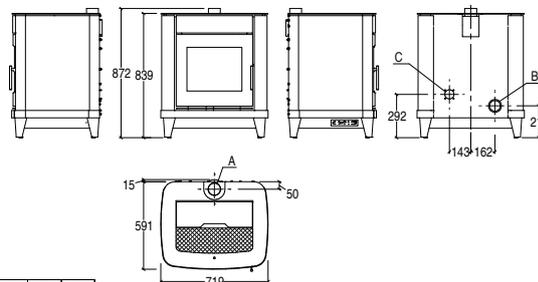

A	B	C
80 mm	75 mm	80 mm

Dimensions in mm.

Trend Plus LINE

PELLET STOVES Trend Plus Line

P112 T	106
P112 T TOP	107
P122 T	108
P122 T TOP	109

Accessories	126
-------------	-----------	-----

PELLET STOVES Trend Plus LINE

P112 T




CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	3.765,00	
Firebox with cladding	BIANCO	P07112510C 3.765,00
	CORTEN	P07112520C 3.765,00
	NERO	P07112530C 3.765,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 <small>per linear metre</small>
Ash vacuum cleaner	N08019040C	105,00

GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Removable ash drawer: yes
- Standard flue outlet position: rear
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

Rear flue outlet

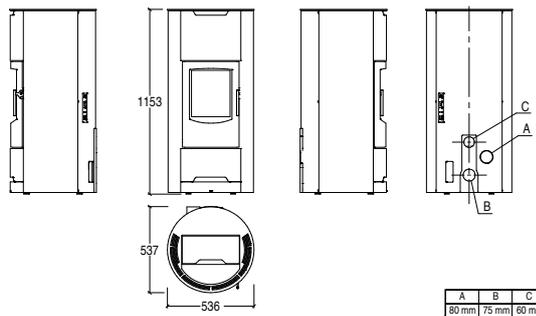

Dimensions in mm.

TECHNICAL DATA *

		REAR flue outlet
• Model		P112 T
• Type		SP450-12A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	2,8 - 6,0
• Thermal efficiency (min - max)	%	≥ 91 - ≥ 91
• Nominal consumption (min - max)	kg/h	0,63 - 1,37
• Hopper capacity	kg	18
• Stove weight	kg	112



* Product currently being certified.

PELLET STOVES Trend Plus LINE

P112 T TOP




CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE	3.895,00	
Firebox with cladding	BIANCO	P07112010C 3.895,00
	CORTEN	P07112020C 3.895,00
	NERO	P07112030C 3.895,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre
Ash vacuum cleaner	N08019040C	105,00

GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Removable ash drawer: yes
- Standard flue outlet position: top
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

Top flue outlet

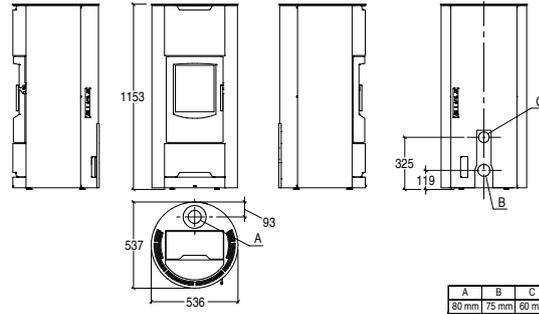

Dimensions in mm.

TECHNICAL DATA *

		TOP flue outlet
• Model		P112 T TOP
• Type		SP450-11A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	2,8 - 6,0
• Thermal efficiency (min - max)	%	≥ 92 - ≥ 92
• Nominal consumption (min - max)	kg/h	0,63 - 1,37
• Hopper capacity	kg	18
• Stove weight	kg	112



* Product currently being certified.

PELLET STOVES Trend Plus LINE

P122 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Removable ash drawer: yes
- Standard flue outlet position: rear left
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA *

• Model		
• Type		
• Room heating capacity (min - max)	m ³	
• Nominal heat output (min - max)	kW	
• Thermal efficiency (min - max)	%	
• Nominal consumption (min - max)	kg/h	
• Hopper capacity	kg	
• Stove weight	kg	


REAR flue outlet

	P122 T
	SP450-14A
	145 - 245
	3,3 - 8,5
	≥ 91 - ≥ 91
	0,75 - 1,92
	15,5
	165

CODE EURO

VERSION	- REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		3.765,00
Firebox with cladding	BIANCO	P07122510C 3.765,00
	CORTEN	P07122520C 3.765,00
	NERO	P07122530C 3.765,00
Accessories on request		
Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre
Ash vacuum cleaner	N08019040C	105,00

Rear flue outlet

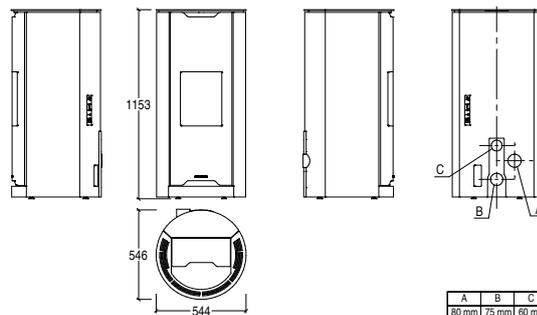

Dimensions in mm.



* Product currently being certified.

PELLET STOVES Trend Plus LINE

P122 T TOP




CODE EURO

VERSION	- TOP FLUE OUTLET - COMBUSTION AIR KIT, STANDARD		
TOTAL STOVE			3.895,00
Firebox with cladding	BIANCO	P07122010C	3.895,00
	CORTEN	P07122020C	3.895,00
	NERO	P07122030C	3.895,00
Accessories on request			
Wireless temperature probe kit		N08013024C	70,00
Rear union for wall ducting connection		N08019042C	35,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre
Ash vacuum cleaner		N08019040C	105,00

GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: AluKer®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Removable ash drawer: yes
- Standard flue outlet position: top
- LCD remote control: standard
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

Top flue outlet

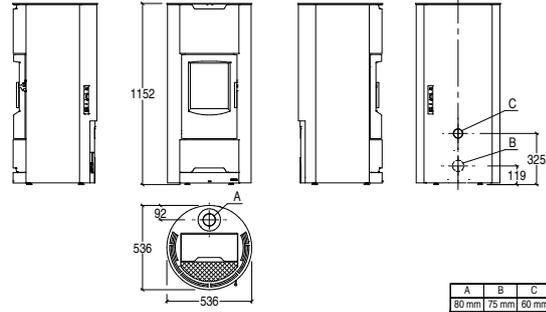

Dimensions in mm.

TECHNICAL DATA *

		TOP flue outlet
• Model		P122 T TOP
• Type		SP450-17A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	92 - 93
• Nominal consumption (min - max)	kg/h	0,77 - 1,89
• Hopper capacity	kg	15,5
• Stove weight	kg	165
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	1



* Product currently being certified.

Trend LINE

PELLET STOVES Trend Line

P110 T	112
P120 5 STELLE	113
P120	114
P120 M	115
P120 T 5 STELLE	116
P120 T	117
P121 T	118
P130 5 STELLE	119
P130	120
P130 T 5 STELLE	121
P130 T	122
P136	123
P136 Hermetic	124
P137	125
Accessories	126

PELLET STOVES TrendLINE

P110 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Removable ash drawer: yes
- Standard flue outlet position: rear
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P110 T
• Model		SP451-09A
• Type		100 - 175
• Room heating capacity (min - max)	m ³	2,7 - 6,0
• Nominal heat output (min - max)	kW	92 - 93
• Thermal efficiency (min - max)	%	0,62 - 1,37
• Nominal consumption (min - max)	kg/h	16,5
• Hopper capacity	kg	112
• Stove weight	kg	7
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	




CODE EURO

TOTAL PRICE		CODE	EURO
			3.080,00
Firebox with cladding	BIANCO	P07110510C	3.080,00
	CORTEN	P07110520C	3.080,00
	NERO	P07110530C	3.080,00

Accessories on request

Easy remote control kit	N08013032C	80,00
Nero hole closing kit for right-hand display	N08013027C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre
Ash vacuum cleaner	N08019040C	105,00

Technical drawing version with rear flue outlet, standard

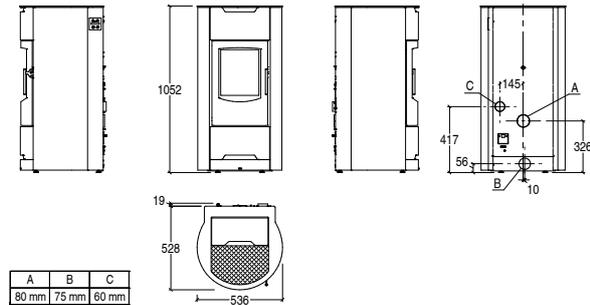

Dimensions in mm.

PELLET STOVES TrendLINE

P120



5 STELLE

GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes


TECHNICAL DATA

• Model		P120
• Type		SP400-07A
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	91 - 91
• Nominal consumption (min - max)	kg/h	0,76 - 1,92
• Hopper capacity	kg	18
• Stove weight	kg	105
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	1




		CODE	EURO
TOTAL PRICE			3.300,00
Firebox with cladding	BIANCO	P07120010C	3.300,00
	NERO	P07120030C	3.300,00
	RUBINO	P07120020C	3.300,00
Accessories on request			
Easy remote control kit		N08013032C	80,00
Bianco hole closing kit for right-hand display		N08013025C	35,00
Rubino hole closing kit for right-hand display		N08013026C	35,00
Nero hole closing kit for right-hand display		N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Top flue kit		N08011025C	245,00
Rear union for wall ducting connection		N08019042C	35,00
Humidifier		N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 <small>per linear metre</small>

Technical drawing version with rear flue outlet, standard

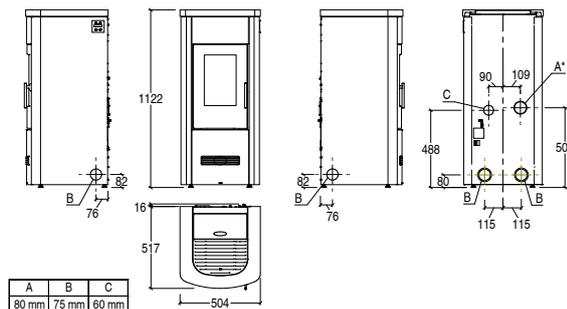

Dimensions in mm.

Technical drawing version with top flue outlet, optional

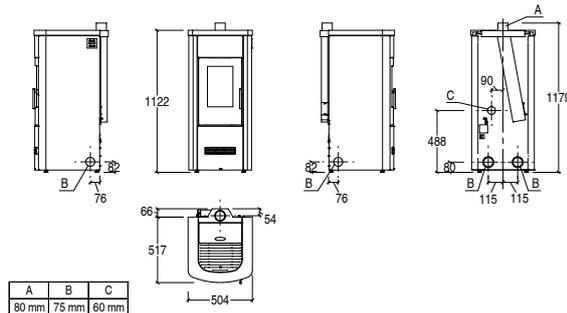

Dimensions in mm.

P120



GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top - top coaxial - LH side
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes


TECHNICAL DATA

• Model		P120
• Type		SP400-05
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,4 - 90,6
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	18
• Stove weight	kg	105
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	1




		CODE	EURO
TOTAL PRICE			3.165,00
Firebox with cladding	BIANCO	P07120510C	3.165,00
	NERO	P07120530C	3.165,00
	RUBINO	P07120520C	3.165,00
Accessories on request			
Easy remote control kit		N08013032C	80,00
Bianco hole closing kit for right-hand display		N08013025C	35,00
Rubino hole closing kit for right-hand display		N08013026C	35,00
Nero hole closing kit for right-hand display		N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Side left-hand flue kit		N08011027C	90,00
Top flue kit		N08011025C	245,00
Rear union for wall ducting connection		N08019042C	35,00
Top coaxial flue kit Ø 80/130		N08011026C	360,00
Humidifier		N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00
			<small>per linear metre</small>

Technical drawing version with rear flue outlet, standard

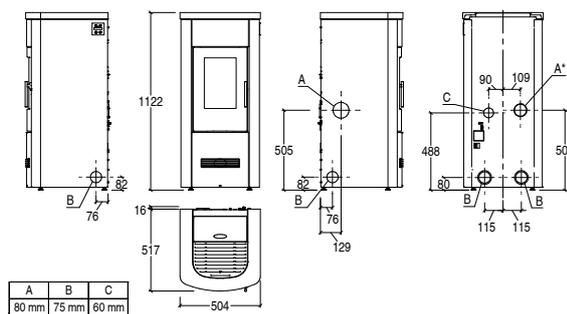


Dimensions in mm.

Technical drawing version with top flue outlet, optional

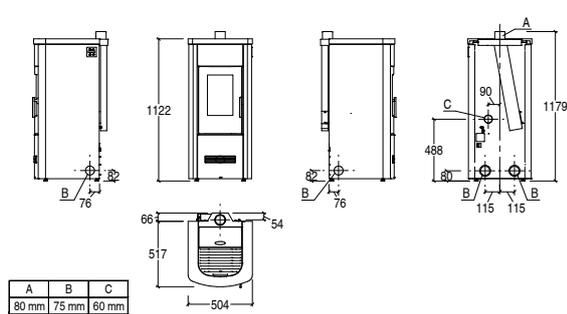

Dimensions in mm.

Technical drawing version with coaxial flue outlet, optional

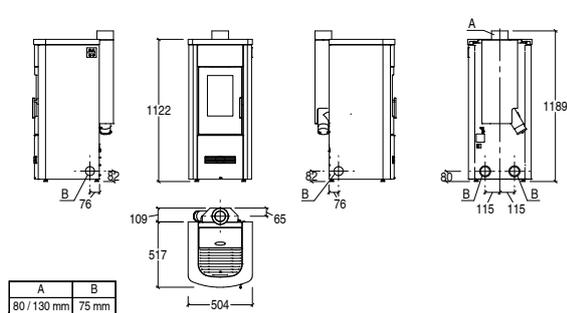

Dimensions in mm.

P120 M



GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: steel - cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top - top coaxial - LH side
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P120 M
• Type		SP400-05
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,4 - 90,6
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	18
• Stove weight	kg	110
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO


TOTAL PRICE			3.245,00
Firebox with cladding	BIANCO	P07120810C	3.245,00
	NERO	P07120830C	3.245,00
	RUBINO	P07120820C	3.245,00

Accessories on request

Easy remote control kit	N08013032C	80,00
Nero hole closing kit for right-hand display	N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Side left-hand flue kit	N08011027C	90,00
Top flue kit	N08011025C	245,00
Rear union for wall ducting connection	N08019042C	35,00
Top coaxial flue kit Ø 80/130	N08011026C	360,00
Humidifier	N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00


per linear metre

Technical drawing version with rear flue outlet, standard

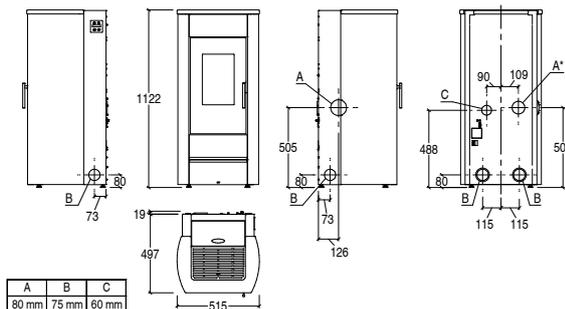


Dimensions in mm.

Technical drawing version with top flue outlet, optional

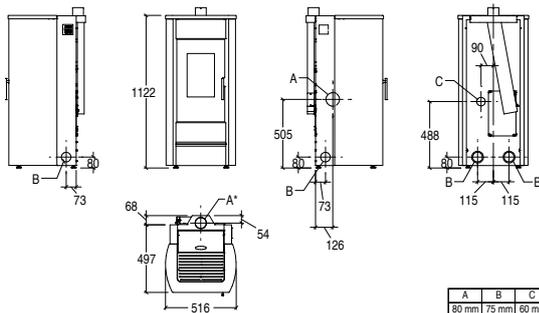

Dimensions in mm.

Technical drawing version with coaxial flue outlet, optional

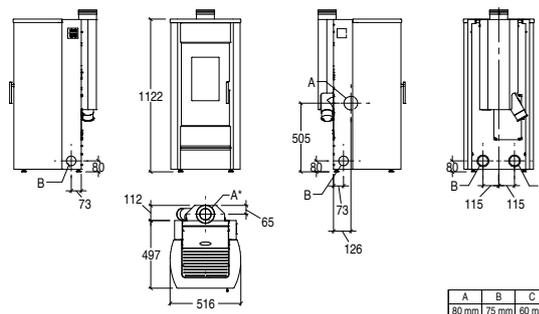

Dimensions in mm.

PELLET STOVES TrendLINE

P120 T



5 STELLE

GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes


TECHNICAL DATA

		P120 T
• Model		SP400-07A
• Type		145 - 245
• Room heating capacity (min - max)	m ³	3,4 - 8,5
• Nominal heat output (min - max)	kW	91,4 - 91,5
• Thermal efficiency (min - max)	%	0,76 - 1,92
• Nominal consumption (min - max)	kg/h	18
• Hopper capacity	kg	110
• Stove weight	kg	9
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	




		CODE	EURO
TOTAL PRICE			3.375,00
Firebox with cladding	BIANCO	P07120110C	3.375,00
	NERO	P07120130C	3.375,00
	RUBINO	P07120120C	3.375,00
Accessories on request			
Easy remote control kit		N08013032C	80,00
Bianco hole closing kit for right-hand display		N08013025C	35,00
Rubino hole closing kit for right-hand display		N08013026C	35,00
Nero hole closing kit for right-hand display		N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Top flue kit		N08011025C	245,00
Rear union for wall ducting connection		N08019042C	35,00
Humidifier		N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00

Technical drawing version with rear flue outlet, standard

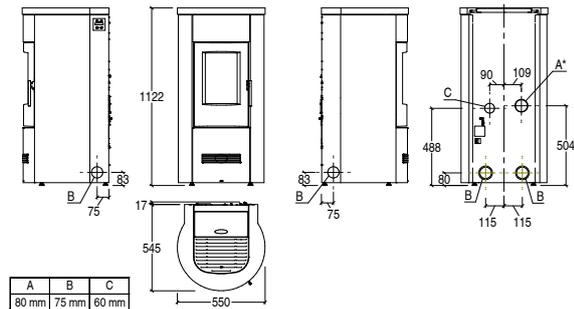

Dimensions in mm.

Technical drawing version with top flue outlet, optional

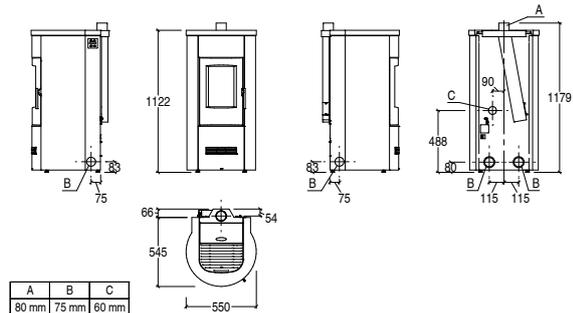

Dimensions in mm.

PELLET STOVES TrendLINE

P120 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top - top coaxial - LH side
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes


TECHNICAL DATA

• Model		P120 T
• Type		SP400-05
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output (min - max)	kW	3,4 - 8,5
• Thermal efficiency (min - max)	%	89,4 - 90,6
• Nominal consumption (min - max)	kg/h	0,7 - 1,9
• Hopper capacity	kg	18
• Stove weight	kg	110
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	1




		CODE	EURO
TOTAL PRICE			3.240,00
Firebox with cladding	BIANCO	P07120710C	3.240,00
	NERO	P07120730C	3.240,00
	RUBINO	P07120720C	3.240,00
Accessories on request			
Easy remote control kit		N08013032C	80,00
Bianco hole closing kit for right-hand display		N08013025C	35,00
Rubino hole closing kit for right-hand display		N08013026C	35,00
Nero hole closing kit for right-hand display		N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Side left-hand flue kit		N08011027C	90,00
Top flue kit		N08011025C	245,00
Rear union for wall ducting connection		N08019042C	35,00
Top coaxial flue kit Ø 80/130		N08011026C	360,00
Humidifier		N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00
			<small>per linear metre</small>

Technical drawing version with rear flue outlet, standard

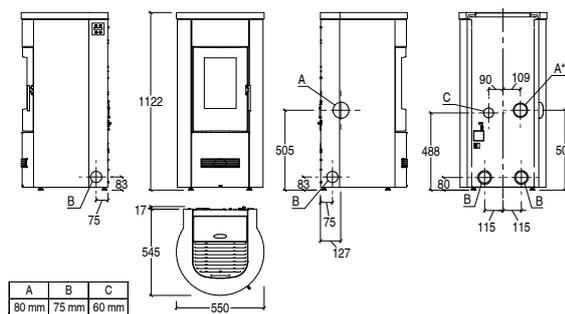


Dimensions in mm.

Technical drawing version with top flue outlet, optional

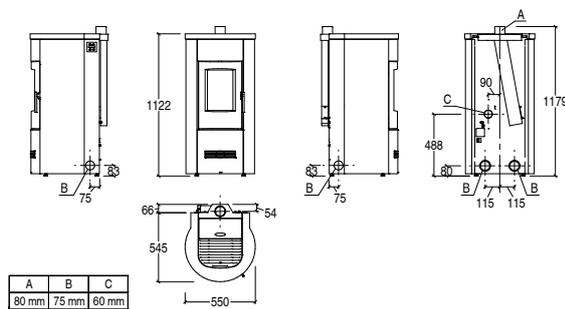

Dimensions in mm.

Technical drawing version with coaxial flue outlet, optional

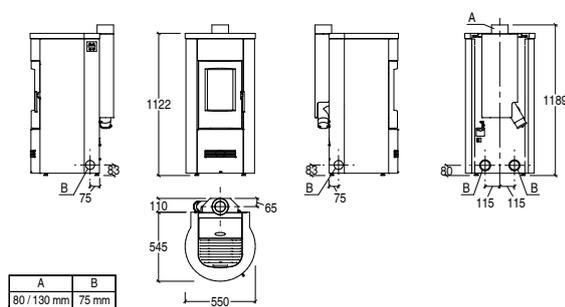

Dimensions in mm.

PELLET STOVES TrendLINE

P121 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System with lower front warm air outlet, ductable / Sweet Air Mode, upper front ventilation system
- Lower front ventilation: fixed air vent
- Upper front ventilation: fixed slit
- Natural Mode: all fans turned off
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / steel
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Removable ash drawer: yes
- Standard flue outlet position: rear
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P121 T
• Model		SP451-10A
• Type		145 - 245
• Room heating capacity (min - max)	m ³	3,5 - 8,5
• Nominal heat output (min - max)	kW	91 - 93
• Thermal efficiency (min - max)	%	0,79 - 1,93
• Nominal consumption (min - max)	kg/h	16,5
• Hopper capacity	kg	98
• Stove weight	kg	10
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	




CODE EURO

TOTAL PRICE		CODE	EURO
			3.080,00
Firebox with cladding	BIANCO	P07121510C	3.080,00
	CORTEN	P07121520C	3.080,00
	NERO	P07121530C	3.080,00

Accessories on request

Easy remote control kit	N08013032C	80,00
Nero hole closing kit for right-hand display	N08013027C	35,00
Rear union for wall ducting connection	N08019042C	35,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre
Ash vacuum cleaner	N08019040C	105,00

Technical drawing version with rear flue outlet, standard

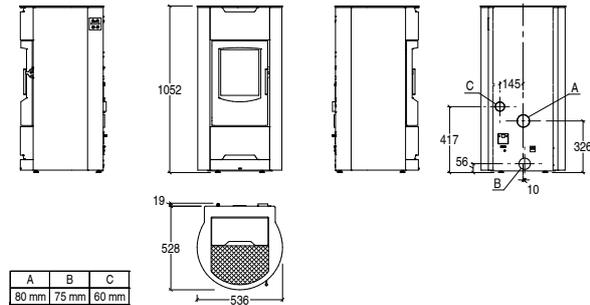

Dimensions in mm.

P130

5 STELLE



GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, manually or automatically controlled. Ductable hot air
- Trend Power: 3 speed levels, manually controlled
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

• Model		P130
• Type		SP410-07A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	3,9 - 11,0
• Thermal efficiency (min - max)	%	90,7 - 91,5
• Nominal consumption (min - max)	kg/h	0,88 - 2,48
• Hopper capacity	kg	27
• Stove weight	kg	138
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	1



CODE EURO


TOTAL PRICE			3.715,00
Firebox with cladding	BIANCO	P07130010C	3.715,00
	NERO	P07130030C	3.715,00
	RUBINO	P07130020C	3.715,00

Accessories on request

Easy remote control kit	N08013032C	80,00
Bianco hole closing kit for right-hand display	N08013025C	35,00
Rubino hole closing kit for right-hand display	N08013026C	35,00
Nero hole closing kit for right-hand display	N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Top flue kit	N08011028C	245,00
Rear union for wall ducting connection	N08019042C	35,00
Humidifier	N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00


per linear metre

Technical drawing version with rear flue outlet, standard

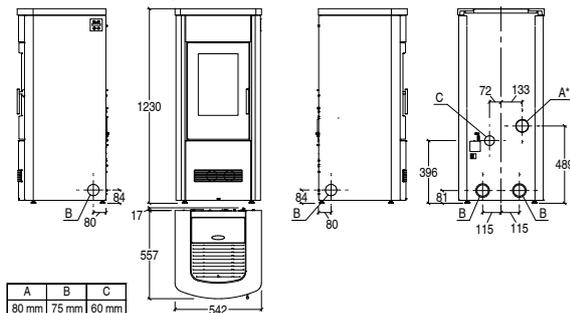

Dimensions in mm.

Technical drawing version with top flue outlet, optional

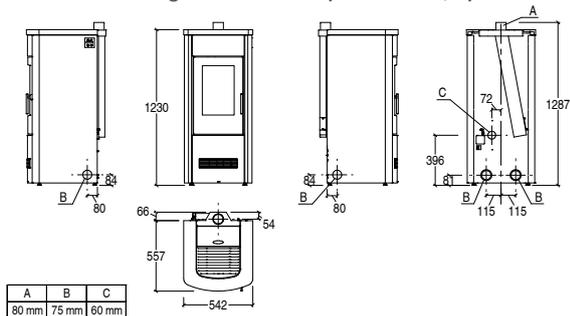

Dimensions in mm.

P130



GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, manually or automatically controlled. Ductable hot air
- Trend Power: 3 speed levels, manually controlled
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top - top coaxial - LH side
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes


TECHNICAL DATA

• Model		P130
• Type		SP410-05
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	4,0 - 11,0
• Thermal efficiency (min - max)	%	90,0 - 91,0
• Nominal consumption (min - max)	kg/h	0,9 - 2,5
• Hopper capacity	kg	27
• Stove weight	kg	138
• PMnom (13% O ₂)	mg/Nm ³	11
• OGCnom (13% O ₂)	mg/Nm ³	1




	CODE	EURO
TOTAL PRICE		3.580,00
Firebox with cladding	BIANCO	P07130510C 3.580,00
	NERO	P07130530C 3.580,00
	RUBINO	P07130520C 3.580,00
Accessories on request		
Easy remote control kit	N08013032C	80,00
Bianco hole closing kit for right-hand display	N08013025C	35,00
Rubino hole closing kit for right-hand display	N08013026C	35,00
Nero hole closing kit for right-hand display	N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Side left-hand flue kit	N08011030C	90,00
Top flue kit	N08011028C	245,00
Rear union for wall ducting connection	N08019042C	35,00
Top coaxial flue kit Ø 80/130	N08011029C	360,00
Humidifier	N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 <small>per linear metre</small>

Technical drawing version with rear flue outlet, standard

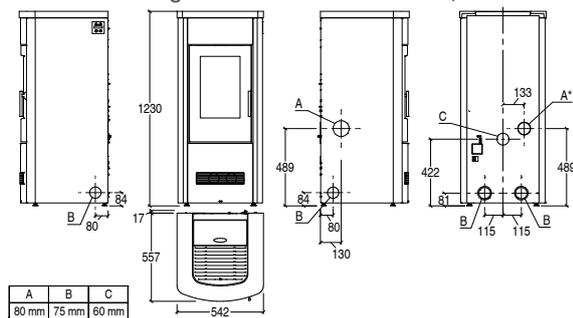


Dimensions in mm.

Technical drawing version with top flue outlet, optional

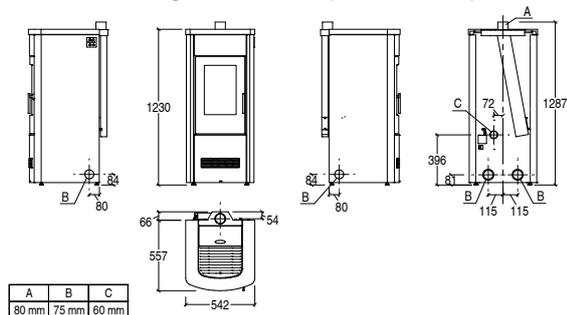

Dimensions in mm.

Technical drawing version with coaxial flue outlet, optional

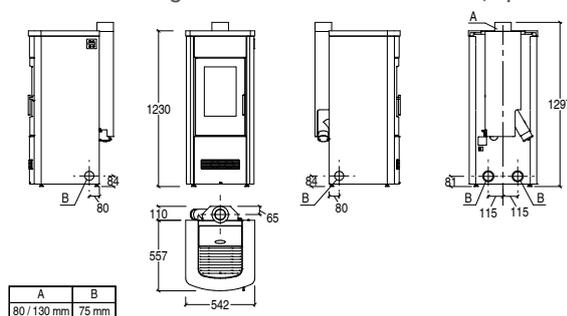

Dimensions in mm.

PELLET STOVES TrendLINE

P130 T



5 STELLE

GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, manually or automatically controlled. Ductable hot air
- Trend Power: 3 speed levels, manually controlled
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P130 T
• Model		SP410-07A
• Type		185 - 315
• Room heating capacity (min - max)	m ³	3,9 - 11,0
• Nominal heat output (min - max)	kW	90,7 - 91,5
• Thermal efficiency (min - max)	%	0,88 - 2,48
• Nominal consumption (min - max)	kg/h	27
• Hopper capacity	kg	146
• Stove weight	kg	10
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	



CODE EURO


TOTAL PRICE		CODE	EURO
			3.735,00
Firebox with cladding	BIANCO	P07130110C	3.735,00
	NERO	P07130130C	3.735,00
	RUBINO	P07130120C	3.735,00

Accessories on request

Easy remote control kit	N08013032C	80,00
Bianco hole closing kit for right-hand display	N08013025C	35,00
Rubino hole closing kit for right-hand display	N08013026C	35,00
Nero hole closing kit for right-hand display	N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model	P08062240C	35,00
Top flue kit	N08011028C	245,00
Rear union for wall ducting connection	N08019042C	35,00
Humidifier	N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00


per linear metre

Technical drawing version with rear flue outlet, standard

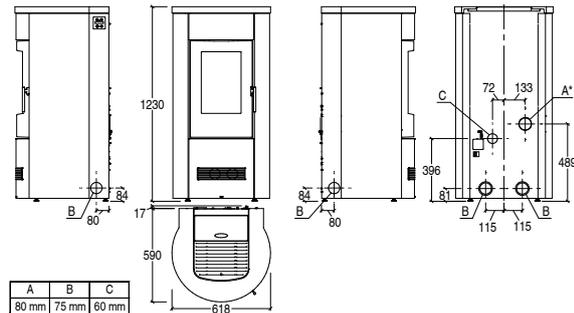

Dimensions in mm.

Technical drawing version with top flue outlet, optional

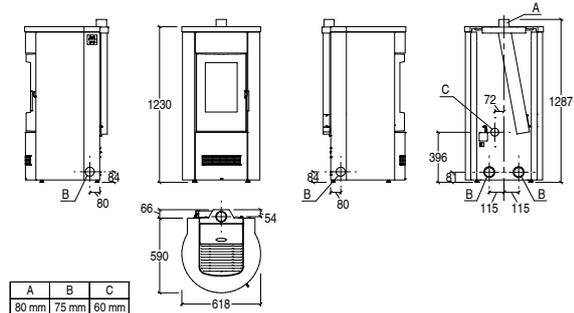

Dimensions in mm.

P130 T



GENERAL CHARACTERISTICS

- Heating: Multifuoco System®, manually or automatically controlled. Ductable hot air
- Trend Power: 3 speed levels, manually controlled
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with Nero finish
- Standard flue outlet position: rear left
- Optional flue outlet: top - top coaxial - LH side
- EASY Remote control with LCD display: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes


TECHNICAL DATA

		P130 T
• Model		SP410-05
• Type		185 - 315
• Room heating capacity (min - max)	m ³	4,0 - 11,0
• Nominal heat output (min - max)	kW	90,0 - 91,0
• Thermal efficiency (min - max)	%	0,9 - 2,5
• Nominal consumption (min - max)	kg/h	27
• Hopper capacity	kg	146
• Stove weight	kg	11
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	




		CODE	EURO
TOTAL PRICE			3.600,00
Firebox with cladding	BIANCO	P07130710C	3.600,00
	NERO	P07130730C	3.600,00
	RUBINO	P07130720C	3.600,00
Accessories on request			
Easy remote control kit		N08013032C	80,00
Bianco hole closing kit for right-hand display		N08013025C	35,00
Rubino hole closing kit for right-hand display		N08013026C	35,00
Nero hole closing kit for right-hand display		N08013027C	35,00
Fixed air vent RH, LH, rear, depending on the model		P08062240C	35,00
Side left-hand flue kit		N08011030C	90,00
Top flue kit		N08011028C	245,00
Rear union for wall ducting connection		N08019042C	35,00
Top coaxial flue kit Ø 80/130		N08011029C	360,00
Humidifier		N08019020C	25,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

Technical drawing version with rear flue outlet, standard

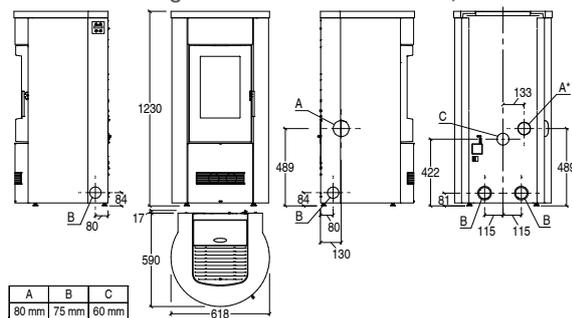


Dimensions in mm.

Technical drawing version with top flue outlet, optional

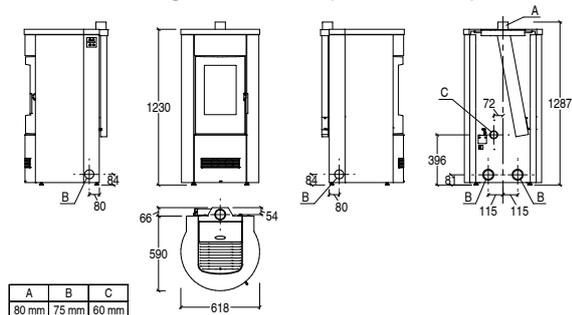

Dimensions in mm.

Technical drawing version with coaxial flue outlet, optional

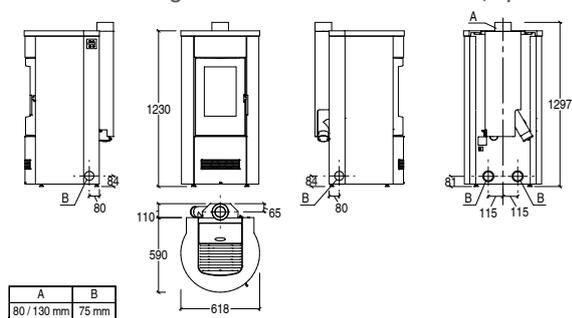

Dimensions in mm.

P136

GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with nickel-plated finish
- Standard flue outlet position: rear right - right side
- Optional flue outlet: top - top coaxial
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with display and digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Remote control: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P136
• Model		SP121-02
• Type		135 - 230
• Room heating capacity (min - max)	m ³	3,9 - 8,0
• Nominal heat output (min - max)	kW	89,6 - 88,6
• Thermal efficiency (min - max)	%	0,91 - 1,89
• Nominal consumption (min - max)	kg/h	17
• Hopper capacity	kg	120
• Stove weight	kg	10
• PMnom (13% O ₂)	mg/Nm ³	2
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			3.675,00
Firebox with cladding	BIANCO	P07136910C	3.675,00
	NERO OPACO	P07136930C	3.675,00
	RUBINO	P07136920C	3.675,00
Accessories on request			
Side warm air vent kit		P08016760C	30,00
Front air vent with diverter		P08061550C	115,00
Top flue kit		N08011049C	110,00
Top coaxial flue kit Ø 80/130		N08011052C	260,00
Remote control		N08019021C	65,00
Humidifier		N08019020C	25,00
Wi-Fi module for Piazzetta App		N08013022C	360,00
Flexible pipe Ø 6 cm for combustion air		N08011017	20,00 per linear metre

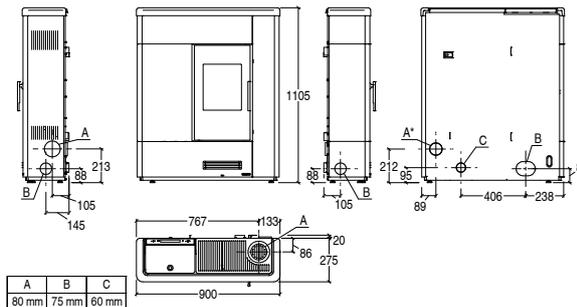

Dimensions in mm.

P136 Hermetic

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, automatically controlled. Ductable hot air
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent RH-LH optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with nickel-plated finish
- Standard flue outlet position: rear
- Optional flue outlet: top - top coaxial - RH side
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with display and digital controls: yes
- Power level: 4
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Outside air kit: standard
- Ash vacuum cleaner: standard
- Remote control: optional
- Installation: wall - corner
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		P136-S
• Model		SP124-02
• Type		135 - 230
• Room heating capacity (min - max)	m ³	3,6 - 8,0
• Nominal heat output (min - max)	kW	87,3 - 87,3
• Thermal efficiency (min - max)	%	0,8 - 1,8
• Nominal consumption (min - max)	kg/h	17
• Hopper capacity	kg	115
• Stove weight	kg	13
• PMnom (13% O ₂)	mg/Nm ³	2
• OGCnom (13% O ₂)	mg/Nm ³	




CODE EURO

TOTAL PRICE			3.935,00
Firebox with cladding	BIANCO	P07136610C	3.935,00
	NERO OPACO	P07136630C	3.935,00
	RUBINO	P07136620C	3.935,00

Accessories on request

Side warm air vent kit	P08016760C	30,00
Front air vent with diverter	P08061550C	115,00
Right-hand side flue kit	N08011047C	25,00
Top flue kit	N08011049C	110,00
Top coaxial flue kit Ø 80/130	N08011048C	260,00
Remote control	N08019021C	65,00
Humidifier	N08019020C	25,00
Wi-Fi module for Piazzetta App	N08013022C	360,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

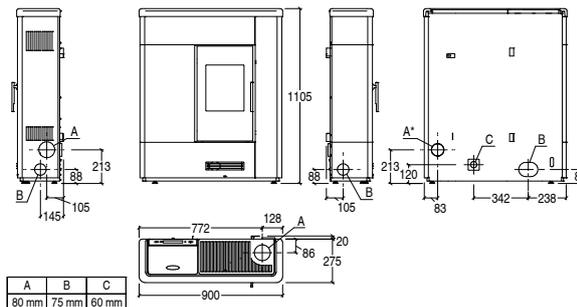

Dimensions in mm.

P137



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 5 speed levels, automatically controlled. Ductable hot air
- Trend Power: 3 speed levels, manually controlled
- Front ventilation: fixed air vent
- Side ventilation: fixed air vent optional
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: steel / majolica and steel
- Stove: steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / steel
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel with nickel-plated finish
- Removable ash drawer: yes
- Standard flue outlet position: rear right - right side
- Optional flue outlet: top right
- WiFi module- Bluetooth® for App MyPIAZZETTA: optional
- Control panel with display and digital controls: yes
- Power level: 5
- Room temperature probe for temperature mangement: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: optional
- Pellet level indicator: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: optional
- Remote control: opzionale
- Optional side air vents: right and left
- Optional directional front air vents: yes
- Installation: wall - corner wall-flush


TECHNICAL DATA

• Model		P137
• Type		SP355-01
• Room heating capacity (min - max)	m ³	175 - 300
• Nominal heat output (min - max)	kW	4,1 - 10,5
• Thermal efficiency (min - max)	%	88,5 - 90,3
• Nominal consumption (min - max)	kg/h	0,9 - 2,4
• Hopper capacity	kg	25
• Stove weight	kg	160
• PMnom (13% O ₂)	mg/Nm ³	20
• OGCnom (13% O ₂)	mg/Nm ³	2



CODE EURO

TOTAL PRICE		3.935,00
Firebox with cladding	BIANCO	P07137510C
	NERO OPACO	P07137530C
	RUBINO	P07137520C
Accessories on request		
Side warm air vent kit	P08016760C	30,00
Front air vent with diverter	P08061560C	115,00
Top flue kit	P08061530C	235,00
Remote control	N08019021C	65,00
Humidifier	N08019020C	25,00
Top coaxial flue kit	P08061680C	340,00
Wi-Fi module for Piazzetta App	N08013022C	360,00
Combustion air kit	N08010009C	65,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre
Ash vacuum cleaner	N08019040C	105,00

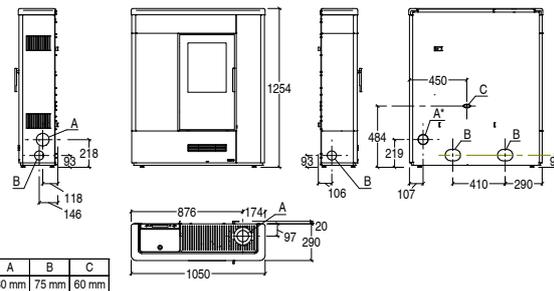

Dimensions in mm.

PELLET STOVES - HERMETIC - WITH OVEN

Accessories

PELLET LOADING KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
	All models P220-P230	P08062180C	55,00
	All models P220-P230 5 STELLE	P08063150C	55,00
Pellet loading kit for PREMIUM series	All models P920	P08062760C	115,00
	All models P930	P08062770C	115,00

ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO	
	Rear union for wall ducting connection PREMIUM PLUS Line (All models)		N08019042C	35,00	
	Rear union for wall ducting connection PREMIUM Line (excluding P934, P939)				
	Rear union for wall ducting connection for the TREND Line (excluding P137)				
	Rear union for wall ducting connection for the TREND PLUS LINE				
	Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
	Y connector for pellet stoves P136 - P136 Hermetic - P137 - P939 - P110 - P121 T	Ø 7,5	10	N08011020	40,00
	Y connector for pellet stoves ^[2]	Ø 7,5	10	N08011016	28,00
	Y connector for pellet stoves and for branching the hot air ducts ^[3]	Ø 7,5	10	N08011006	30,00
	90° aluminium bend	Ø 7,5	10	N08011007	30,00
	Pipe clamp	Ø 7,5	50	N08011008	5,00
	Connector sleeve	Ø 7,5	50	N08011009	10,00

[1] Available in 30 meter roll, minimum order quantity: 1 meter.

[2] For connecting the Multifuco System® fan of pellet stoves to the flex pipe for ducting hot air.

[3] Used on pellet stoves for branching the hot air duct.

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO	
	L 25 x H 12 Ø 7,5	10	N08011001	60,00	
	L 25 x H 11 Ø 7,5	6	N08011002	85,00	
	Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
	Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
	Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
	Wall air vent, blasted steel	L 43 x H 5 Ø 7,5	1	NI08012410-0	270,00
	Wall air vent, black enamelled steel	L 43 x H 5 Ø 7,5	1	NI08014200-0	225,00
	Wall air vent, white enamelled steel	L 43 x H 5 Ø 7,5	1	NI08014410-0	225,00
	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00	
	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00	

PELLET STOVES - HERMETIC - WITH OVEN

Accessories

REMOTE MANAGEMENT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Wi-Fi module for control through Piazzetta app inclusive of serial cable and power supply ^[1]	P943 Hermetic - P943 M Hermetic	N08013012C	315,00
	P934 - P939 - P136 Hermetic - P137	N08013022C	360,00

[1] Compatible with all models produced or updated starting from 2013.

WIRELESS TEMPERATURE PROBE KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Wireless temperature probe kit	Series PREMIUM LINE (excluding P934, P939) Series TREND PLUS LINE	N08013024C	70,00


COMBUSTION AIR KIT AND ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Combustion air kit	P939 P137	N08010009C	65,00
 Combustion air kit	P934	N08010029C	105,00
 Flexible pipe Ø 6 cm for combustion air	All models	N08011017	20,00 per linear metre
 Aeration grille with spring for wall hole Ø 6,0-7,5 cm	All models	N08010014	5,00

ASH VACUUM CLEANER

ITEM	COMPATIBLE MODELS	CODE	EURO
 Ash vacuum cleaner	P934 - P939 - P137 Series TREND PLUS LINE	N08019040C	105,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
 Rectangular steel floor plate	All models	100x120	P08024300C	335,00
 Round edged steel floor plate	All models	100x120	P08024310C	335,00

PELLET STOVES - HERMETIC - WITH OVEN

Accessories

OPTIONAL FLUE OUTLET KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
	series P220 TOP	P08062050C	360,00
	series P920 TOP	N08010040C	360,00
Top coaxial flue kit Ø 80/130	series P230 TOP	P08062060C	360,00
	series P930 TOP	N08010041C	345,00
Top coaxial flue kit Ø 80/130	P240	P08062780C	210,00
Top coaxial flue kit Ø 80/130	Series P120	N08011026C	360,00
Top coaxial flue kit Ø 80/130	Series P130	N08011029C	360,00
	series P220-P230 TOP	P08062170C	120,00
	series P920 TOP	P08062350C	115,00
	series P930 TOP	P08062360C	115,00
Top flue kit	P137	P08061530C	235,00
Top flue kit	Series P120	N08011025C	245,00
Top flue kit	Series P130	N08011028C	245,00
Top flue kit	P136 Hermetic	N08011049C	110,00
Top coaxial flue kit Ø 80/130	P136 Hermetic	N08011048C	260,00
Top coaxial flue kit Ø 80/130	P137	P08061680C	340,00
Top coaxial flue kit Ø 80/130	LINE - P945 C	N08011038C	175,00
	P939	P08061540C	235,00
	Series P120	N08011027C	90,00
	Series P130	N08011030C	90,00
	P136 Hermetic	N08011047C	25,00

HUMIDIFIER

ITEM	COMPATIBLE MODELS	CODE	EURO
Humidifier for TREND series	All models	N08019020C	25,00

REMOTE CONTROL

ITEM	COMPATIBLE MODELS	CODE	EURO
	Series PREMIUM PLUS LINE: all models Series PREMIUM LINE: all models excluding P934, P939	P08062070C	125,00
	P136 Hermetic - P137	N08019021C	65,00
	Series TREND LINE (excluding P136 Hermetic, P137)	N08013032C	80,00

HOLE CLOSING KIT FOR DISPLAY

ITEM	COMPATIBLE MODELS	CODE	EURO
Bianco hole closing kit for right-hand display	P120 - P120 T P130 - P130 T	N08013025C	35,00
Rubino hole closing kit for right-hand display	P120 - P120 T P130 - P130 T	N08013026C	35,00
Nero hole closing kit for right-hand display	P110 T - P120 - P120 M P120 T - P121 T P130 - P130 T	N08013027C	35,00

PELLET STOVES - HERMETIC - WITH OVEN

Accessories


PIPES - BENDS - CONNECTORS FOR PELLET APPLIANCES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
 Pipe with inspection	L 25	80	P08025890	45,00
 Pipe	L 25	80	P08025370	40,00
	L 50	80	P08025380	66,00
	L 100	80	P08025390	99,00
 Bend 90° with inspection	L 16 x H 16	80	P08025910	99,00
 Bend 90°	L 16 x H 16	80	P08025400	92,00
 Bend 45°	L 12 x H 12	80	P08025410	66,00
 T-fitting w/RH and LH side inspection port	L 14 x H 18	80	P08027250	120,00
 T-fitting w/support ^[1]	L 12 x H 17-22	80	P08027230	150,00
 T-fitting w/support ^[1]	L 12 x H 17-22	80-100	P08027240	150,00
 T-fitting w/inspection port	L 18 x H 14	80	P08025430	105,00
 Flue ring	-	80	P08025490	35,00
 Wall connector	-	80	P08025550	35,00

[1] Not compatible with LINE.

AIR VENTS

ITEM	COMPATIBLE MODELS	CODE	EURO
 Side warm air vent kit	P136 Hermetic - P137	P08016760C	30,00
 Fixed air vent RH, LH, rear, depending on the model	P220 M - P220 M TOP - P220 T - P220 T TOP P220 T FR/G - P220 T FR/G TOP P230 M - P230 M TOP - P230 T - P230 T TOP P230 T FR/G - P230 T FR/G TOP - P240 Series P910 T FR/G P920 C - P920 C TOP - P920 K - P920 K TOP P920 M - P920 M TOP - P920 T - P920 T TOP Series P921 T FR/G P930 C - P930 C TOP - P930 K - P930 K TOP P930 M - P930 M TOP - P930 T - P930 T TOP P934 - P939 - P120 - P120 M P120 T - P130 - P130 T	P08062240C	35,00
 Front air vent with diverter	P137	P08061560C	115,00

PELLET STUBOTTO

BERNA pellet	132
BRUNICO	133
CANAZEI	134
ORTISEI	135
STUBOTTO C	136

Accessories	137
-----------------------	-----

PELLET STUBOTTO

BERNA pellet



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: yes
- Front ventilation: directional air vent
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / steel
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / detachable
- Ceramic glass: resistant up to 750°C
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		BERNA
• Model		SP480-02
• Type		235 - 400
• Room heating capacity (min - max)	m ³	4,4 - 14,0
• Nominal heat output (min - max)	kW	89,1 - 91,3
• Thermal efficiency (min - max)	%	1,01 - 3,13
• Nominal consumption (min - max)	kg/h	51
• Hopper capacity	kg	250
• Stove weight	kg	15
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			7.890,00
Cladding	BIANCO	P06252300C	2.175,00
	NERO OPACO	P06252160C	2.175,00
	ROSSO LAVA	P06252450C	2.175,00
	TERRA COTTA	P06252090C	2.175,00
Stove	BERNA	P07974300C	5.715,00
Accessories on request			
	Wireless temperature probe kit	N08013024C	70,00
	LCD remote control	P08062070C	125,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

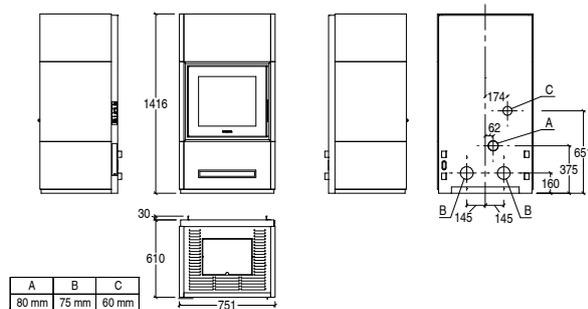

Dimensions in mm.

PELLET STUBOTTO

BRUNICO



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		BRUNICO
• Model		SP410-13
• Type		185 - 315
• Room heating capacity (min - max)	m ³	3,9 - 11,0
• Nominal heat output (min - max)	kW	89,6 - 91,6
• Thermal efficiency (min - max)	%	0,90 - 2,49
• Nominal consumption (min - max)	kg/h	40
• Hopper capacity	kg	257
• Stove weight	kg	15
• PMnom (13% O ₂)	mg/Nm ³	4
• OGCnom (13% O ₂)	mg/Nm ³	

		CODE	EURO
TOTAL PRICE			7.330,00
Cladding	Dome, sides and surrounds Bianco	P15044300C	2.340,00
	Dome Bianco Antico, sides and surrounds Blu Verdemare	P15044113C	2.340,00
	Dome Bianco Antico, sides and surrounds Canapa	P15044353C	2.340,00
	Dome Bianco Antico, sides and surrounds Terra Bruna	P15044323C	2.340,00
	Dome Bianco Antico, sides and surrounds Verde Mirto	P15044253C	2.340,00


TOTAL PRICE			7.730,00
Cladding	Dome and sides Bianco Antico, Surrounds, side and dome decorations Blu Verdemare	P15044112C	2.740,00
	Dome and sides Bianco Antico, Surrounds, side and dome decorations Canapa	P15044352C	2.740,00
	Dome and sides Bianco Antico, Surrounds, side and dome decorations Terra Bruna	P15044322C	2.740,00
	Dome and sides Bianco Antico, Surrounds, side and dome decorations Verde Mirto	P15044252C	2.740,00

Stove	SP410-13	P07041500C	4.785,00
-------	----------	------------	----------

Essential kit	Top kit element	P08063000C	205,00
---------------	-----------------	------------	--------

Accessories on request

Wireless temperature probe kit	N08013024C	70,00
Rear union for wall ducting connection	N08019042C	35,00
LCD remote control	P08062070C	125,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

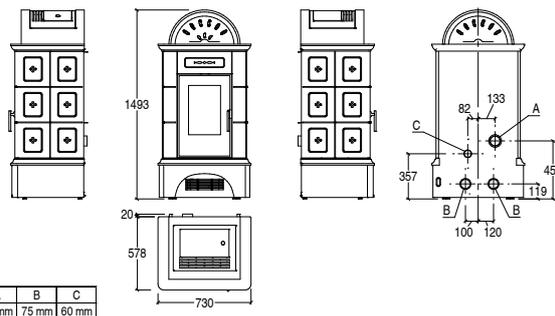

Dimensions in mm.



PELLET STUBOTTO

CANAZEI



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		CANAZEI
• Model		SP410-13
• Type		185 - 315
• Room heating capacity (min - max)	m ³	3,9 - 11,0
• Nominal heat output (min - max)	kW	89,6 - 91,6
• Thermal efficiency (min - max)	%	0,90 - 2,49
• Nominal consumption (min - max)	kg/h	43
• Hopper capacity	kg	267
• Stove weight	kg	15
• PMnom (13% O ₂)	mg/Nm ³	4
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			7.580,00
Cladding	Dome, sides and surrounds Bianco	P15045300C	2.590,00
	Dome, sides and surrounds Blu Verdemare	P15045110C	2.590,00
	Dome, sides and surrounds Canapa	P15045350C	2.590,00
	Dome, sides and surrounds Terra Bruna	P15045320C	2.590,00
	Dome, sides and surrounds Verde Mirto	P15045250C	2.590,00
TOTAL PRICE			7.980,00
Cladding	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verdemare	P15045114C	2.990,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Canapa	P15045354C	2.990,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Terra Bruna	P15045324C	2.990,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verde Mirto	P15045254C	2.990,00
	Stove	SP410-13	P07041500C
Essential kit	Top kit element	P08063010C	205,00
Accessories on request			
	Wireless temperature probe kit	N08013024C	70,00
	Rear union for wall ducting connection	N08019042C	35,00
	LCD remote control	P08062070C	125,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

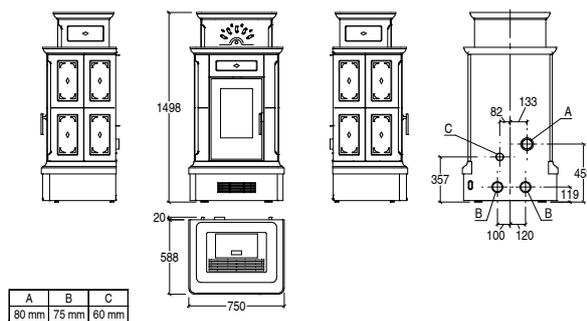

Dimensions in mm.

PELLET STUBOTTO

ORTISEI



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: 4 speed levels, manually or automatically controlled
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		ORTISEI
• Model		SP410-13
• Type		185 - 315
• Room heating capacity (min - max)	m ³	3,9 - 11,0
• Nominal heat output (min - max)	kW	89,6 - 91,6
• Thermal efficiency (min - max)	%	0,90 - 2,49
• Nominal consumption (min - max)	kg/h	43
• Hopper capacity	kg	302
• Stove weight	kg	15
• PMnom (13% O ₂)	mg/Nm ³	4
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			9.275,00
Cladding	Dome, sides and surrounds Bianco	P15046300C	2.980,00
	Dome, sides and surrounds Blu Verdemare	P15046110C	2.980,00
	Dome, sides and surrounds Canapa	P15046350C	2.980,00
	Dome, sides and surrounds Terra Bruna	P15046320C	2.980,00
	Dome, sides and surrounds Verde Mirto	P15046250C	2.980,00
TOTAL PRICE			9.740,00
Cladding	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verdemare	P15046114C	3.445,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Canapa	P15046354C	3.445,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Terra Bruna	P15046324C	3.445,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verde Mirto	P15046254C	3.445,00
	Stove	SP410-13	P07041500C
Essential kit	Top kit element	P08063020C	1.510,00
Accessories on request			
	Wireless temperature probe kit	N08013024C	70,00
	Rear union for wall ducting connection	N08019042C	35,00
	LCD remote control	P08062070C	125,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

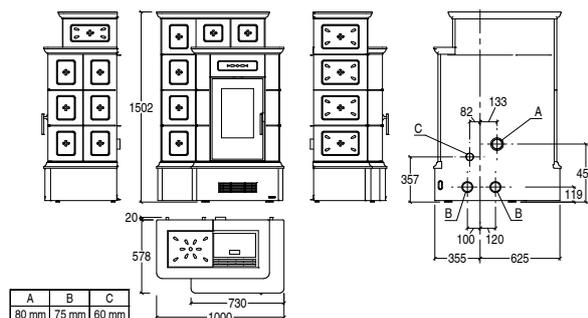

Dimensions in mm.

PELLET STUBOTTO

STUBOTTO C



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, manually or automatically controlled. Ductable hot air
- Multicomfort Plus: Standard
- Multicomfort: Standard
- Dual Power System: yes
- Front ventilation: directional air vent
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: cast iron / steel
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / detachable
- Standard flue outlet position: rear left
- LCD remote control: optional
- WiFi module- Bluetooth® for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Wireless probe for temperature management: optional
- Programmable timer-thermostat: 6 daily time period settings
- Pellet level sensor: yes
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation: wall - corner
- Conveyor: steel
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Air combustion System function: yes

TECHNICAL DATA

		STUBOTTO C
• Model		SP480-02
• Type		235 - 400
• Room heating capacity (min - max)	m ³	4,4 - 14,0
• Nominal heat output (min - max)	kW	89,1 - 91,3
• Thermal efficiency (min - max)	%	1,01 - 3,13
• Nominal consumption (min - max)	kg/h	45
• Hopper capacity	kg	275
• Stove weight	kg	15
• PMnom (13% O ₂)	mg/Nm ³	1
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			8.045,00
Cladding	BIANCO	P15095300C	2.330,00
TOTAL PRICE			8.425,00
Cladding	Dome Bianco Antico. Sides, surrounds and dome decorations Canapa	P15095351C	2.710,00
	Dome Bianco Antico. Sides, surrounds and dome decorations Rosso Lava	P15095451C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Canapa	P15095352C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Terra Bruna	P15095322C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Verde Mirto	P15095252C	2.710,00
Stove	STUBOTTO C	P07974200C	5.715,00
Accessories on request			
	Wireless temperature probe kit	N08013024C	70,00
	LCD remote control	P08062070C	125,00
	Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

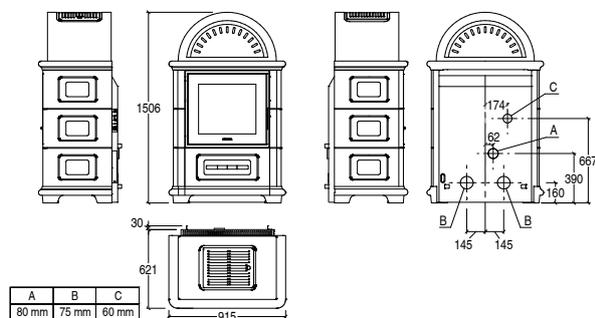

Dimensions in mm.

PELLET STUBOTTO

Accessories

ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Rear union for wall ducting connection (BRUNICO, CANAZEI, ORTISEI)			N08019042C	35,00
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 Aluminium Y connector for pellet stoves ^[2]	Ø 7,5	10	N08011016	28,00
 Aluminium Y connector for pellet stoves and for branching the hot air ducts ^[3]	Ø 7,5	10	N08011006	30,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00

[1] Available in 30 meter roll, minimum order quantity: 1 meter.

[2] For connecting the Multifuoco System fan to the flex pipe for ducting hot air.

[3] Used for branching the hot air ducts.

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Air vent with closure, enamelled white	L 25 x H 12 Ø 7,5	10	N08011001	60,00
 Wall air vent with closure, enamelled white	L 25 x H 11 Ø 7,5	6	N08011002	85,00
 Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
 Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
 Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
 Wall air vent, blasted steel	L 43 x H 5 Ø 7,5	1	NI08012410-0	270,00
 Wall air vent, black enamelled steel	L 43 x H 5 Ø 7,5	1	NI08014200-0	225,00
 Wall air vent, white enamelled steel	L 43 x H 5 Ø 7,5	1	NI08014410-0	225,00
 Air vent without closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00
 Air vent with closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00

WIRELESS TEMPERATURE PROBE KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Wireless temperature probe kit	All models	N08013024C	70,00

REMOTE CONTROL

ITEM	COMPATIBLE MODELS	CODE	EURO
 Remote control	All models	P08062070C	125,00


PELLET STUBOTTO

Accessories

ACCESSORIES FOR COMBUSTION AIR

ITEM	COMPATIBLE MODELS	CODE	EURO
 Flexible pipe Ø 6 cm for combustion air	All models	N08011017	20,00 per linear metre
 Aeration grille with spring for wall hole Ø 6,0-7,5 cm	All models	N08010014	5,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
 Rectangular steel floor plate	All models	100x120	P08024300C	335,00
 Round edged steel floor plate	All models	100x120	P08024310C	335,00

PIPES - BENDS - CONNECTORS FOR PELLET APPLIANCES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
 Pipe with inspection	L 25	80	P08025890	45,00
 Pipe	L 25	80	P08025370	40,00
	L 50	80	P08025380	66,00
	L 100	80	P08025390	99,00
 Bend 90° with inspection	L 16 x H 16	80	P08025910	99,00
 Bend 90°	L 16 x H 16	80	P08025400	92,00
 Bend 45°	L 12 x H 12	80	P08025410	66,00
 T-fitting w/RH and LH side inspection port	L 14 x H 18	80	P08027250	120,00
 T-fitting w/inspection port	L 18 x H 14	80	P08025430	105,00
 Flue ring	-	80	P08025490	35,00
 Wall connector	-	80	P08025550	35,00

WOOD-BURNING STOVES

CIRCLE	Hermetic	.140
CIRCLE	Hermetic BCS	.142
ROUND	Hermetic	.144
ROUND	Hermetic BCS	.145
ROUND-H	Hermetic	.146
ROUND-H	Hermetic BCS	.147
ROUND-M	Hermetic	.148
ROUND-M	Hermetic BCS	.149
E520		.150
E520	STEEL	.151
E520	C	.152
E520	T STEEL	.153
E530		.154
E530	STEEL	.155
E530	C	.156
E530	T STEEL	.157
E900	M with oven	.158
E924	Hermetic	.159
E924	Hermetic BCS	.161
E924	A Hermetic	.163
E924	A Hermetic BCS	.165
E924	A-H Hermetic	.167
E924	A-H Hermetic BCS	.169
E924	H Hermetic	.171
E924	H Hermetic BCS	.173
E924	M Hermetic	.175
E924	M Hermetic BCS	.177
E928		.179
E928	Hermetic BCS	.180
E928	A	.181
E928	A Hermetic BCS	.182
E928	C	.183
E928	C Hermetic BCS	.184
E928	C-H	.185
E928	C-H Hermetic BCS	.186
E928	C-M	.187
E928	C-M Hermetic BCS	.188
E928	D with oven	.189
E928	H	.190
E928	H Hermetic BCS	.191
E928	M	.192
E928	M Hermetic BCS	.193
E928	R	.194
E928	R with oven	.195
E928	STEEL	.196
E928	STEEL with oven	.197
E928	S with food warmer	.198
E928	S Hermetic BCS with food warmer	.199
E929	C Hermetic	.200
E929	C Hermetic BCS	.201
E929	C-H Hermetic	.202
E929	C-H Hermetic BCS	.203
E929	D Hermetic	.204
E929	D Hermetic BCS	.205
E929	D-H Hermetic	.206
E929	D-H Hermetic BCS	.207
E929	M Hermetic	.208
E929	M Hermetic BCS	.209
E929	M-H Hermetic	.210
E929	M-H Hermetic BCS	.211
E929	T Hermetic	.212
E929	T Hermetic BCS	.213
E940	C-F with oven	.214
E940	F with oven	.215
E940	F STEEL with oven	.216
Accessories		.228

WOOD-BURNING STOVES

CIRCLE Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Steel feet as standard: removable
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		CIRCLE SL300-03A 120 - 210
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	140
• Firebox opening W x H	mm	189
• Weight	kg	10
• Weight incl. HSS	kg	35
• PMnom (13% O ₂)	mg/Nm ³	
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD		
TOTAL PRICE			4.485,00
Cladding	ARDESIA	P06126240C	1.865,00
	BIANCO	P06126300C	1.865,00
	GRIGIO CERATO	P06126310C	1.865,00
	ROSSO LAVA	P06126450C	1.865,00
	BIANCO / ARDESIA	P06126241C	1.865,00
	BIANCO GRIGIO / TERRA COTTA	P06126091C	1.865,00
Stove	E924 Hermetic without rotation system	PI9240020-0	2.620,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Wall combustion air pipe cover kit for non-rotating stove base (indispensable for outdoor combustion air intake)	P08060820C	95,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OUTSIDE AIR KIT OPTIONAL		
TOTAL PRICE			4.930,00
Cladding	ARDESIA	P06126240C	1.865,00
	BIANCO	P06126300C	1.865,00
	GRIGIO CERATO	P06126310C	1.865,00
	ROSSO LAVA	P06126450C	1.865,00
	BIANCO / ARDESIA	P06126241C	1.865,00
	BIANCO GRIGIO / TERRA COTTA	P06126091C	1.865,00
Stove	E924 Hermetic with rotation system	PI9240020-1	3.065,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Combustion air kit for rotating stove base	P08060220C	90,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

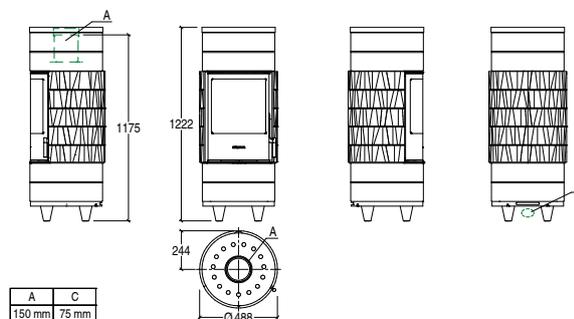

Dimensions in mm.

WOOD-BURNING STOVES

CIRCLE Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Steel feet as standard: removable
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		CIRCLE SL300-03A
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	140
• Firebox opening W x H	mm	189
• Weight	kg	10
• Weight incl. HSS	kg	35
• PMnom (13% O ₂)	mg/Nm ³	
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD	
TOTAL PRICE		4.575,00
Cladding	ARDESIA	P06111240C 1.955,00
	BIANCO	P06111300C 1.955,00
	GRIGIO CERATO	P06111310C 1.955,00
	ROSSO LAVA	P06111450C 1.955,00
	BIANCO / ARDESIA	P06111241C 1.955,00
	BIANCO GRIGIO / TERRA COTTA	P06111091C 1.955,00
Stove	E924 Hermetic without rotation system	PI9240020-0 2.620,00
Accessories on request		
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060130C	445,00
Rear flue kit (not compatible with storage kit)	P08060180C	115,00
Wall combustion air pipe cover kit for non-rotating stove base (indispensable for outdoor combustion air intake)	P08060820C	95,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

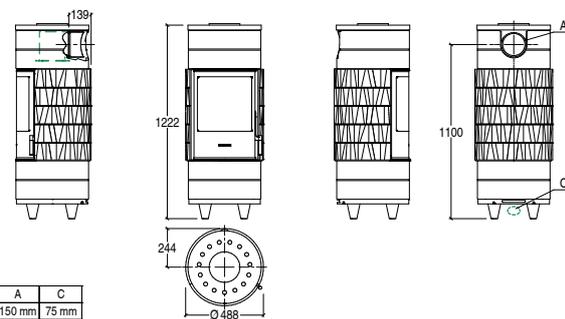

Dimensions in mm.

WOOD-BURNING STOVES

CIRCLE Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Steel feet as standard: removable
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


• Model		CIRCLE BCS
• Type		SL301-03A
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	140
• Weight incl. HSS	kg	189
• PM ₁₀ (13% O ₂)	mg/Nm ³	10
• OGC _{nom} (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD		
TOTAL PRICE			5.570,00
Cladding	ARDESIA	P06126240C	1.865,00
	BIANCO	P06126300C	1.865,00
	GRIGIO CERATO	P06126310C	1.865,00
	ROSSO LAVA	P06126450C	1.865,00
	BIANCO / ARDESIA	P06126241C	1.865,00
	BIANCO GRIGIO / TERRA COTTA	P06126091C	1.865,00
Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Wall combustion air pipe cover kit for non-rotating stove base (indispensable for outdoor combustion air intake)	P08060820C	95,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OUTSIDE AIR KIT OPTIONAL		
TOTAL PRICE			6.015,00
Cladding	ARDESIA	P06126240C	1.865,00
	BIANCO	P06126300C	1.865,00
	GRIGIO CERATO	P06126310C	1.865,00
	ROSSO LAVA	P06126450C	1.865,00
	BIANCO / ARDESIA	P06126241C	1.865,00
	BIANCO GRIGIO / TERRA COTTA	P06126091C	1.865,00
Stove	E924 Hermetic with rotation system	PI9241020-1	4.150,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Combustion air kit for rotating stove base	P08060220C	90,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

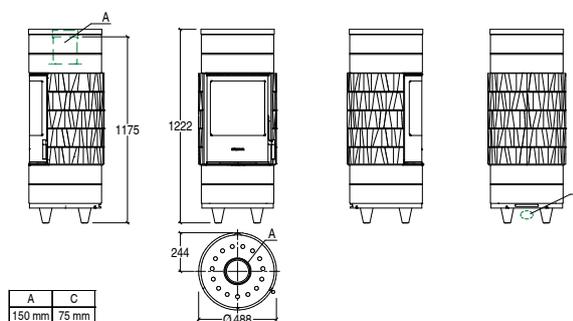

Dimensions in mm.

WOOD-BURNING STOVES

CIRCLE Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Steel feet as standard: removable
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

• Model		CIRCLE BCS
• Type		SL301-03A
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	140
• Weight incl. HSS	kg	189
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD	
---------	---	--


TOTAL PRICE	5.660,00	
-------------	-----------------	--

Cladding	ARDESIA	P06111240C	1.955,00
	BIANCO	P06111300C	1.955,00
	GRIGIO CERATO	P06111310C	1.955,00
	ROSSO LAVA	P06111450C	1.955,00
	BIANCO / ARDESIA	P06111241C	1.955,00
	BIANCO GRIGIO / TERRA COTTA	P06111091C	1.955,00

Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00
-------	---	-------------	----------

Accessories on request

Heat Storage System (HSS) kit (only compatible with top flue version)	P08060130C	445,00
Rear flue kit (not compatible with storage kit)	P08060180C	115,00
Wall combustion air pipe cover kit for non-rotating stove base (indispensable for outdoor combustion air intake)	P08060820C	95,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

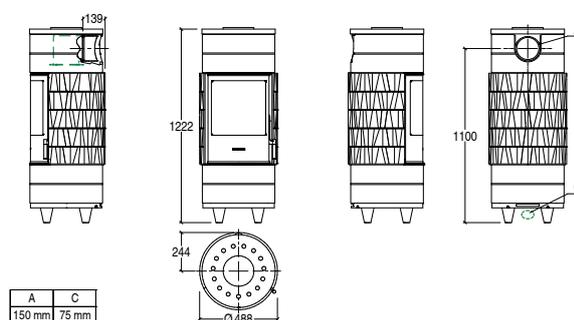

Dimensions in mm.

WOOD-BURNING STOVES

ROUND Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Steel feet as standard: removable
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		ROUND
• Model		SL310-04
• Type		135 - 230
• Room heating capacity (min - max)	m ³	135 - 230
• Nominal heat output max	kW	7,9
• Nominal thermal efficiency	%	85,7
• Nominal consumption	kg/h	2,2
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	162
• PMnom (13% O ₂)	mg/Nm ³	11
• OGCnom (13% O ₂)	mg/Nm ³	30

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			4.575,00
Cladding	ARDESIA	P06123240C	1.395,00
	BIANCO	P06123300C	1.395,00
	GRIGIO CERATO	P06123310C	1.395,00
	ROSSO LAVA	P06123450C	1.395,00
	BIANCO / ARDESIA	P06123241C	1.395,00
	BIANCO GRIGIO / TERRA COTTA	P06123091C	1.395,00
Stove	E929 Ermetica	P07929001C	2.700,00
Essential kit	Profile kits in painted steel	P08019280C	480,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

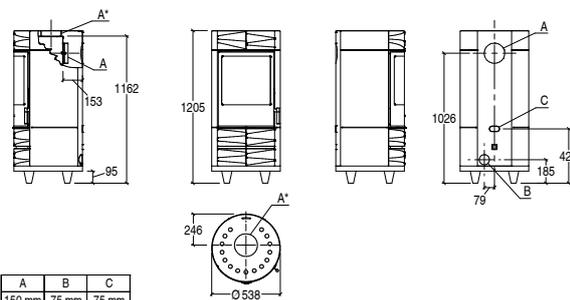

Dimensions in mm.

WOOD-BURNING STOVES

ROUND Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Steel feet as standard: removable
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		ROUND BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	162
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			5.870,00
Cladding	ARDESIA	P06123240C	1.395,00
	BIANCO	P06123300C	1.395,00
	GRIGIO CERATO	P06123310C	1.395,00
	ROSSO LAVA	P06123450C	1.395,00
	BIANCO / ARDESIA	P06123241C	1.395,00
	BIANCO GRIGIO / TERRA COTTA	P06123091C	1.395,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Essential kit	Profile kits in painted steel	P08019280C	480,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

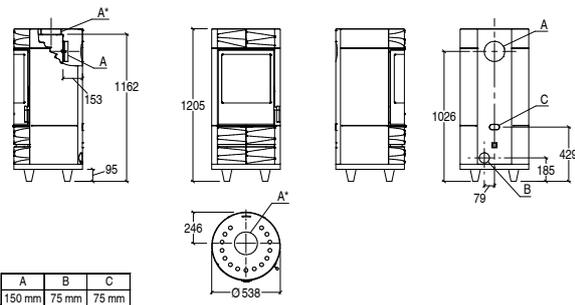

Dimensions in mm.

WOOD-BURNING STOVES

ROUND-H Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (rear flue not compatible with storage kit)
- Glass cleaning: continuous air flow
- Steel feet as standard: removable
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		ROUND-H SL310-04
• Model		ROUND-H SL310-04
• Type		135 - 230
• Room heating capacity (min - max)	m ³	7,9
• Nominal heat output max	kW	85,7
• Nominal thermal efficiency	%	2,2
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	185
• Weight	kg	318
• Weight incl. HSS	kg	11
• PMnom (13% O ₂)	mg/Nm ³	30
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			5.045,00
Cladding	ARDESIA	P06125240C	1.775,00
	BIANCO	P06125300C	1.775,00
	GRIGIO CERATO	P06125310C	1.775,00
	ROSSO LAVA	P06125450C	1.775,00
	BIANCO / ARDESIA	P06125241C	1.775,00
	BIANCO GRIGIO / TERRA COTTA	P06125091C	1.775,00
Stove	E929 Ermetica	P07929001C	2.700,00
Essential kit	Profile kits in painted steel	P08019300C	570,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019060C	1.060,00
	Convective hot air adjustment kit	P08060300C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

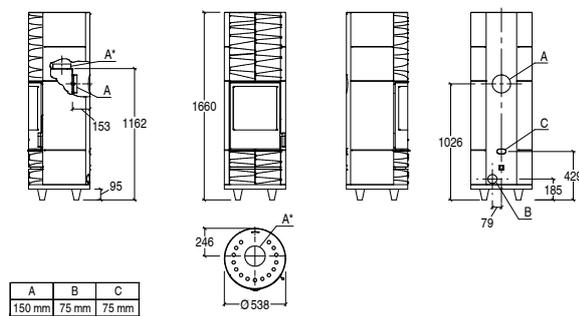

Dimensions in mm.

WOOD-BURNING STOVES

ROUND-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Steel feet as standard: removable
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		ROUND-H BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	185
• Weight incl. HSS	kg	318
• PM _{nom} (13% O ₂)	mg/Nm ³	9
• OGC _{nom} (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			6.340,00
Cladding	ARDESIA	P06125240C	1.775,00
	BIANCO	P06125300C	1.775,00
	GRIGIO CERATO	P06125310C	1.775,00
	ROSSO LAVA	P06125450C	1.775,00
	BIANCO / ARDESIA	P06125241C	1.775,00
	BIANCO GRIGIO / TERRA COTTA	P06125091C	1.775,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Essential kit	Profile kits in painted steel	P08019300C	570,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019060C	1.060,00
	Convective hot air adjustment kit	P08060300C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

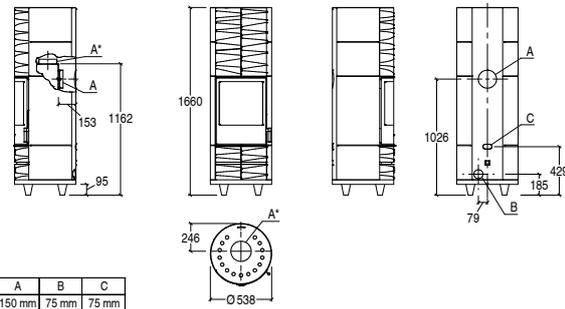

Dimensions in mm.

WOOD-BURNING STOVES

ROUND-M Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (rear flue not compatible with storage kit)
- Glass cleaning: continuous air flow
- Steel feet as standard: removable
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		ROUND-M SL310-04
• Model		ROUND-M SL310-04
• Type		135 - 230
• Room heating capacity (min - max)	m ³	135 - 230
• Nominal heat output max	kW	7,9
• Nominal thermal efficiency	%	85,7
• Nominal consumption	kg/h	2,2
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	170
• Weight incl. HSS	kg	204
• PMnom (13% O ₂)	mg/Nm ³	11
• OGCnom (13% O ₂)	mg/Nm ³	30

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			4.735,00
Cladding	ARDESIA	P06124240C	1.520,00
	BIANCO	P06124300C	1.520,00
	GRIGIO CERATO	P06124310C	1.520,00
	ROSSO LAVA	P06124450C	1.520,00
	BIANCO / ARDESIA	P06124241C	1.520,00
	BIANCO GRIGIO / TERRA COTTA	P06124091C	1.520,00
Stove	E929 Ermetica	P07929001C	2.700,00
Essential kit	Profile kits in painted steel	P08019290C	515,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019040C	565,00
	Convective hot air adjustment kit	P08060300C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

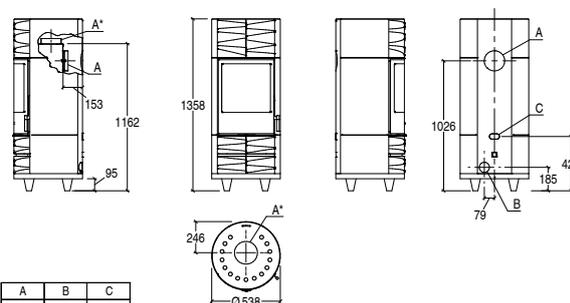

Dimensions in mm.

WOOD-BURNING STOVES

ROUND-M Hermetic BCS



GENERAL CHARACTERISTICS


- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Steel feet as standard: removable
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		ROUND-M BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	170
• Weight incl. HSS	kg	204
• PM ₁₀ (13% O ₂)	mg/Nm ³	9
• OGC _{nom} (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.

		CODE	EURO
TOTAL PRICE			6.030,00
Cladding	ARDESIA	P06124240C	1.520,00
	BIANCO	P06124300C	1.520,00
	GRIGIO CERATO	P06124310C	1.520,00
	ROSSO LAVA	P06124450C	1.520,00
	BIANCO / ARDESIA	P06124241C	1.520,00
	BIANCO GRIGIO / TERRA COTTA	P06124091C	1.520,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Essential kit	Profile kits in painted steel	P08019290C	515,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019040C	565,00
	Convective hot air adjustment kit	P08060300C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

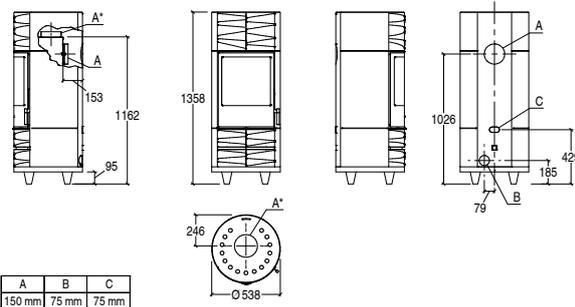

Dimensions in mm.



WOOD-BURNING STOVES

E520



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: majolica / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E520
• Type		SL260-02
• Room heating capacity (min - max)	m ³	110 - 190
• Nominal heat output	kW	6,5
• Nominal thermal efficiency	%	87,7
• Nominal consumption	kg/h	1,81
• Size of wood pieces	mm	250 - 300
• Firebox opening W x H	mm	267 x 265
• Weight	kg	127
• Weight incl. Heat Extender System	kg	158
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	15

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			2.525,00
Cladding	ARDESIA	P06500240C	875,00
	BIANCO CALCE	P06500940C	875,00
	MARRONE TENNÉ	P065003B0C	875,00
Stove	E520	P07520000C	1.650,00
Accessories on request			
	Multifuoco System® single	P08027800C	805,00
	Heat Extender System	P08063500C	645,00

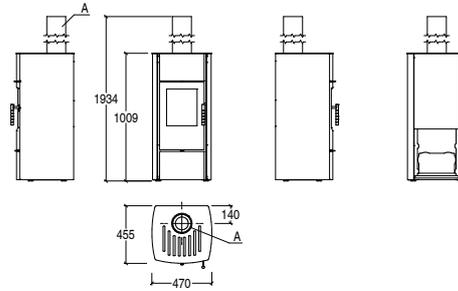

Dimensions in mm.

WOOD-BURNING STOVES

E520 STEEL



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E520 ST
• Type		SL260-02
• Room heating capacity (min - max)	m ³	110 - 190
• Nominal heat output	kW	6,5
• Nominal thermal efficiency	%	87,7
• Nominal consumption	kg/h	1,81
• Size of wood pieces	mm	250 - 300
• Firebox opening W x H	mm	267 x 265
• Weight	kg	105
• Weight incl. Heat Extender System	kg	149
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	15

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			1.895,00
Cladding	BIANCO OPACO	P19520010C	245,00
	CORTEN	P19520030C	245,00
	NERO OPACO	P19520020C	245,00
Stove	E520	P07520000C	1.650,00
Accessories on request			
Multifuoco System® single		P08027800C	805,00
Heat Extender System		P08063500C	645,00

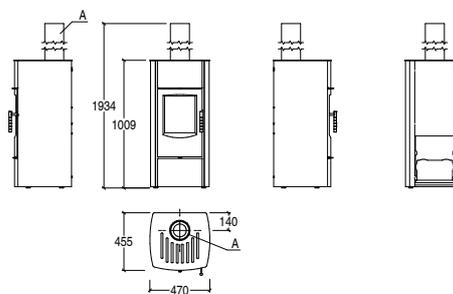

Dimensions in mm.

WOOD-BURNING STOVES

E520 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: majolica / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E520 C
• Type		SL260-02
• Room heating capacity (min - max)	m ³	110 - 190
• Nominal heat output	kW	6,5
• Nominal thermal efficiency	%	87,7
• Nominal consumption	kg/h	1,81
• Size of wood pieces	mm	250 - 300
• Firebox opening W x H	mm	267 x 265
• Weight	kg	122
• Weight incl. Heat Extender System	kg	153
• PMnom (13% O ₂)	mg/Nm ³	13
• OGCnom (13% O ₂)	mg/Nm ³	15

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			2.525,00
Cladding	BIANCO	P06501300C	875,00
	ROSSO LAVA	P06501450C	875,00
	VERDE MIRTO	P06501250C	875,00
Stove	E520	P07520000C	1.650,00
Accessories on request			
	Multifuoco System® single	P08027800C	805,00
	Heat Extender System	P08063500C	645,00

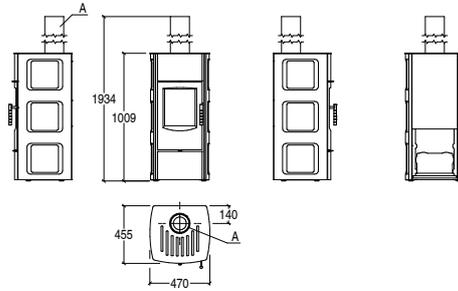

Dimensions in mm.

WOOD-BURNING STOVES

E520 T STEEL



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E520 T ST
• Type		SL260-02
• Room heating capacity (min - max)	m³	110 - 190
• Nominal heat output	kW	6,5
• Nominal thermal efficiency	%	87,7
• Nominal consumption	kg/h	1,81
• Size of wood pieces	mm	250 - 300
• Firebox opening W x H	mm	267 x 265
• Weight	kg	112
• Weight incl. Heat Extender System	kg	156
• PMnom (13% O ₂)	mg/Nm³	13
• OGCnom (13% O ₂)	mg/Nm³	15

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			2.015,00
Cladding	BIANCO OPACO	P19520110C	310,00
	CORTEN	P19520130C	310,00
	NERO OPACO	P19520120C	310,00
Stove	E520 T	P07520100C	1.705,00
Accessories on request			
	Multifuoco System® single	P08027810C	805,00
	Heat Extender System	P08063500C	645,00

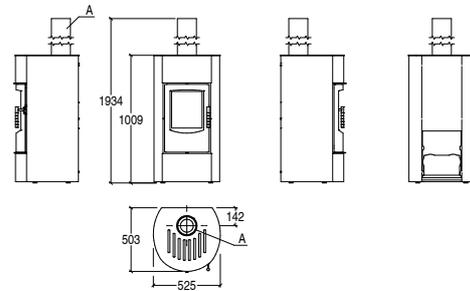

Dimensions in mm.

WOOD-BURNING STOVES

E530



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: majolica / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA


• Model		E530
• Type		SL270-02
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output	kW	8,5
• Nominal thermal efficiency	%	89,7
• Nominal consumption	kg/h	2,19
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	345 x 385
• Weight	kg	183
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	9

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

TOTAL PRICE			2.930,00
Cladding	ARDESIA	P06504240C	950,00
	BIANCO CALCE	P06504940C	950,00
	MARRONE TENNÉ	P065043B0C	950,00
Stove	E530	P07530000C	1.980,00
Accessories on request			
Multifuoco System® single		P08027820C	805,00
Heat Extender System		P08063510C	645,00

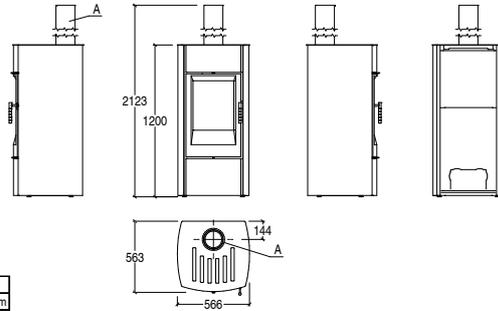

Dimensions in mm.

WOOD-BURNING STOVES

E530 STEEL



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E530 ST
• Type		SL270-02
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output	kW	8,5
• Nominal thermal efficiency	%	89,7
• Nominal consumption	kg/h	2,19
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	345 x 385
• Weight	kg	144
• Weight incl. Heat Extender System	kg	171
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	9

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			2.290,00
Cladding	BIANCO OPACO	P19530010C	310,00
	CORTEN	P19530030C	310,00
	NERO OPACO	P19530020C	310,00
Stove	E530	P07530000C	1.980,00
Accessories on request			
Multifuoco System® single		P08027820C	805,00
Heat Extender System		P08063510C	645,00

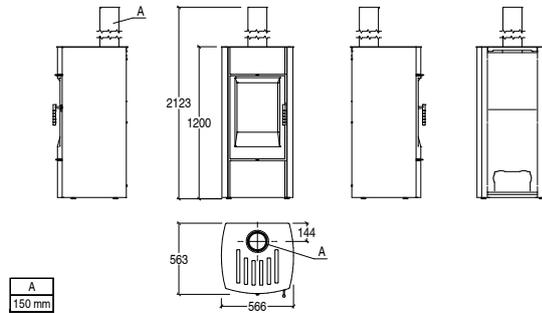

Dimensions in mm.

WOOD-BURNING STOVES

E530 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: majolica / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E530 C
• Type		SL270-02
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output	kW	8,5
• Nominal thermal efficiency	%	89,7
• Nominal consumption	kg/h	2,19
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	345 x 385
• Weight	kg	177
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	9

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			2.930,00
Cladding	BIANCO	P06505300C	950,00
	ROSSO LAVA	P06505450C	950,00
	VERDE MIRTO	P06505250C	950,00
Stove	E530	P07530000C	1.980,00
Accessories on request			
	Multifuoco System® single	P08027820C	805,00
	Heat Extender System	P08063510C	645,00

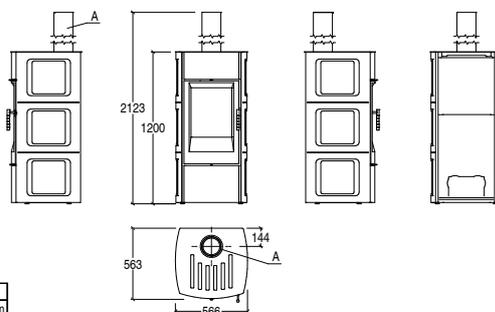

Dimensions in mm.

WOOD-BURNING STOVES

E530 T STEEL



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Heat Extender System, optional / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Fire pit: Skamolex
- Smoke baffle plate / Brazier: Skamolex / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Heat Extender System: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E530 T ST
• Type		SL270-02
• Room heating capacity (min - max)	m ³	145 - 245
• Nominal heat output	kW	8,5
• Nominal thermal efficiency	%	89,7
• Nominal consumption	kg/h	2,19
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	345 x 385
• Weight	kg	152
• Weight incl. Heat Extender System	kg	186
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	9

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			2.365,00
Cladding	BIANCO OPACO	P19530110C	335,00
	CORTEN	P19530130C	335,00
	NERO OPACO	P19530120C	335,00
Stove	E530 T	P07530100C	2.030,00
Accessories on request			
	Multifuoco System® single	P08027830C	805,00
	Heat Extender System	P08063510C	645,00

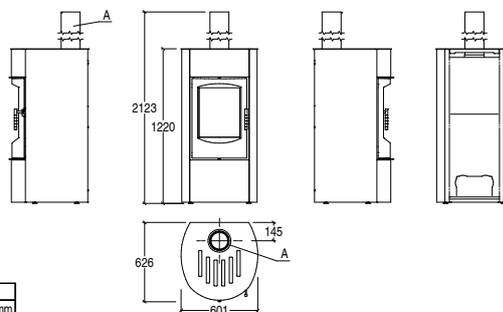

Dimensions in mm.

WOOD-BURNING STOVES

E900 M WITH OVEN



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: steel / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / brass
- Removable ash drawer: yes
- Ash tray: yes
- Oven: stainless steel
- Standard flue position: top (installation of anticondensation standard on top flue)
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E900 M
• Type		E900
• Room heating capacity (min - max)	m ³	220 - 375
• Nominal heat output max	kW	13,0
• Nominal thermal efficiency	%	79,0
• Nominal consumption	kg/h	3,9
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	390 x 270
• Oven W x D x H	mm	410 x 400 x 310
• Weight	kg	305
• PM ₁₀ (13% O ₂)	mg/Nm ³	16
• OGC _{PM10} (13% O ₂)	mg/Nm ³	60



		CODE	EURO
TOTAL STOVE			6.120,00
Cladding	BIANCO ANTICO	P06016640C	1.860,00
	ROSSO	P06016900C	1.860,00
	TERRA ORIENTE	P06016550C	1.860,00
Stove	E900	P07009002C	4.260,00
Accessories on request			
Multifuoco System® single		P08020170C	745,00
Multifuoco System Plus single		P08020510C	930,00

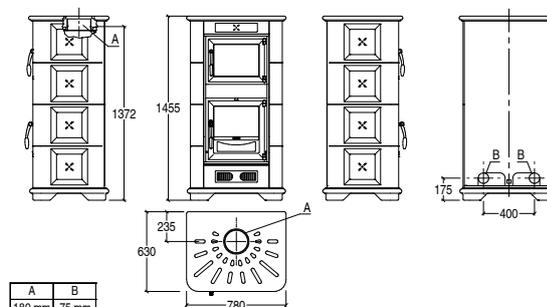

Dimensions in mm.

WOOD-BURNING STOVES

E924 Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924
• Model		SL300-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	141
• Weight incl. HSS	kg	190
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			4.145,00
Cladding	ARDESIA	P06120240C	1.525,00
	BIANCO	P06120300C	1.525,00
	GIALLO ACCESO	P06120260C	1.525,00
	GRIGIO CERATO	P06120310C	1.525,00
	NERO OPACO	P06120160C	1.525,00
	ROSSO LAVA	P06120450C	1.525,00
Stove	E924 Hermetic without rotation system	PI9240020-0	2.620,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OUTSIDE AIR KIT OPTIONAL		
TOTAL PRICE			4.590,00
Cladding	ARDESIA	P06120240C	1.525,00
	BIANCO	P06120300C	1.525,00
	GIALLO ACCESO	P06120260C	1.525,00
	GRIGIO CERATO	P06120310C	1.525,00
	NERO OPACO	P06120160C	1.525,00
	ROSSO LAVA	P06120450C	1.525,00
Stove	E924 Hermetic with rotation system	PI9240020-1	3.065,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

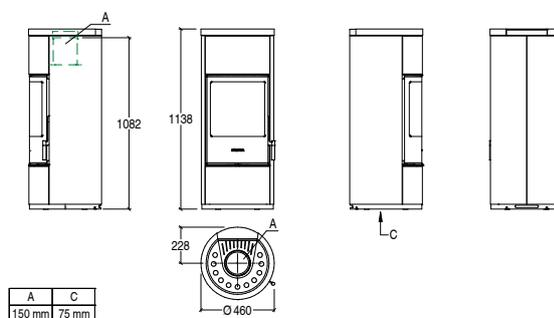

Dimensions in mm.

WOOD-BURNING STOVES

E924 Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924
• Model		SL300-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	141
• Weight incl. HSS	kg	190
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT OPTIONAL	
TOTAL PRICE		4.385,00
Cladding	ARDESIA	P06116240C 1.765,00
	BIANCO	P06116300C 1.765,00
	GIALLO ACCESO	P06116260C 1.765,00
	GRIGIO CERATO	P06116310C 1.765,00
	NERO OPACO	P06116160C 1.765,00
	ROSSO LAVA	P06116450C 1.765,00
Stove	E924 Hermetic without rotation system	PI9240020-0 2.620,00
Accessories on request		
	Combustion air kit for cladding for rear flue outlet and non-rotating stove base	P08060200C 185,00
	Heat Storage System (HSS) kit (only compatible with top flue version)	P08060130C 445,00
	Rear flue kit	P08060180C 115,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C 20,00 per linear metre

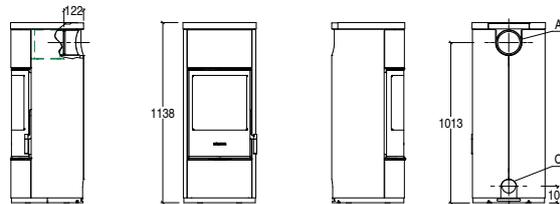

Dimensions in mm.

WOOD-BURNING STOVES

E924 Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 BCS SL301-03A
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	141
• Firebox opening W x H	mm	190
• Weight	kg	10
• Weight incl. HSS	kg	35
• PMnom (13% O ₂)	mg/Nm ³	
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			5.230,00
Cladding	ARDESIA	P06120240C	1.525,00
	BIANCO	P06120300C	1.525,00
	GIALLO ACCESO	P06120260C	1.525,00
	GRIGIO CERATO	P06120310C	1.525,00
	NERO OPACO	P06120160C	1.525,00
	ROSSO LAVA	P06120450C	1.525,00
Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00

Accessories on request


Heat Storage System (HSS) kit	P08060130C	445,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OUTSIDE AIR KIT OPTIONAL		
TOTAL PRICE			5.675,00
Cladding	ARDESIA	P06120240C	1.525,00
	BIANCO	P06120300C	1.525,00
	GIALLO ACCESO	P06120260C	1.525,00
	GRIGIO CERATO	P06120310C	1.525,00
	NERO OPACO	P06120160C	1.525,00
	ROSSO LAVA	P06120450C	1.525,00

Stove	E924 Hermetic BCS with rotation system	PI9241020-1	4.150,00
-------	--	-------------	----------

Accessories on request

Heat Storage System (HSS) kit	P08060130C	445,00
Combustion air kit for rotating stove base (for center room or wall mount units with duct for extracting outdoor air from at floor level)	P08060220C	90,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

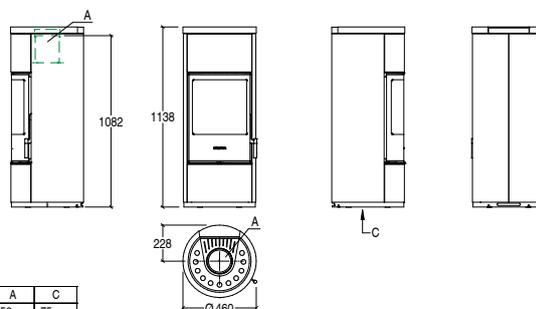

Dimensions in mm.

WOOD-BURNING STOVES

E924 Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 BCS SL301-03A
• Model		E924 BCS
• Type		SL301-03A
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	141
• Weight incl. HSS	kg	190
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO


VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT OPTIONAL	
TOTAL PRICE		5.470,00

Cladding			
	ARDESIA	P06116240C	1.765,00
	BIANCO	P06116300C	1.765,00
	GIALLO ACCESO	P06116260C	1.765,00
	GRIGIO CERATO	P06116310C	1.765,00
	NERO OPACO	P06116160C	1.765,00
	ROSSO LAVA	P06116450C	1.765,00

Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00
-------	---	-------------	----------

Accessories on request

Combustion air kit for cladding for rear flue outlet and non-rotating stove base	P08060200C	185,00
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060130C	445,00
Rear flue kit	P08060180C	115,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

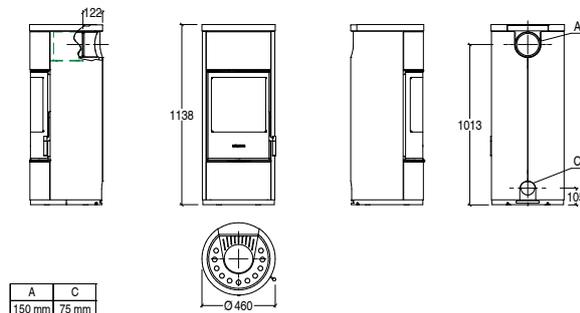

Dimensions in mm.

WOOD-BURNING STOVES

E924 A Hermetic



GENERAL CHARACTERISTICS

- Heating: natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924 A
• Model		SL300-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	143
• PM ₁₀ (13% O ₂)	mg/Nm ³	10
• OGC _{nom} (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD (EXTRACTING AIR AT FLOOR LEVEL/ OUTSIDE WALL)		
TOTAL PRICE			4.370,00
Cladding	ARDESIA	P06114240C	1.750,00
	BIANCO	P06114300C	1.750,00
	GIALLO ACCESO	P06114260C	1.750,00
	GRIGIO CERATO	P06114310C	1.750,00
	NERO OPACO	P06114160C	1.750,00
	ROSSO LAVA	P06114450C	1.750,00
Stove	E924 Hermetic without rotation system	PI9240010-0	2.620,00
Accessories on request			
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			4.275,00
Cladding	ARDESIA	P06119240C	1.655,00
	BIANCO	P06119300C	1.655,00
	GIALLO ACCESO	P06119260C	1.655,00
	GRIGIO CERATO	P06119310C	1.655,00
	NERO OPACO	P06119160C	1.655,00
	ROSSO LAVA	P06119450C	1.655,00
Stove	E924 Hermetic without rotation system	PI9240010-0	2.620,00
Accessories on request			
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

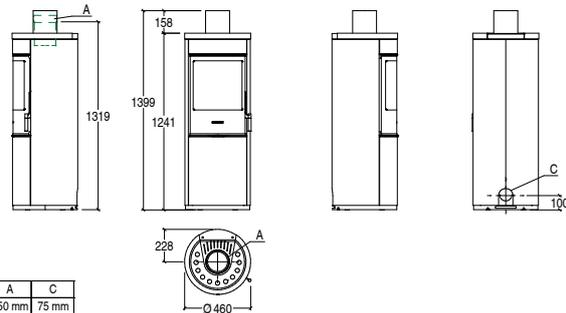

Dimensions in mm.

WOOD-BURNING STOVES

E924 A Hermetic



GENERAL CHARACTERISTICS

- Heating: natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 A SL300-03A
• Model		E924 A
• Type		SL300-03A
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	143
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.




CODE EURO

VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)	
TOTAL PRICE		4.775,00
Cladding	ARDESIA	P06119240C 1.655,00
	BIANCO	P06119300C 1.655,00
	GIALLO ACCESO	P06119260C 1.655,00
	GRIGIO CERATO	P06119310C 1.655,00
	NERO OPACO	P06119160C 1.655,00
	ROSSO LAVA	P06119450C 1.655,00
Stove	E924 Hermetic with rotation system	PI9240010-1 3.120,00

Accessories on request

Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

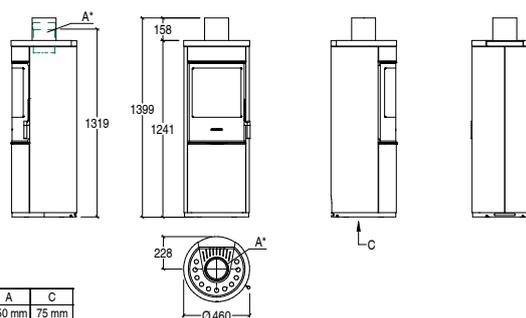

Dimensions in mm.

WOOD-BURNING STOVES

E924 A Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 A BCS SL301-03A
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	143
• Firebox opening W x H	mm	10
• Weight	kg	35
• PM ₁₀ (13% O ₂)	mg/Nm ³	
• OGC _{nom} (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD (EXTRACTING AIR AT FLOOR LEVEL/ OUTSIDE WALL)		
TOTAL PRICE	5.455,00		
Cladding	ARDESIA	P06114240C	1.750,00
	BIANCO	P06114300C	1.750,00
	GIALLO ACCESO	P06114260C	1.750,00
	GRIGIO CERATO	P06114310C	1.750,00
	NERO OPACO	P06114160C	1.750,00
	ROSSO LAVA	P06114450C	1.750,00
Stove	E924 Hermetic BCS without rotation system	PI9241010-0	3.705,00


Accessories on request

Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00
		per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE	5.360,00		
Cladding	ARDESIA	P06119240C	1.655,00
	BIANCO	P06119300C	1.655,00
	GIALLO ACCESO	P06119260C	1.655,00
	GRIGIO CERATO	P06119310C	1.655,00
	NERO OPACO	P06119160C	1.655,00
	ROSSO LAVA	P06119450C	1.655,00
Stove	E924 Hermetic BCS without rotation system	PI9241010-0	3.705,00

Accessories on request

Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00
		per linear metre

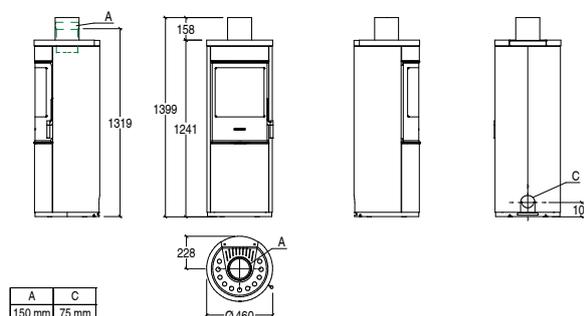

Dimensions in mm.

WOOD-BURNING STOVES

E924 A Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924 A BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	143
• PM ₁₀ (13% O ₂)	mg/Nm ³	10
• OGC _{nom} (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)	
TOTAL PRICE		5.860,00
Cladding	ARDESIA	P06119240C 1.655,00
	BIANCO	P06119300C 1.655,00
	GIALLO ACCESO	P06119260C 1.655,00
	GRIGIO CERATO	P06119310C 1.655,00
	NERO OPACO	P06119160C 1.655,00
	ROSSO LAVA	P06119450C 1.655,00
Stove	E924 Hermetic BCS with rotation system	PI9241010-1 4.205,00
Accessories on request		
Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

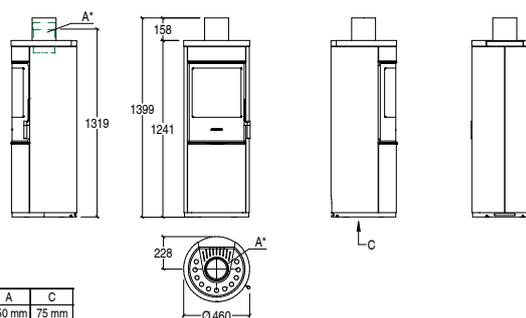

Dimensions in mm.

WOOD-BURNING STOVES

E924 A-H Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 A-H SL300-03A
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	163
• Firebox opening W x H	mm	277
• Weight	kg	10
• Weight incl. HSS	kg	35
• PMnom (13% O ₂)	mg/Nm ³	
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.




		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			4.825,00
Cladding	ARDESIA	P06117240C	2.205,00
	BIANCO	P06117300C	2.205,00
	GIALLO ACCESO	P06117260C	2.205,00
	GRIGIO CERATO	P06117310C	2.205,00
	NERO OPACO	P06117160C	2.205,00
	ROSSO LAVA	P06117450C	2.205,00
Stove	E924 Hermetic without rotation system	PI9240010-0	2.620,00

Accessories on request		
Heat Storage System (HSS) kit	P08060140C	730,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)		
TOTAL PRICE			5.325,00
Cladding	ARDESIA	P06117240C	2.205,00
	BIANCO	P06117300C	2.205,00
	GIALLO ACCESO	P06117260C	2.205,00
	GRIGIO CERATO	P06117310C	2.205,00
	NERO OPACO	P06117160C	2.205,00
	ROSSO LAVA	P06117450C	2.205,00
Stove	E924 Hermetic with rotation system	PI9240010-1	3.120,00

Accessories on request		
Heat Storage System (HSS) kit	P08060140C	730,00
Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

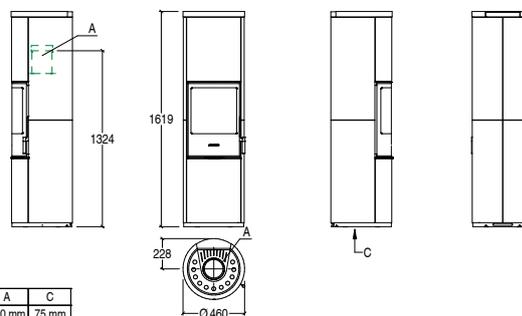

Dimensions in mm.

WOOD-BURNING STOVES

E924 A-H Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924 A-H SL300-03A
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	163
• Firebox opening W x H	mm	277
• Weight	kg	10
• Weight incl. HSS	kg	35
• PMnom (13% O ₂)	mg/Nm ³	
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD (EXTRACTING AIR AT FLOOR LEVEL/ OUTSIDE WALL)	
TOTAL PRICE		5.205,00
Cladding	ARDESIA	P06113240C 2.585,00
	BIANCO	P06113300C 2.585,00
	GIALLO ACCESO	P06113260C 2.585,00
	GRIGIO CERATO	P06113310C 2.585,00
	NERO OPACO	P06113160C 2.585,00
	ROSSO LAVA	P06113450C 2.585,00
Stove	E924 Hermetic without rotation system	PI9240010-0 2.620,00
Accessories on request		
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060140C	730,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

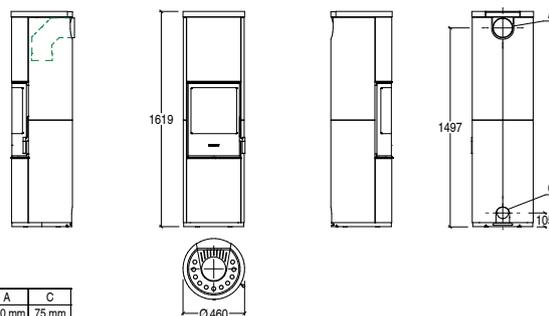

Dimensions in mm.

WOOD-BURNING STOVES

E924 A-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 A-H BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	7,2
• Nominal heat output max	kW	85
• Nominal thermal efficiency	%	1,95
• Nominal consumption	kg/h	270 - 300
• Size of wood pieces	mm	225 x 345
• Firebox opening W x H	mm	163
• Weight	kg	277
• Weight incl. HSS	kg	10
• PMnom (13% O ₂)	mg/Nm ³	35
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			5.910,00
Cladding	ARDESIA	P06117240C	2.205,00
	BIANCO	P06117300C	2.205,00
	GIALLO ACCESO	P06117260C	2.205,00
	GRIGIO CERATO	P06117310C	2.205,00
	NERO OPACO	P06117160C	2.205,00
	ROSSO LAVA	P06117450C	2.205,00
Stove	E924 Hermetic BCS without rotation system	PI9241010-0	3.705,00


Accessories on request

Heat Storage System (HSS) kit	P08060140C	730,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)		
TOTAL PRICE			6.410,00
Cladding	ARDESIA	P06117240C	2.205,00
	BIANCO	P06117300C	2.205,00
	GIALLO ACCESO	P06117260C	2.205,00
	GRIGIO CERATO	P06117310C	2.205,00
	NERO OPACO	P06117160C	2.205,00
	ROSSO LAVA	P06117450C	2.205,00
Stove	E924 Hermetic BCS with rotation system	PI9241010-1	4.205,00

Accessories on request

Heat Storage System (HSS) kit	P08060140C	730,00
Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

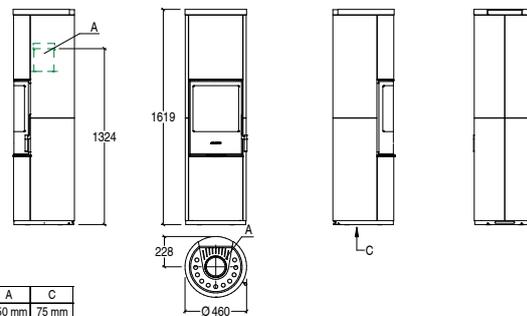

Dimensions in mm.

A	C
150 mm	75 mm

WOOD-BURNING STOVES

E924 A-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924 A-H BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	7,2
• Nominal heat output max	kW	85
• Nominal thermal efficiency	%	1,95
• Nominal consumption	kg/h	270 - 300
• Size of wood pieces	mm	225 x 345
• Firebox opening W x H	mm	163
• Weight	kg	277
• Weight incl. HSS	kg	10
• PMnom (13% O ₂)	mg/Nm ³	35
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - COMBUSTION AIR KIT, STANDARD (EXTRACTING AIR AT FLOOR LEVEL/ OUTSIDE WALL)	
TOTAL PRICE		6.290,00
Cladding	ARDESIA	P06113240C 2.585,00
	BIANCO	P06113300C 2.585,00
	GIALLO ACCESO	P06113260C 2.585,00
	GRIGIO CERATO	P06113310C 2.585,00
	NERO OPACO	P06113160C 2.585,00
	ROSSO LAVA	P06113450C 2.585,00
Stove	E924 Hermetic BCS without rotation system	PI9241010-0 3.705,00
Accessories on request		
	Heat Storage System (HSS) kit (only compatible with top flue version)	P08060140C 730,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C 20,00 per linear metre

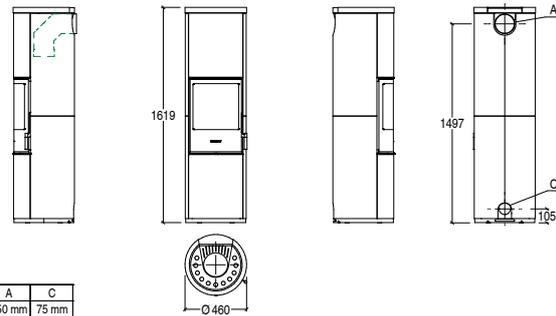

Dimensions in mm.

WOOD-BURNING STOVES

E924-H Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924-H SL300-03A
• Model		120 - 210
• Type		7,2
• Room heating capacity (min - max)	m ³	85
• Nominal heat output max	kW	1,95
• Nominal thermal efficiency	%	270 - 300
• Nominal consumption	kg/h	225 x 345
• Size of wood pieces	mm	151
• Firebox opening W x H	mm	265
• Weight	kg	10
• Weight incl. HSS	kg	35
• PMnom (13% O ₂)	mg/Nm ³	
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			4.445,00
Cladding	ARDESIA	P06118240C	1.825,00
	BIANCO	P06118300C	1.825,00
	GIALLO ACCESO	P06118260C	1.825,00
	GRIGIO CERATO	P06118310C	1.825,00
	NERO OPACO	P06118160C	1.825,00
	ROSSO LAVA	P06118450C	1.825,00
Stove	E924 Hermetic without rotation system	PI9240020-0	2.620,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060140C	730,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)		
TOTAL PRICE			4.890,00
Cladding	ARDESIA	P06118240C	1.825,00
	BIANCO	P06118300C	1.825,00
	GIALLO ACCESO	P06118260C	1.825,00
	GRIGIO CERATO	P06118310C	1.825,00
	NERO OPACO	P06118160C	1.825,00
	ROSSO LAVA	P06118450C	1.825,00
Stove	E924 Hermetic with rotation system	PI9240020-1	3.065,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060140C	730,00
	Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

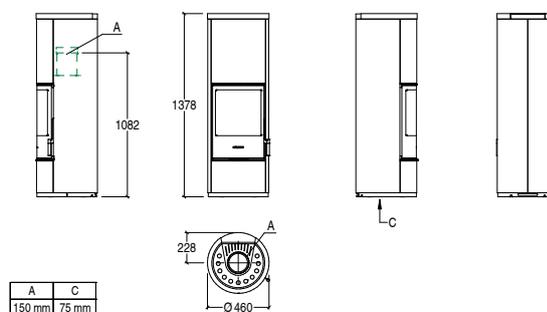

Dimensions in mm.

WOOD-BURNING STOVES

E924-H Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924-H SL300-03A
• Model		120 - 210
• Type		
• Room heating capacity (min - max)	m ³	7,2
• Nominal heat output max	kW	85
• Nominal thermal efficiency	%	1,95
• Nominal consumption	kg/h	270 - 300
• Size of wood pieces	mm	225 x 345
• Firebox opening W x H	mm	151
• Weight	kg	265
• Weight incl. HSS	kg	10
• PMnom (13% O ₂)	mg/Nm ³	35
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT OPTIONAL	
TOTAL PRICE		4.750,00
Cladding	ARDESIA	P06112240C 2.130,00
	BIANCO	P06112300C 2.130,00
	GIALLO ACCESO	P06112260C 2.130,00
	GRIGIO CERATO	P06112310C 2.130,00
	NERO OPACO	P06112160C 2.130,00
	ROSSO LAVA	P06112450C 2.130,00
Stove	E924 Hermetic without rotation system	PI9240020-0 2.620,00
Accessories on request		
Combustion air kit for cladding for rear flue outlet and non-rotating stove base	P08060200C	185,00
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060140C	730,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

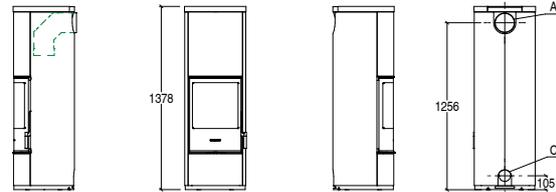

Dimensions in mm.

WOOD-BURNING STOVES

E924-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924-H BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	7,2
• Nominal heat output max	kW	85
• Nominal thermal efficiency	%	1,95
• Nominal consumption	kg/h	270 - 300
• Size of wood pieces	mm	225 x 345
• Firebox opening W x H	mm	151
• Weight	kg	265
• Weight incl. HSS	kg	10
• PMnom (13% O ₂)	mg/Nm ³	35
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			5.530,00
Cladding	ARDESIA	P06118240C	1.825,00
	BIANCO	P06118300C	1.825,00
	GIALLO ACCESO	P06118260C	1.825,00
	GRIGIO CERATO	P06118310C	1.825,00
	NERO OPACO	P06118160C	1.825,00
	ROSSO LAVA	P06118450C	1.825,00
Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060140C	730,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)		
TOTAL PRICE			5.975,00
Cladding	ARDESIA	P06118240C	1.825,00
	BIANCO	P06118300C	1.825,00
	GIALLO ACCESO	P06118260C	1.825,00
	GRIGIO CERATO	P06118310C	1.825,00
	NERO OPACO	P06118160C	1.825,00
	ROSSO LAVA	P06118450C	1.825,00
Stove	E924 Hermetic BCS with rotation system	PI9241020-1	4.150,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060140C	730,00
	Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

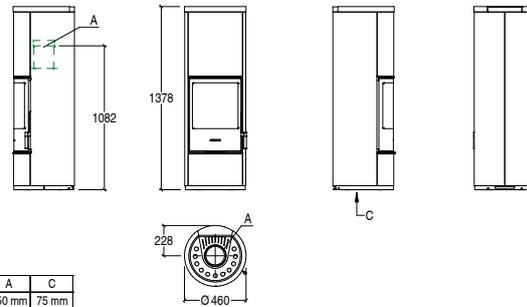

Dimensions in mm.

WOOD-BURNING STOVES

E924-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924-H BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	7,2
• Nominal heat output max	kW	85
• Nominal thermal efficiency	%	1,95
• Nominal consumption	kg/h	270 - 300
• Size of wood pieces	mm	225 x 345
• Firebox opening W x H	mm	151
• Weight	kg	265
• Weight incl. HSS	kg	10
• PM ₁₀ (13% O ₂)	mg/Nm ³	35
• OGC _{nom} (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT OPTIONAL	
---------	---	--


TOTAL PRICE **5.835,00**

Cladding			
ARDESIA	P06112240C	2.130,00	
BIANCO	P06112300C	2.130,00	
GIALLO ACCESO	P06112260C	2.130,00	
GRIGIO CERATO	P06112310C	2.130,00	
NERO OPACO	P06112160C	2.130,00	
ROSSO LAVA	P06112450C	2.130,00	

Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00
-------	---	-------------	----------

Accessories on request

Combustion air kit for cladding for rear flue outlet and non-rotating stove base	P08060200C	185,00
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060140C	730,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

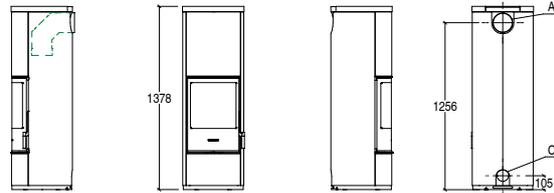

Dimensions in mm.

WOOD-BURNING STOVES

E924 M Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924 M SL300-03A
• Model		E924 M SL300-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	147
• Weight incl. HSS	kg	196
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			4.145,00
Cladding	ARDESIA	P06121240C	1.525,00
	BIANCO	P06121300C	1.525,00
	GIALLO ACCESO	P06121260C	1.525,00
	GRIGIO CERATO	P06121310C	1.525,00
	NERO OPACO	P06121160C	1.525,00
	ROSSO LAVA	P06121450C	1.525,00
Stove	E924 Hermetic without rotation system	PI9240020-0	2.620,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)		
TOTAL PRICE			4.590,00
Cladding	ARDESIA	P06121240C	1.525,00
	BIANCO	P06121300C	1.525,00
	GIALLO ACCESO	P06121260C	1.525,00
	GRIGIO CERATO	P06121310C	1.525,00
	NERO OPACO	P06121160C	1.525,00
	ROSSO LAVA	P06121450C	1.525,00
Stove	E924 Hermetic with rotation system	PI9240020-1	3.065,00
Accessories on request			
	Heat Storage System (HSS) kit	P08060130C	445,00
	Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C	90,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

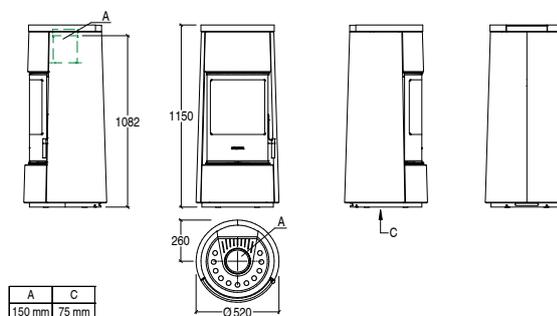

Dimensions in mm.

WOOD-BURNING STOVES

E924 M Hermetic



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear (feasible by choosing the appropriate cladding)
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS accumulation: optional
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


		E924 M
• Model		SL300-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	147
• Weight incl. HSS	kg	196
• PM ₁₀ (13% O ₂)	mg/Nm ³	10
• OGC _{nom} (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT OPTIONAL	
TOTAL PRICE		4.385,00
Cladding	ARDESIA	P06115240C 1.765,00
	BIANCO	P06115300C 1.765,00
	GIALLO ACCESO	P06115260C 1.765,00
	GRIGIO CERATO	P06115310C 1.765,00
	NERO OPACO	P06115160C 1.765,00
	ROSSO LAVA	P06115450C 1.765,00
Stove	E924 Hermetic without rotation system	PI9240020-0 2.620,00
Accessories on request		
Combustion air kit for cladding for rear flue outlet and non-rotating stove base	P08060200C	185,00
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060130C	445,00
Rear flue kit	P08060180C	115,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

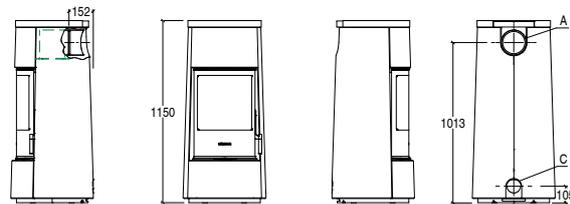

Dimensions in mm.

WOOD-BURNING STOVES

E924 M Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 M BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	147
• Weight incl. HSS	kg	196
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.




		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			5.230,00
Cladding	ARDESIA	P06121240C	1.525,00
	BIANCO	P06121300C	1.525,00
	GIALLO ACCESO	P06121260C	1.525,00
	GRIGIO CERATO	P06121310C	1.525,00
	NERO OPACO	P06121160C	1.525,00
	ROSSO LAVA	P06121450C	1.525,00
Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00

Accessories on request			
Heat Storage System (HSS) kit	P08060130C		445,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C		20,00 per linear metre

		CODE	EURO
VERSION	- ONLY TOP FLUE OUTLET - ROTATION SYSTEM - OPTIONAL OUTSIDE AIR KIT (EXTRACTING AIR AT FLOOR LEVEL)		
TOTAL PRICE			5.675,00
Cladding	ARDESIA	P06121240C	1.525,00
	BIANCO	P06121300C	1.525,00
	GIALLO ACCESO	P06121260C	1.525,00
	GRIGIO CERATO	P06121310C	1.525,00
	NERO OPACO	P06121160C	1.525,00
	ROSSO LAVA	P06121450C	1.525,00
Stove	E924 Hermetic BCS with rotation system	PI9241020-1	4.150,00

Accessories on request			
Heat Storage System (HSS) kit	P08060130C		445,00
Combustion air kit for rotating stove base (for center room or wall mount units with with duct for extracting outdoor air from at floor level)	P08060220C		90,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C		20,00 per linear metre

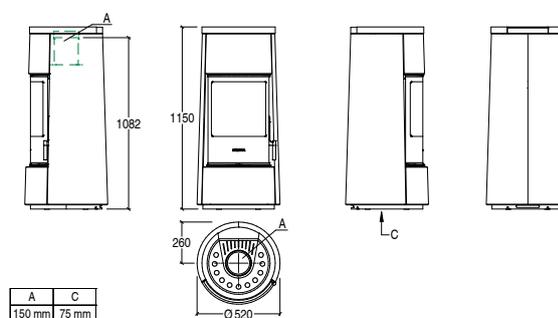

Dimensions in mm.

WOOD-BURNING STOVES

E924 M Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional (only on top flue version)
- Glass cleaning: continuous air flow
- Stove base: rotating or fixed
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E924 M BCS
• Model		SL301-03A
• Type		120 - 210
• Room heating capacity (min - max)	m ³	7,2
• Nominal heat output max	kW	85
• Nominal thermal efficiency	%	1,95
• Nominal consumption	kg/h	270 - 300
• Size of wood pieces	mm	225 x 345
• Firebox opening W x H	mm	147
• Weight	kg	196
• Weight incl. HSS	kg	10
• PMnom (13% O ₂)	mg/Nm ³	35
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	- TOP OR REAR FLUE OUTLET - FIXED BASE - OUTSIDE AIR KIT OPTIONAL	
---------	---	--


TOTAL PRICE		5.470,00
-------------	--	-----------------

Cladding			
ARDESIA	P06115240C	1.765,00	
BIANCO	P06115300C	1.765,00	
GIALLO ACCESO	P06115260C	1.765,00	
GRIGIO CERATO	P06115310C	1.765,00	
NERO OPACO	P06115160C	1.765,00	
ROSSO LAVA	P06115450C	1.765,00	

Stove	E924 Hermetic BCS without rotation system	PI9241020-0	3.705,00
-------	---	-------------	----------

Accessories on request

Combustion air kit for cladding for rear flue outlet and non-rotating stove base	P08060200C	185,00
Heat Storage System (HSS) kit (only compatible with top flue version)	P08060130C	445,00
Rear flue kit	P08060180C	115,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

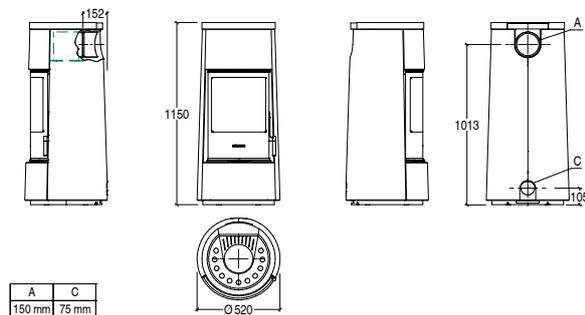

Dimensions in mm.

WOOD-BURNING STOVES

E928



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928
• Model		SL31-01A
• Type		185 - 315
• Room heating capacity (min - max)	m ³	5,5 - 11,0
• Nominal heat output (min - max)	kW	83 - 86
• Nominal thermal efficiency (min - max)	%	1,51 - 2,93
• Nominal consumption (min - max)	kg/h	370 - 400
• Size of wood pieces	mm	330 x 395
• Firebox opening W x H	mm	240
• Weight	kg	284
• Weight incl. HSS	kg	12
• PM _{nom} (13% O ₂)	mg/Nm ³	35
• OG _{Cnom} (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			4.560,00
Cladding	BIANCO	P06151300C	1.565,00
	NERO OPACO	P06151160C	1.565,00
	ROSSO LAVA	P06151450C	1.565,00
	TERRA COTTA	P06151090C	1.565,00
Stove	E928	P07928000C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Heat Storage System (HSS) kit	P08061600C	390,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

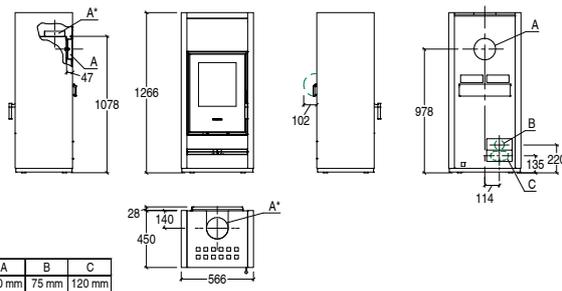

Dimensions in mm.

WOOD-BURNING STOVES


E928 Hermetic BCS



		CODE	EURO
TOTAL PRICE			5.640,00
Cladding	BIANCO	P06151300C	1.565,00
	NERO OPACO	P06151160C	1.565,00
	ROSSO LAVA	P06151450C	1.565,00
	TERRA COTTA	P06151090C	1.565,00
Stove	E928 Hermetic Burn Control System	P07928100C	4.075,00
Accessories on request			
	Multifuoco System Plus single	P08020700C	470,00
	Heat Storage System (HSS) kit	P08061600C	390,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

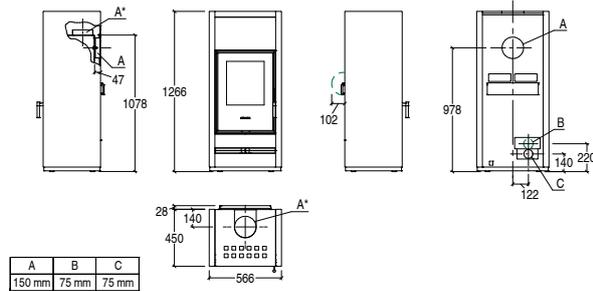

Dimensions in mm.

TECHNICAL DATA

		E928 BCS
• Model		SL32-01
• Type		185 - 320
• Room heating capacity (min - max)	m ³	5,5 - 11,1
• Nominal heat output (min - max)	kW	84,8 - 86,6
• Nominal thermal efficiency (min - max)	%	1,4 - 2,9
• Nominal consumption (min - max)	kg/h	370 - 400
• Size of wood pieces	mm	330 x 395
• Firebox opening W x H	mm	245
• Weight	kg	289
• Weight incl. HSS	kg	8
• PM _{nom} (13% O ₂)	mg/Nm ³	25
• OG _{Cnom} (13% O ₂)	mg/Nm ³	



WOOD-BURNING STOVES

E928 A



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E928 A
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	255
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			4.725,00
Cladding	BIANCO	P06154300C	1.730,00
	NERO OPACO	P06154160C	1.730,00
	ROSSO LAVA	P06154450C	1.730,00
	TERRA COTTA	P06154090C	1.730,00
Stove	E928	P07928000C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

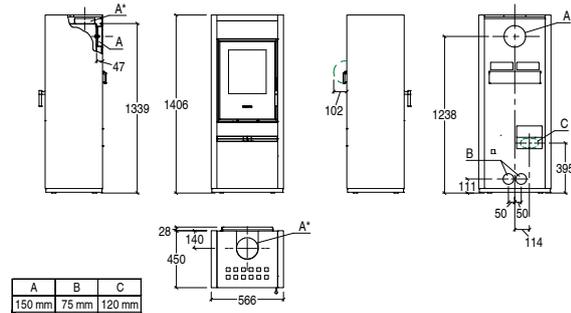

Dimensions in mm.

WOOD-BURNING STOVES

E928 A Hermetic BCS



GENERAL CHARACTERISTICS


- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E928 A BCS
• Type		SL32-01
• Room heating capacity (min - max)	m ³	185 - 320
• Nominal heat output (min - max)	kW	5,5 - 11,1
• Nominal thermal efficiency (min - max)	%	84,8 - 86,6
• Nominal consumption (min - max)	kg/h	1,4 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	260
• PMnom (13% O ₂)	mg/Nm ³	8
• OGCnom (13% O ₂)	mg/Nm ³	25



		CODE	EURO
TOTAL PRICE			5.805,00
Cladding	BIANCO	P06154300C	1.730,00
	NERO OPACO	P06154160C	1.730,00
	ROSSO LAVA	P06154450C	1.730,00
	TERRA COTTA	P06154090C	1.730,00
Stove	E928 Hermetic Burn Control System	P07928100C	4.075,00
Accessories on request			
	Multifuoco System Plus single	P08020700C	470,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

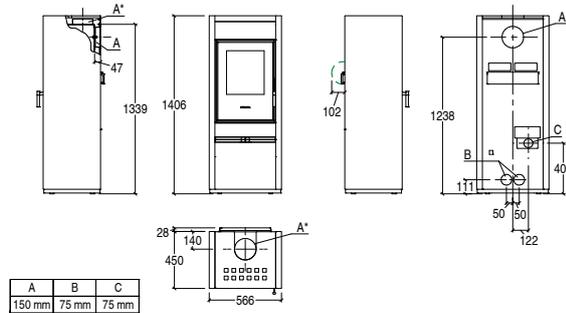

Dimensions in mm.

WOOD-BURNING STOVES

E928 C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E928 C
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	260
• Weight incl. HSS	kg	320
• PM _{nom} (13% O ₂)	mg/Nm ³	12
• OGC _{nom} (13% O ₂)	mg/Nm ³	35



		CODE	EURO
VERSION - WITH FRONT AIR VENT			
TOTAL PRICE			4.745,00
Cladding	BIANCO	P06169300C	1.750,00
	BIANCO GRIGIO	P06169410C	1.750,00
	CANAPA	P06169350C	1.750,00
	KAKI	P06169990C	1.750,00
	ROSSO LAVA	P06169450C	1.750,00
	VERDE MIRTO	P06169250C	1.750,00
Stove	E928 C	P07928200C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Heat Storage System (HSS) kit	P08061630C	565,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

		CODE	EURO
VERSION - WITHOUT FRONT AIR VENT			
TOTAL PRICE			4.745,00
Cladding	BIANCO	P06164300C	1.750,00
	BIANCO GRIGIO	P06164410C	1.750,00
	CANAPA	P06164350C	1.750,00
	KAKI	P06164990C	1.750,00
	ROSSO LAVA	P06164450C	1.750,00
	VERDE MIRTO	P06164250C	1.750,00
Stove	E928 C	P07928200C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Rear air vent kit	P08061390C	240,00
	Heat Storage System (HSS) kit	P08061630C	565,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

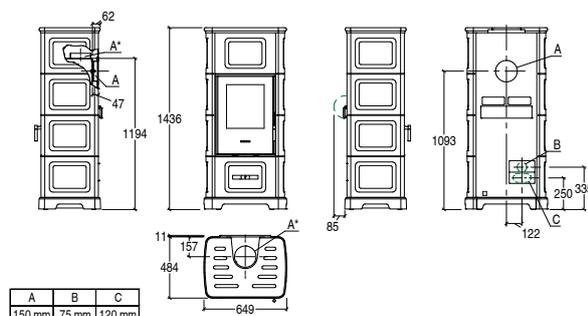

Dimensions in mm.

WOOD-BURNING STOVES

E928 C Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E928 C BCS
• Type		SL32-01
• Room heating capacity (min - max)	m ³	185 - 320
• Nominal heat output (min - max)	kW	5,5 - 11,1
• Nominal thermal efficiency (min - max)	%	84,8 - 86,6
• Nominal consumption (min - max)	kg/h	1,4 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	265
• Weight incl. HSS	kg	325
• PM _{nom} (13% O ₂)	mg/Nm ³	8
• OGC _{nom} (13% O ₂)	mg/Nm ³	25



VERSION	- WITH FRONT AIR VENT	CODE	EURO
TOTAL PRICE			5.825,00
Cladding	BIANCO	P06169300C	1.750,00
	BIANCO GRIGIO	P06169410C	1.750,00
	CANAPA	P06169350C	1.750,00
	KAKI	P06169990C	1.750,00
	ROSSO LAVA	P06169450C	1.750,00
	VERDE MIRTO	P06169250C	1.750,00
Stove	E928 C Hermetic Burn Control System	P07928300C	4.075,00
Accessories on request			
Multifuoco System Plus single		P08020700C	470,00
Heat Storage System (HSS) kit		P08061630C	565,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

VERSION	- WITHOUT FRONT AIR VENT	CODE	EURO
TOTAL PRICE			5.825,00
Cladding	BIANCO	P06164300C	1.750,00
	BIANCO GRIGIO	P06164410C	1.750,00
	CANAPA	P06164350C	1.750,00
	KAKI	P06164990C	1.750,00
	ROSSO LAVA	P06164450C	1.750,00
	VERDE MIRTO	P06164250C	1.750,00
Stove	E928 C Hermetic Burn Control System	P07928300C	4.075,00
Accessories on request			
Multifuoco System Plus single		P08020700C	470,00
Rear air vent kit		P08061390C	240,00
Heat Storage System (HSS) kit		P08061630C	565,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

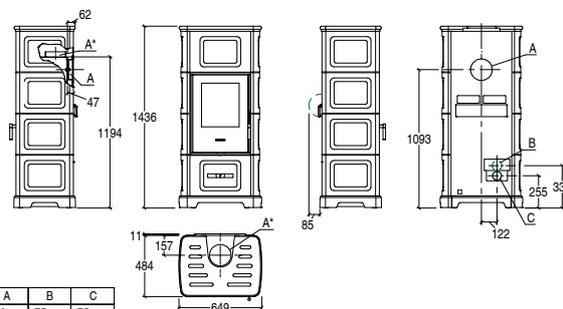

Dimensions in mm.

WOOD-BURNING STOVES

E928 C-H



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E928 C-H
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	310
• Weight incl. HSS	kg	610
• PM _{nom} (13% O ₂)	mg/Nm ³	12
• OGC _{nom} (13% O ₂)	mg/Nm ³	35



		CODE	EURO
VERSION		- WITH FRONT AIR VENT	
TOTAL PRICE			5.495,00
Cladding	BIANCO	P06161300C	2.500,00
	BIANCO GRIGIO	P06161410C	2.500,00
	CANAPA	P06161350C	2.500,00
	KAKI	P06161990C	2.500,00
	ROSSO LAVA	P06161450C	2.500,00
	VERDE MIRTO	P06161250C	2.500,00
Stove	E928 C	P07928200C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Heat Storage System (HSS) kit	P08061650C	2.455,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

		CODE	EURO
VERSION		- WITHOUT FRONT AIR VENT	
TOTAL PRICE			5.495,00
Cladding	BIANCO	P06156300C	2.500,00
	BIANCO GRIGIO	P06156410C	2.500,00
	CANAPA	P06156350C	2.500,00
	KAKI	P06156990C	2.500,00
	ROSSO LAVA	P06156450C	2.500,00
	VERDE MIRTO	P06156250C	2.500,00
Stove	E928 C	P07928200C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Rear air vent kit	P08061390C	240,00
	Heat Storage System (HSS) kit	P08061650C	2.455,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

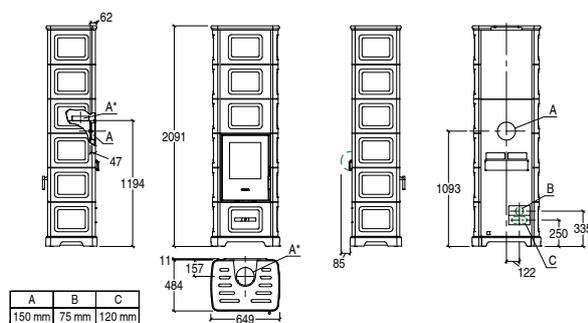

Dimensions in mm.

WOOD-BURNING STOVES

E928 C-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E928 C-H BCS
• Model		SL32-01
• Type		185 - 320
• Room heating capacity (min - max)	m ³	5,5 - 11,1
• Nominal heat output (min - max)	kW	84,8 - 86,6
• Nominal thermal efficiency (min - max)	%	1,4 - 2,9
• Nominal consumption (min - max)	kg/h	370 - 400
• Size of wood pieces	mm	330 x 395
• Firebox opening W x H	mm	315
• Weight	kg	615
• Weight incl. HSS	kg	8
• PM _{nom} (13% O ₂)	mg/Nm ³	25
• OGC _{nom} (13% O ₂)	mg/Nm ³	



VERSION	- WITH FRONT AIR VENT	CODE	EURO
TOTAL PRICE			6.575,00
Cladding	BIANCO	P06161300C	2.500,00
	BIANCO GRIGIO	P06161410C	2.500,00
	CANAPA	P06161350C	2.500,00
	KAKI	P06161990C	2.500,00
	ROSSO LAVA	P06161450C	2.500,00
	VERDE MIRTO	P06161250C	2.500,00
Stove	E928 C Hermetic Burn Control System	P07928300C	4.075,00
Accessories on request			
Multifuoco System Plus single		P08020700C	470,00
Heat Storage System (HSS) kit		P08061650C	2.455,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

VERSION	- WITHOUT FRONT AIR VENT	CODE	EURO
TOTAL PRICE			6.575,00
Cladding	BIANCO	P06156300C	2.500,00
	BIANCO GRIGIO	P06156410C	2.500,00
	CANAPA	P06156350C	2.500,00
	KAKI	P06156990C	2.500,00
	ROSSO LAVA	P06156450C	2.500,00
	VERDE MIRTO	P06156250C	2.500,00
Stove	E928 C Hermetic Burn Control System	P07928300C	4.075,00
Accessories on request			
Multifuoco System Plus single		P08020700C	470,00
Rear air vent kit		P08061390C	240,00
Heat Storage System (HSS) kit		P08061650C	2.455,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

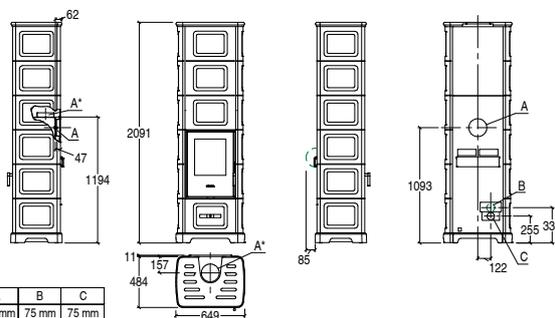

Dimensions in mm.

WOOD-BURNING STOVES

E928 C-M



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E928 C-M
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	285
• Weight incl. HSS	kg	447
• PM _{nom} (13% O ₂)	mg/Nm ³	12
• OGC _{nom} (13% O ₂)	mg/Nm ³	35



		CODE	EURO
VERSION		- WITH FRONT AIR VENT	
TOTAL PRICE			5.180,00
Cladding	BIANCO	P06165300C	2.185,00
	BIANCO GRIGIO	P06165410C	2.185,00
	CANAPA	P06165350C	2.185,00
	KAKI	P06165990C	2.185,00
	ROSSO LAVA	P06165450C	2.185,00
	VERDE MIRTO	P06165250C	2.185,00
Stove	E928 C	P07928200C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Heat Storage System (HSS) kit	P08061640C	1.475,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

		CODE	EURO
VERSION		- WITHOUT FRONT AIR VENT	
TOTAL PRICE			5.180,00
Cladding	BIANCO	P06160300C	2.185,00
	BIANCO GRIGIO	P06160410C	2.185,00
	CANAPA	P06160350C	2.185,00
	KAKI	P06160990C	2.185,00
	ROSSO LAVA	P06160450C	2.185,00
	VERDE MIRTO	P06160250C	2.185,00
Stove	E928 C	P07928200C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Rear air vent kit	P08061390C	240,00
	Heat Storage System (HSS) kit	P08061640C	1.475,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

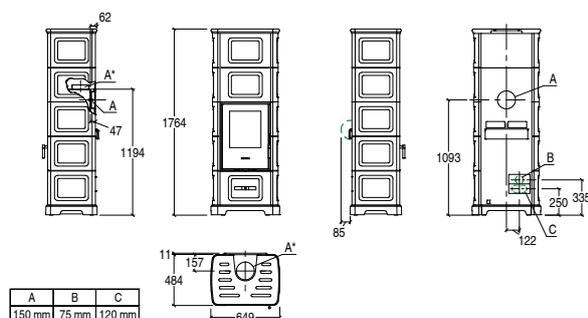

Dimensions in mm.

WOOD-BURNING STOVES

E928 C-M Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E928 C-M BCS
• Type		SL32-01
• Room heating capacity (min - max)	m ³	185 - 320
• Nominal heat output (min - max)	kW	5,5 - 11,1
• Nominal thermal efficiency (min - max)	%	84,8 - 86,6
• Nominal consumption (min - max)	kg/h	1,4 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	290
• Weight incl. HSS	kg	452
• PM _{nom} (13% O ₂)	mg/Nm ³	8
• OGC _{nom} (13% O ₂)	mg/Nm ³	25



VERSION	- WITH FRONT AIR VENT	CODE	EURO
TOTAL PRICE			6.260,00
Cladding	BIANCO	P06165300C	2.185,00
	BIANCO GRIGIO	P06165410C	2.185,00
	CANAPA	P06165350C	2.185,00
	KAKI	P06165990C	2.185,00
	ROSSO LAVA	P06165450C	2.185,00
VERDE MIRTO	P06165250C	2.185,00	
Stove	E928 C Hermetic Burn Control System	P07928300C	4.075,00
Accessories on request			
Multifuoco System Plus single		P08020700C	470,00
Heat Storage System (HSS) kit		P08061640C	1.475,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

VERSION	- WITHOUT FRONT AIR VENT	CODE	EURO
TOTAL PRICE			6.260,00
Cladding	BIANCO	P06160300C	2.185,00
	BIANCO GRIGIO	P06160410C	2.185,00
	CANAPA	P06160350C	2.185,00
	KAKI	P06160990C	2.185,00
	ROSSO LAVA	P06160450C	2.185,00
VERDE MIRTO	P06160250C	2.185,00	
Stove	E928 C Hermetic Burn Control System	P07928300C	4.075,00
Accessories on request			
Multifuoco System Plus single		P08020700C	470,00
Heat Storage System (HSS) kit		P08061640C	1.475,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

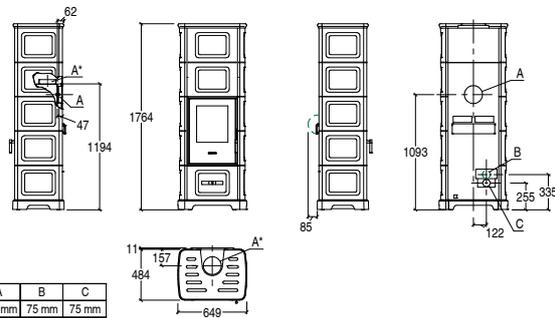

Dimensions in mm.

WOOD-BURNING STOVES

E928 D WITH OVEN



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Oven: stainless steel, with cooking grid and optional cooking vapour outlet valve
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928 R FORNO NEW
• Model		NEW
• Type		NEW
• Room heating capacity (min - max)	m ³	≥ 145 - ≥ 245
• Nominal heat output max	kW	≥ 8,5
• Nominal thermal efficiency	%	≥ 86 %
• Nominal consumption	kg/h	≥ 2 Kg/h
• Size of wood pieces	mm	? - ?
• Firebox opening W x H	mm	330 x 395
• Oven W x D x H	mm	290 x 290 x 290
• Weight	kg	≥ 200 Kg



		CODE	EURO
TOTAL STOVE			6.120,00
Cladding	BIANCO ANTICO	P06016640C	1.860,00
	ROSSO	P06016900C	1.860,00
	TERRA ORIENTE	P06016550C	1.860,00
Stove	E928 FORNO	P07009002C	4.260,00
Accessories on request			
	Multifuoco System® single	P08027900C	
	Multifuoco System Plus single	P08027910C	
	Combustion air kit	NEW	
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

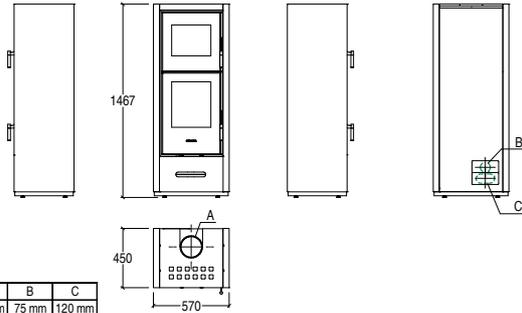

Dimensions in mm.

WOOD-BURNING STOVES

E928-H



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E928-H
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	280
• Weight incl. HSS	kg	524
• PM _{nom} (13% O ₂)	mg/Nm ³	12
• OGC _{nom} (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			5.230,00
Cladding	BIANCO	P06153300C	2.235,00
	NERO OPACO	P06153160C	2.235,00
	ROSSO LAVA	P06153450C	2.235,00
	TERRA COTTA	P06153090C	2.235,00
Stove	E928	P07928000C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Heat Storage System (HSS) kit	P08061620C	2.025,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

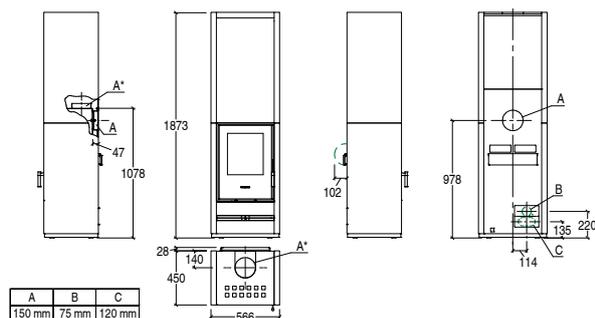

Dimensions in mm.

WOOD-BURNING STOVES

E928-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928-H BCS
• Model		SL32-01
• Type		185 - 320
• Room heating capacity (min - max)	m ³	5,5 - 11,1
• Nominal heat output (min - max)	kW	84,8 - 86,6
• Nominal thermal efficiency (min - max)	%	1,4 - 2,9
• Nominal consumption (min - max)	kg/h	370 - 400
• Size of wood pieces	mm	330 x 395
• Firebox opening W x H	mm	285
• Weight	kg	529
• Weight incl. HSS	kg	8
• PM ₁₀ (13% O ₂)	mg/Nm ³	25
• OGC _{nom} (13% O ₂)	mg/Nm ³	




CODE EURO

TOTAL PRICE		6.310,00	
Cladding	BIANCO	P06153300C	2.235,00
	NERO OPACO	P06153160C	2.235,00
	ROSSO LAVA	P06153450C	2.235,00
	TERRA COTTA	P06153090C	2.235,00

Stove	E928 Hermetic Burn Control System	P07928100C	4.075,00
-------	-----------------------------------	------------	----------

Accessories on request

Multifuoco System Plus single	P08020700C	470,00
Heat Storage System (HSS) kit	P08061620C	2.025,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

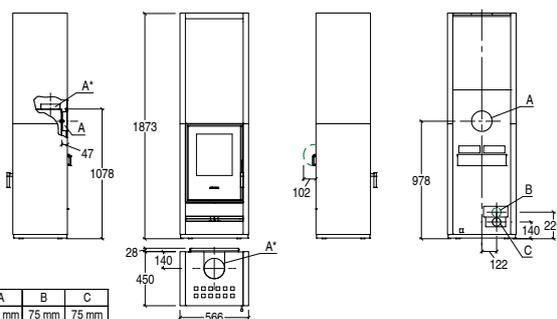

Dimensions in mm.

WOOD-BURNING STOVES

E928-M



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E928 M
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	250
• Weight incl. HSS	kg	337
• PM ₁₀ (13% O ₂)	mg/Nm ³	12
• OGC _{nom} (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			4.640,00
Cladding	BIANCO	P06152300C	1.645,00
	NERO OPACO	P06152160C	1.645,00
	ROSSO LAVA	P06152450C	1.645,00
	TERRA COTTA	P06152090C	1.645,00
Stove	E928	P07928000C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Heat Storage System (HSS) kit	P08061610C	775,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

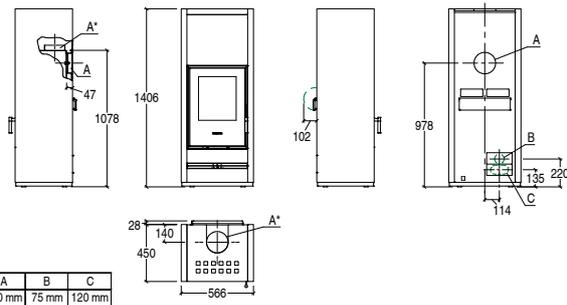

Dimensions in mm.

WOOD-BURNING STOVES

E928-M Hermetic BCS



GENERAL CHARACTERISTICS


- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928-M BCS
• Model		SL32-01
• Type		185 - 320
• Room heating capacity (min - max)	m ³	5,5 - 11,1
• Nominal heat output (min - max)	kW	84,8 - 86,6
• Nominal thermal efficiency (min - max)	%	1,4 - 2,9
• Nominal consumption (min - max)	kg/h	370 - 400
• Size of wood pieces	mm	330 x 395
• Firebox opening W x H	mm	255
• Weight	kg	342
• Weight incl. HSS	kg	8
• PM _{nom} (13% O ₂)	mg/Nm ³	25
• OGC _{nom} (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			5.720,00
Cladding	BIANCO	P06152300C	1.645,00
	NERO OPACO	P06152160C	1.645,00
	ROSSO LAVA	P06152450C	1.645,00
	TERRA COTTA	P06152090C	1.645,00
Stove	E928 Hermetic Burn Control System	P07928100C	4.075,00
Accessories on request			
	Multifuoco System Plus single	P08020700C	470,00
	Heat Storage System (HSS) kit	P08061610C	775,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

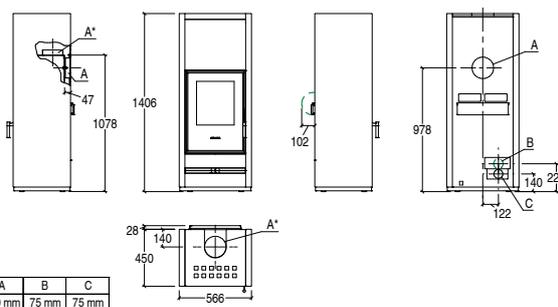

Dimensions in mm.

WOOD-BURNING STOVES

E928 R



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928 R
• Model		SL31-01A
• Type		185 - 315
• Room heating capacity (min - max)	m ³	5,5 - 11,0
• Nominal heat output (min - max)	kW	83 - 86
• Nominal thermal efficiency (min - max)	%	1,51 - 2,93
• Nominal consumption (min - max)	kg/h	370 - 400
• Size of wood pieces	mm	330 x 395
• Firebox opening W x H	mm	223
• Weight	kg	12
• PMnom (13% O ₂)	mg/Nm ³	35
• OGCnom (13% O ₂)	mg/Nm ³	



		CODE	EURO
TOTAL PRICE			4.355,00
Cladding	BIANCO	P06246300C	1.380,00
	CANAPA	P06246350C	1.380,00
	NERO OPACO	P06246160C	1.380,00
	VERDE MIRTO	P06246250C	1.380,00
TOTAL PRICE			4.440,00
Cladding	BIANCO GRIGIO	P06246410C	1.465,00
	ROSSO LAVA	P06246450C	1.465,00
Stove	E928 R	P07928400C	2.975,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

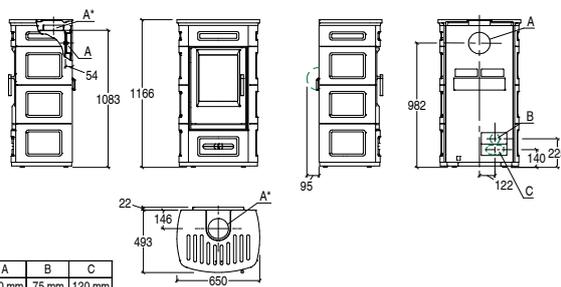

Dimensions in mm.

WOOD-BURNING STOVES

E928 R WITH OVEN



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Oven: stainless steel, with cooking grid and optional cooking vapour outlet valve
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928 R FORNO NEW
• Model		E928 R FORNO NEW
• Type		NEW
• Room heating capacity (min - max)	m ³	≥ 145 - ≥ 245
• Nominal heat output max	kW	≥ 8,5
• Nominal thermal efficiency	%	≥ 86 %
• Nominal consumption	kg/h	≥ 2 Kg/h
• Size of wood pieces	mm	? - ?
• Firebox opening W x H	mm	330 x 395
• Oven W x D x H	mm	290 x 290 x 290
• Weight	kg	≥ 200 Kg



	CODE	EURO
TOTAL STOVE		
Cladding	BIANCO	P06254300C
	BIANCO GRIGIO	P06254410C
	CANAPA	P06254350C
	NERO OPACO	P06254160C
	ROSSO LAVA	P06254450C
	VERDE MIRTO	P06254250C
Stove	E928 FORNO	P07928900C
Accessories on request		
Multifuoco System® single		P08027900C
Multifuoco System Plus single		P08027910C
Combustion air kit		NEW
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

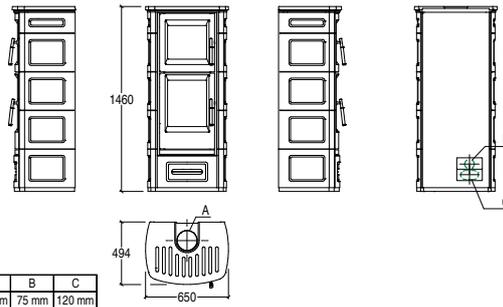

Dimensions in mm.

WOOD-BURNING STOVES

E928 STEEL



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E928 ST
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	190
• PM _{nom} (13% O ₂)	mg/Nm ³	12
• OG _{Cnom} (13% O ₂)	mg/Nm ³	35

Data obtained in the configuration with upper flue outlet.



	CODE	EURO
TOTAL PRICE		3.495,00
Firebox with cladding	BIANCO with Nero front panels	P07282900C 3.495,00
	COR-TEN with Nero front panels	P07282920C 3.495,00
	NERO with Nero front panels	P07282910C 3.495,00
Accessories on request		
Multifuoco System® single	P08020410C	745,00
Multifuoco System Plus single	P08020500C	920,00
Combustion air kit	P08061410C	190,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

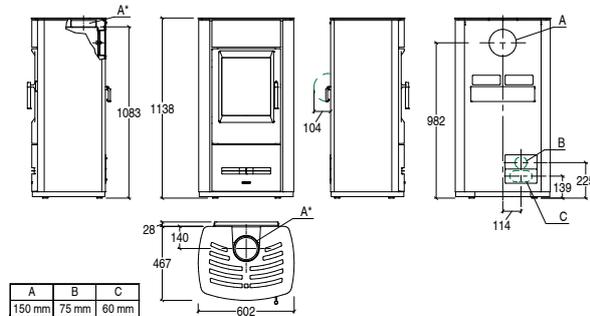

Dimensions in mm.

WOOD-BURNING STOVES

E928 STEEL WITH OVEN



		CODE	EURO
TOTAL STOVE			
Cladding	BIANCO	P19928100C	
	COR-TEN	P19928200C	
	NERO	P19928300C	
Stove	E928 STEEL FORNO	P07928900C	
Accessories on request			
	Multifuoco System® single	P08027900C	
	Multifuoco System Plus single	P08027910C	
	Combustion air kit	NEW	
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)


GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Oven: stainless steel, with cooking grid and optional cooking vapour outlet valve
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E928 R FORNO
• Model		NEW
• Type		NEW
• Room heating capacity (min - max)	m ³	≥ 145 - ≥ 245
• Nominal heat output (min - max)	kW	≥ 8,5
• Nominal thermal efficiency (min - max)	%	≥ 86 %
• Nominal consumption (min - max)	kg/h	≥ 2 Kg/h
• Size of wood pieces	mm	? - ?
• Firebox opening W x H	mm	330 x 395
• Oven W x D x H	mm	290 x 290 x 290
• Weight	kg	≥ 200 Kg

Data obtained in the configuration with upper flue outlet.

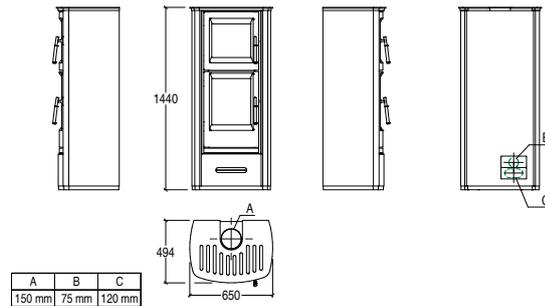

Dimensions in mm.



WOOD-BURNING STOVES

E928 S with food warmer



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E928 S
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	260
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			5.015,00
Cladding	BIANCO	P06155300C	2.020,00
	NERO OPACO	P06155160C	2.020,00
	ROSSO LAVA	P06155450C	2.020,00
	TERRA COTTA	P06155090C	2.020,00
Stove	E928	P07928000C	2.995,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

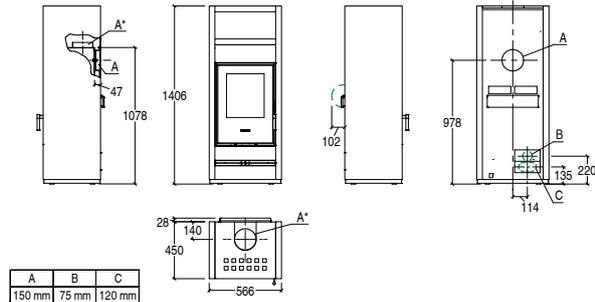

Dimensions in mm.

WOOD-BURNING STOVES

E928 S Hermetic BCS with food warmer



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E928 S BCS
• Type		SL32-01
• Room heating capacity (min - max)	m ³	185 - 320
• Nominal heat output (min - max)	kW	5,5 - 11,1
• Nominal thermal efficiency (min - max)	%	84,8 - 86,6
• Nominal consumption (min - max)	kg/h	1,4 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	265
• PMnom (13% O ₂)	mg/Nm ³	8
• OGCnom (13% O ₂)	mg/Nm ³	25




CODE EURO

TOTAL PRICE			6.095,00
Cladding	BIANCO	P06155300C	2.020,00
	NERO OPACO	P06155160C	2.020,00
	ROSSO LAVA	P06155450C	2.020,00
	TERRA COTTA	P06155090C	2.020,00

Stove	E928 Hermetic Burn Control System	P07928100C	4.075,00
-------	-----------------------------------	------------	----------

Accessories on request

Multifuoco System Plus single	P08020700C	470,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

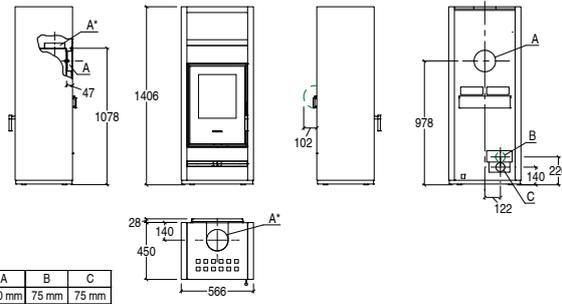

Dimensions in mm.

WOOD-BURNING STOVES

E929 C Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS accumulation: optional
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


• Model		E929 C
• Type		SL310-04
• Room heating capacity (min - max)	m ³	135 - 230
• Nominal heat output max	kW	7,9
• Nominal thermal efficiency	%	85,7
• Nominal consumption	kg/h	2,2
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	183
• Weight incl. HSS	kg	233
• PMnom (13% O ₂)	mg/Nm ³	11
• OGCnom (13% O ₂)	mg/Nm ³	30

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- WITH FRONT VENT AND REAR KNOCK OUT HOLES - COMBUSTION AIR KIT, STANDARD		
TOTAL PRICE			4.910,00
Cladding	BIANCO	P06132300C	2.210,00
	BORDEAUX	P06132420C	2.210,00
	CANAPA	P06132350C	2.210,00
TOTAL PRICE			5.375,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06132111C	2.675,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06132321C	2.675,00
Stove	E929 Ermetica	P07929001C	2.700,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019020C	565,00
	Convective hot air adjustment kit	P08060740C	340,00
	Rear hot air ducting union kit	P08060800C	80,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- WITHOUT FRONT VENT AND ANY REAR KNOCK OUT HOLES - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			4.910,00
Cladding	BIANCO	P06137300C	2.210,00
	BORDEAUX	P06137420C	2.210,00
	CANAPA	P06137350C	2.210,00
TOTAL PRICE			5.375,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06137111C	2.675,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06137321C	2.675,00
Stove	E929 Ermetica	P07929001C	2.700,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019020C	565,00
	Convective hot air adjustment kit	P08060740C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

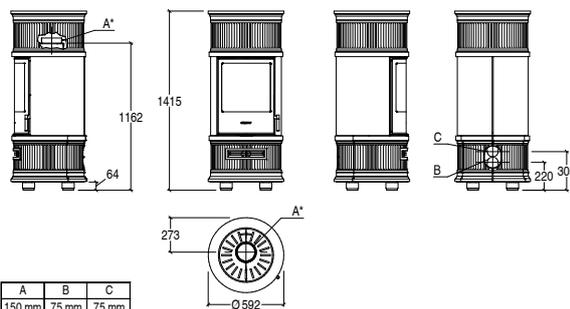

Dimensions in mm.

WOOD-BURNING STOVES

E929 C Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


• Model		E929 C BCS
• Type		SL311-03
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	183
• Weight incl. HSS	kg	233
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- WITH FRONT VENT AND REAR KNOCK OUT HOLES - COMBUSTION AIR KIT, STANDARD		
TOTAL PRICE			6.205,00
Cladding	BIANCO	P06132300C	2.210,00
	BORDEAUX	P06132420C	2.210,00
	CANAPA	P06132350C	2.210,00
TOTAL PRICE			6.670,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06132111C	2.675,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06132321C	2.675,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019020C	565,00
	Convective hot air adjustment kit	P08060740C	340,00
	Rear hot air ducting union kit	P08060800C	80,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- WITHOUT FRONT VENT AND ANY REAR KNOCK OUT HOLES - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			6.205,00
Cladding	BIANCO	P06137300C	2.210,00
	BORDEAUX	P06137420C	2.210,00
	CANAPA	P06137350C	2.210,00
TOTAL PRICE			6.670,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06137111C	2.675,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06137321C	2.675,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019020C	565,00
	Convective hot air adjustment kit	P08060740C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

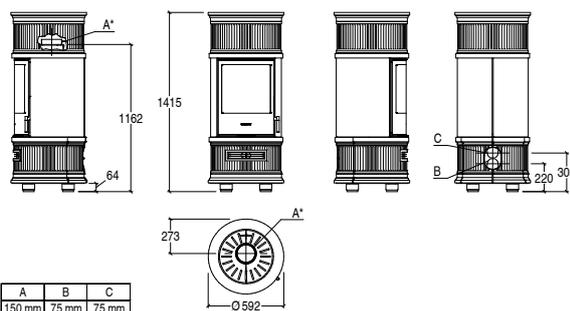

Dimensions in mm.

WOOD-BURNING STOVES

E929 C-H Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front air ventilation: directional air vent (only on ceramic versions with opening)
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS accumulation: optional
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA


• Model		E929 C-H
• Type		SL310-04
• Room heating capacity (min - max)	m³	135 - 230
• Nominal heat output max	kW	7,9
• Nominal thermal efficiency	%	85,7
• Nominal consumption	kg/h	2,2
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	206
• Weight incl. HSS	kg	422
• PMnom (13% O ₂)	mg/Nm³	11
• OGCnom (13% O ₂)	mg/Nm³	30

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
VERSION	- WITH FRONT VENT AND REAR KNOCK OUT HOLES - COMBUSTION AIR KIT, STANDARD		
TOTAL PRICE			5.410,00
Cladding	BIANCO	P06135300C	2.710,00
	BORDEAUX	P06135420C	2.710,00
	CANAPA	P06135350C	2.710,00
TOTAL PRICE			6.075,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06135111C	3.375,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06135321C	3.375,00
Stove	E929 Ermetica	P07929001C	2.700,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019050C	1.715,00
	Convective hot air adjustment kit	P08060740C	340,00
	Rear hot air ducting union kit	P08060800C	80,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

		CODE	EURO
VERSION	- WITHOUT FRONT VENT AND ANY REAR KNOCK OUT HOLES - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			5.410,00
Cladding	BIANCO	P06138300C	2.710,00
	BORDEAUX	P06138420C	2.710,00
	CANAPA	P06138350C	2.710,00
TOTAL PRICE			6.075,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06138111C	3.375,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06138321C	3.375,00
Stove	E929 Ermetica	P07929001C	2.700,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019050C	1.715,00
	Convective hot air adjustment kit	P08060740C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

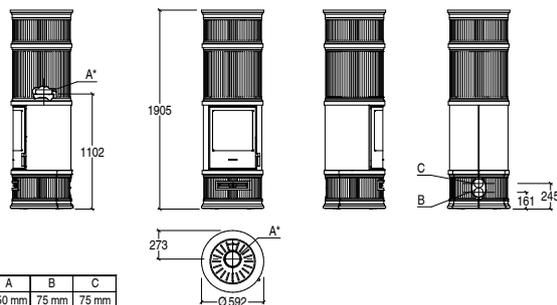

Dimensions in mm.

WOOD-BURNING STOVES

E929 C-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Outside air kit: standard
- Ash vacuum cleaner: optional
- Installation: room centre - wall - corner

TECHNICAL DATA

		E929 C-H BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	206
• Weight incl. HSS	kg	422
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.




		CODE	EURO
VERSION	- WITH FRONT VENT AND REAR KNOCK OUT HOLES - COMBUSTION AIR KIT, STANDARD		
TOTAL PRICE			6.705,00
Cladding	BIANCO	P06135300C	2.710,00
	BORDEAUX	P06135420C	2.710,00
	CANAPA	P06135350C	2.710,00
TOTAL PRICE			7.370,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06135111C	3.375,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06135321C	3.375,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00

Accessories on request			
Multifuoco System Plus single	P08027410C		470,00
Heat Storage System (HSS) kit	P08019050C		1.715,00
Convective hot air adjustment kit	P08060740C		340,00
Rear hot air ducting union kit	P08060800C		80,00
Log rack	P08061260C		65,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C		20,00 per linear metre

		CODE	EURO
VERSION	- WITHOUT FRONT VENT AND ANY REAR KNOCK OUT HOLES - OUTSIDE AIR KIT INCLUDED (WITH FLOOR LEVEL AIR INTAKE)		
TOTAL PRICE			6.705,00
Cladding	BIANCO	P06138300C	2.710,00
	BORDEAUX	P06138420C	2.710,00
	CANAPA	P06138350C	2.710,00

TOTAL PRICE			7.370,00
Cladding	BIANCO ANTICO DECORI BLU VERDEMARE	P06138111C	3.375,00
	BIANCO ANTICO DECORI TERRA BRUNA	P06138321C	3.375,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00

Accessories on request			
Multifuoco System Plus single	P08027410C		470,00
Heat Storage System (HSS) kit	P08019050C		1.715,00
Convective hot air adjustment kit	P08060740C		340,00
Log rack	P08061260C		65,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C		20,00 per linear metre

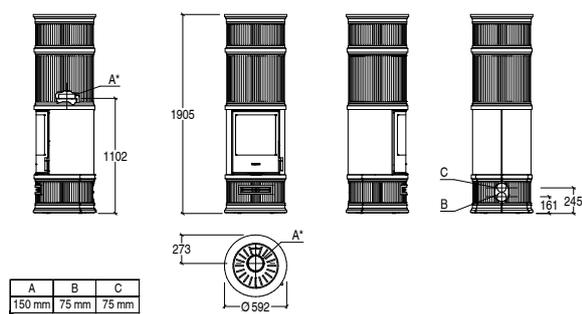

Dimensions in mm.

WOOD-BURNING STOVES

E929 D Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E929 D
• Model		SL310-04
• Type		135 - 230
• Room heating capacity (min - max)	m ³	7,9
• Nominal heat output max	kW	85,7
• Nominal thermal efficiency	%	2,2
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	164
• Weight	kg	11
• PMnom (13% O ₂)	mg/Nm ³	30
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			4.660,00
Cladding	ARDESIA	P06130240C	1.960,00
	BIANCO	P06130300C	1.960,00
	GIALLO ACCESO	P06130260C	1.960,00
	GRIGIO CERATO	P06130310C	1.960,00
	NERO OPACO	P06130160C	1.960,00
	ROSSO LAVA	P06130450C	1.960,00
Stove	E929 Ermetica	P07929001C	2.700,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

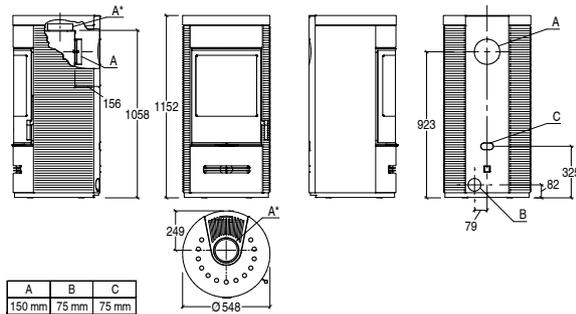

Dimensions in mm.

WOOD-BURNING STOVES

E929 D Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E929 D BCS
• Type		SL311-03
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	164
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



	CODE	EURO
TOTAL PRICE		5.955,00
Cladding	ARDESIA	P06130240C 1.960,00
	BIANCO	P06130300C 1.960,00
	GIALLO ACCESO	P06130260C 1.960,00
	GRIGIO CERATO	P06130310C 1.960,00
	NERO OPACO	P06130160C 1.960,00
	ROSSO LAVA	P06130450C 1.960,00
Stove	E929 Hermetic BCS	P07929600C 3.995,00
Accessories on request		
Multifuoco System Plus single	P08027410C	470,00
Log rack	P08061260C	65,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

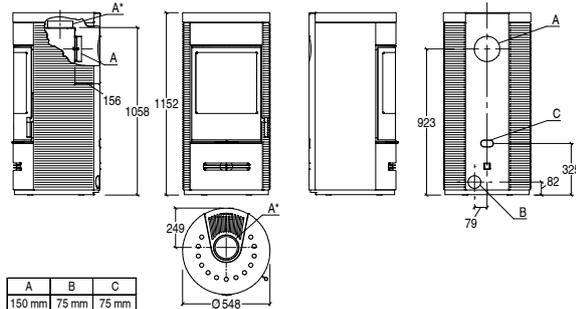

Dimensions in mm.

WOOD-BURNING STOVES

E929 D-H Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (rear flue not compatible with storage kit)
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E929 D-H
• Type		SL310-04
• Room heating capacity (min - max)	m ³	135 - 230
• Nominal heat output max	kW	7,9
• Nominal thermal efficiency	%	85,7
• Nominal consumption	kg/h	2,2
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	194
• Weight incl. HSS	kg	351
• PMnom (13% O ₂)	mg/Nm ³	11
• OGCnom (13% O ₂)	mg/Nm ³	30

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			5.070,00
Cladding	ARDESIA	P06133240C	1.865,00
	BIANCO	P06133300C	1.865,00
	GIALLO ACCESO	P06133260C	1.865,00
	GRIGIO CERATO	P06133310C	1.865,00
	NERO OPACO	P06133160C	1.865,00
	ROSSO LAVA	P06133450C	1.865,00
Stove	E929 Ermetica	P07929001C	2.700,00
Essential kit	Profile kits in painted steel	P08019190C	505,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019010C	1.200,00
	Convective hot air adjustment kit	P08060280C	440,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

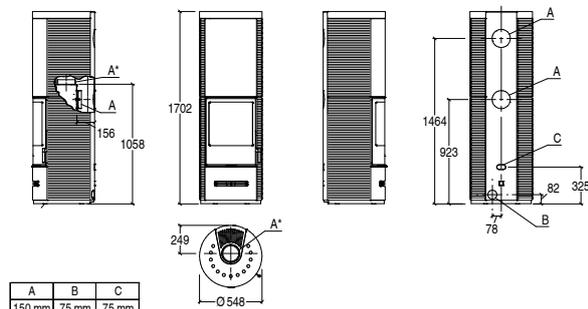

Dimensions in mm.

WOOD-BURNING STOVES

E929 D-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E929 D-H BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	7,7
• Nominal heat output max	kW	85,6
• Nominal thermal efficiency	%	2,1
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	194
• Weight	kg	351
• Weight incl. HSS	kg	9
• PMnom (13% O ₂)	mg/Nm ³	27
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			6.365,00
Cladding	ARDESIA	P06133240C	1.865,00
	BIANCO	P06133300C	1.865,00
	GIALLO ACCESO	P06133260C	1.865,00
	GRIGIO CERATO	P06133310C	1.865,00
	NERO OPACO	P06133160C	1.865,00
	ROSSO LAVA	P06133450C	1.865,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Essential kit	Profile kits in painted steel	P08019190C	505,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019010C	1.200,00
	Convective hot air adjustment kit	P08060280C	440,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

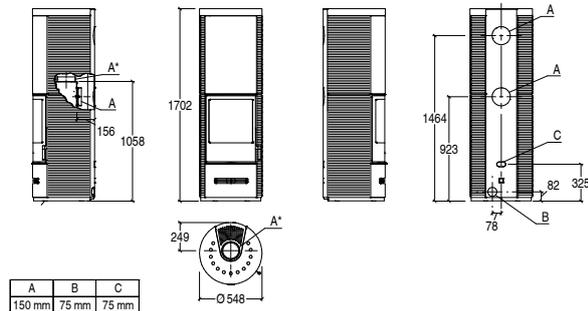

Dimensions in mm.

WOOD-BURNING STOVES

E929 M Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E929 M
• Type		SL310-04
• Room heating capacity (min - max)	m ³	135 - 230
• Nominal heat output max	kW	7,9
• Nominal thermal efficiency	%	85,7
• Nominal consumption	kg/h	2,2
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	163
• PMnom (13% O ₂)	mg/Nm ³	11
• OGCnom (13% O ₂)	mg/Nm ³	30

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			4.660,00
Cladding	ARDESIA	P06131240C	1.960,00
	BIANCO	P06131300C	1.960,00
	GIALLO ACCESO	P06131260C	1.960,00
	GRIGIO CERATO	P06131310C	1.960,00
	NERO OPACO	P06131160C	1.960,00
	ROSSO LAVA	P06131450C	1.960,00
Stove	E929 Ermetica	P07929001C	2.700,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

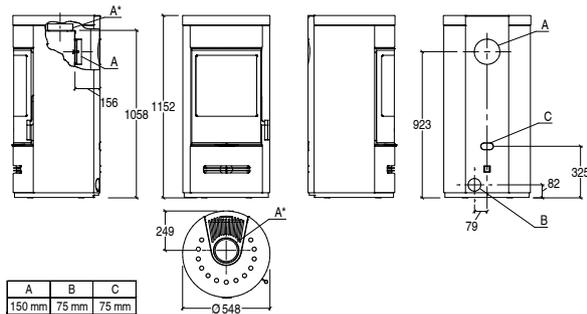

Dimensions in mm.

WOOD-BURNING STOVES

E929 M Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: stainless steel
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

• Model		E929 M BCS
• Type		SL311-03
• Room heating capacity (min - max)	m ³	130 - 220
• Nominal heat output max	kW	7,7
• Nominal thermal efficiency	%	85,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	163
• PMnom (13% O ₂)	mg/Nm ³	9
• OGCnom (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



	CODE	EURO
TOTAL PRICE		5.955,00
Cladding	ARDESIA	P06131240C 1.960,00
	BIANCO	P06131300C 1.960,00
	GIALLO ACCESO	P06131260C 1.960,00
	GRIGIO CERATO	P06131310C 1.960,00
	NERO OPACO	P06131160C 1.960,00
	ROSSO LAVA	P06131450C 1.960,00
Stove	E929 Hermetic BCS	P07929600C 3.995,00
Accessories on request		
Multifuoco System Plus single	P08027410C	470,00
Log rack	P08061260C	65,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

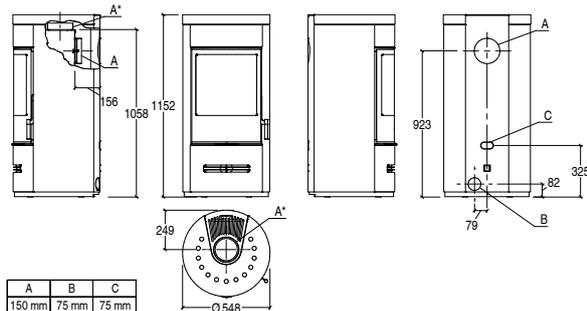

Dimensions in mm.

WOOD-BURNING STOVES

E929 M-H Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (rear flue not compatible with storage kit)
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E929 M-H
• Model		SL310-04
• Type		135 - 230
• Room heating capacity (min - max)	m ³	7,9
• Nominal heat output max	kW	85,7
• Nominal thermal efficiency	%	2,2
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	191
• Weight	kg	348
• Weight incl. HSS	kg	11
• PMnom (13% O ₂)	mg/Nm ³	30
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			5.070,00
Cladding	ARDESIA	P06134240C	1.865,00
	BIANCO	P06134300C	1.865,00
	GIALLO ACCESO	P06134260C	1.865,00
	GRIGIO CERATO	P06134310C	1.865,00
	NERO OPACO	P06134160C	1.865,00
	ROSSO LAVA	P06134450C	1.865,00
Stove	E929 Ermetica	P07929001C	2.700,00
Essential kit	Profile kits in painted steel	P08019190C	505,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019010C	1.200,00
	Convective hot air adjustment kit	P08060280C	440,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

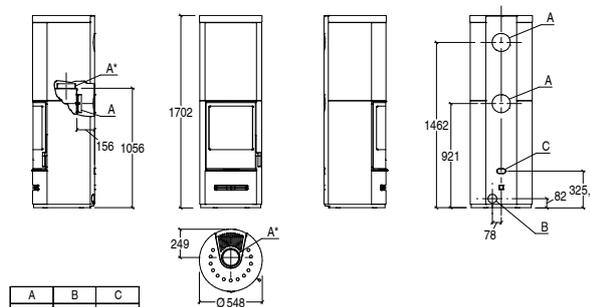

Dimensions in mm.

WOOD-BURNING STOVES

E929 M-H Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E929 M-H BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	7,7
• Nominal heat output max	kW	85,6
• Nominal thermal efficiency	%	2,1
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	191
• Weight	kg	348
• Weight incl. HSS	kg	9
• PMnom (13% O ₂)	mg/Nm ³	27
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			6.365,00
Cladding	ARDESIA	P06134240C	1.865,00
	BIANCO	P06134300C	1.865,00
	GIALLO ACCESO	P06134260C	1.865,00
	GRIGIO CERATO	P06134310C	1.865,00
	NERO OPACO	P06134160C	1.865,00
	ROSSO LAVA	P06134450C	1.865,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Essential kit	Profile kits in painted steel	P08019190C	505,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019010C	1.200,00
	Convective hot air adjustment kit	P08060280C	440,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

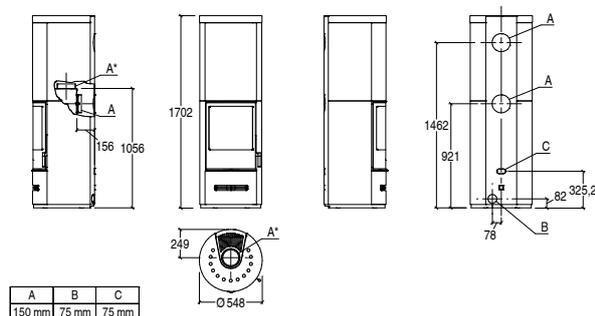

Dimensions in mm.

WOOD-BURNING STOVES

E929 T Hermetic



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (rear flue not compatible with storage kit)
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E929 T
• Model		SL310-04
• Type		135 - 230
• Room heating capacity (min - max)	m ³	7,9
• Nominal heat output max	kW	85,7
• Nominal thermal efficiency	%	2,2
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	183
• Weight	kg	250
• Weight incl. HSS	kg	11
• PMnom (13% O ₂)	mg/Nm ³	30
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			4.915,00
Cladding	ARDESIA	P06136240C	1.710,00
	BIANCO	P06136300C	1.710,00
	GIALLO ACCESO	P06136260C	1.710,00
	GRIGIO CERATO	P06136310C	1.710,00
	NERO OPACO	P06136160C	1.710,00
	ROSSO LAVA	P06136450C	1.710,00
Stove	E929 Ermetica	P07929001C	2.700,00
Essential kit	Profile kits in painted steel	P08019200C	505,00
Accessories on request			
	Multifuoco System® single	P08027400C	745,00
	Multifuoco System Plus single	P08027420C	920,00
	Heat Storage System (HSS) kit	P08019030C	705,00
	Convective hot air adjustment kit	P08060290C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

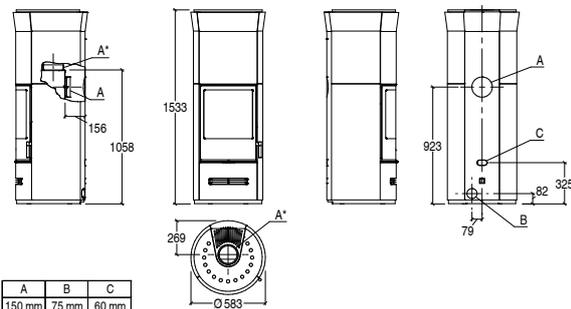

Dimensions in mm.

WOOD-BURNING STOVES

E929 T Hermetic BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / HSS heat storage system / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS accumulation: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

		E929 T BCS
• Model		SL311-03
• Type		130 - 220
• Room heating capacity (min - max)	m ³	7,7
• Nominal heat output max	kW	85,6
• Nominal thermal efficiency	%	2,1
• Nominal consumption	kg/h	300 - 330
• Size of wood pieces	mm	290 x 400
• Firebox opening W x H	mm	183
• Weight	kg	250
• Weight incl. HSS	kg	9
• PMnom (13% O ₂)	mg/Nm ³	27
• OGCnom (13% O ₂)	mg/Nm ³	

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 50 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



		CODE	EURO
TOTAL PRICE			6.210,00
Cladding	ARDESIA	P06136240C	1.710,00
	BIANCO	P06136300C	1.710,00
	GIALLO ACCESO	P06136260C	1.710,00
	GRIGIO CERATO	P06136310C	1.710,00
	NERO OPACO	P06136160C	1.710,00
	ROSSO LAVA	P06136450C	1.710,00
Stove	E929 Hermetic BCS	P07929600C	3.995,00
Essential kit	Profile kits in painted steel	P08019200C	505,00
Accessories on request			
	Multifuoco System Plus single	P08027410C	470,00
	Heat Storage System (HSS) kit	P08019030C	705,00
	Convective hot air adjustment kit	P08060290C	340,00
	Log rack	P08061260C	65,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

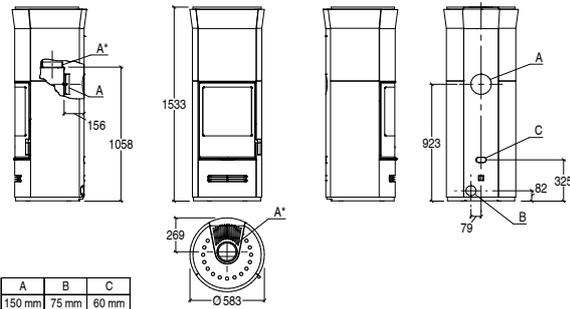

Dimensions in mm.

WOOD-BURNING STOVES

E940 C-F WITH OVEN



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Oven: stainless steel, with cooking grid and optional cooking vapour outlet valve
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		E940 C-F
• Type		NEW - Clone
• Room heating capacity (min - max)	m ³	≥ 185 - ≥ 315
• Nominal heat output max	kW	≥ 11
• Nominal thermal efficiency	%	≥ 86 %
• Nominal consumption	kg/h	≥ 3
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	390 x 270
• Weight	kg	≥ 300 Kg
• PMnom (13% O ₂)	mg/Nm ³	?
• OGCnom (13% O ₂)	mg/Nm ³	?



	CODE	EURO
TOTAL STOVE		
	BIANCO	P06247300C
	BIANCO GRIGIO	P06247410C
Cladding	CANAPA	P06247350C
	NERO OPACO	P06247160C
	ROSSO LAVA	P06247450C
	VERDE MIRTO	P06247250C
	Stove	E940 FORNO
Accessories on request		
	Multifuoco System® single	P08027870C
	Multifuoco System Plus single	P08027880C
	Combustion air kit	NEW
	Flexible pipe Ø 12 cm for combustion air	P08010360
		35,00 per pack (3 metres)

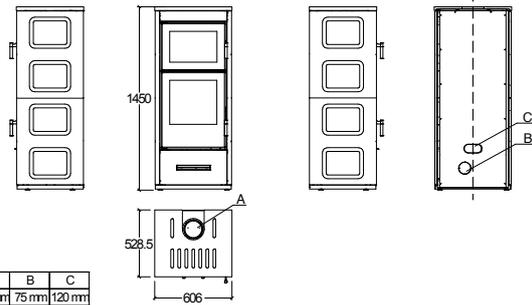

Dimensions in mm.

WOOD-BURNING STOVES

E940 F WITH OVEN



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Oven: stainless steel, with cooking grid and optional cooking vapour outlet valve
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

		E940 F NEW - Clone
• Model		≥ 185 - ≥ 315
• Type		≥ 11
• Room heating capacity (min - max)	m ³	≥ 86 %
• Nominal heat output max	kW	≥ 3
• Nominal thermal efficiency	%	400 - 430
• Nominal consumption	kg/h	390 x 270
• Size of wood pieces	mm	≥ 300 Kg
• Firebox opening W x H	mm	?
• Weight	kg	?
• PMnom (13% O ₂)	mg/Nm ³	?
• OGCnom (13% O ₂)	mg/Nm ³	?



	CODE	EURO
TOTAL STOVE		
Cladding	ARDESIA	P06248240C
	BIANCO	P06248300C
	BIANCO GRIGIO	P06248410C
	NERO OPACO	P06248160C
	ROSSO LAVA	P06248450C
	TERRA COTTA	P06248090C
Stove	E940 FORNO	P07040010C
Accessories on request		
Multifuoco System® single		P08027870C
Multifuoco System Plus single		P08027880C
Combustion air kit		NEW
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

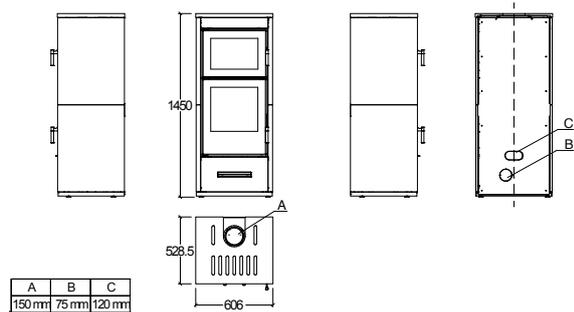

Dimensions in mm.

WOOD-BURNING STOVES


E940 F STEEL WITH OVEN



		CODE	EURO
TOTAL STOVE			
Cladding	BIANCO	P19940100C	
	COR-TEN	P19940200C	
	NERO	P19940300C	
Stove	E940 FORNO	P07040010C	
Accessories on request			
	Multifuoco System® single	P08027870C	
	Multifuoco System Plus single	P08027880C	
	Combustion air kit	NEW	
	Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: steel / steel
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Oven: stainless steel, with cooking grid and optional cooking vapour outlet valve
- Standard flue outlet position: top or rear
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

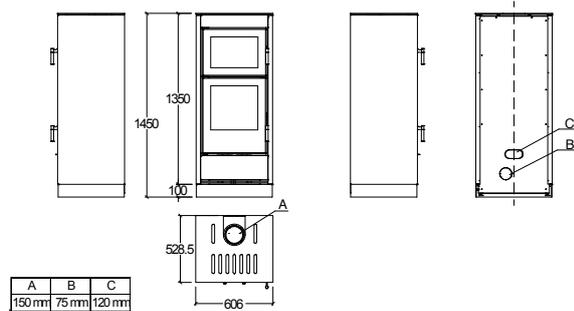

Dimensions in mm.

TECHNICAL DATA

		E940 F STEEL NEW - Clone
• Model		E940 F STEEL
• Type		NEW - Clone
• Room heating capacity (min - max)	m ³	≥ 185 - ≥ 315
• Nominal heat output max	kW	≥ 11
• Nominal thermal efficiency	%	≥ 86 %
• Nominal consumption	kg/h	≥ 3
• Size of wood pieces	mm	400 - 430
• Firebox opening W x H	mm	390 x 270
• Weight	kg	≥ 300 Kg
• PMnom (13% O ₂)	mg/Nm ³	?
• OGCnom (13% O ₂)	mg/Nm ³	?



Trend LINE

WOOD-BURNING STOVES Trend Line

E124	Hermetic218
E124	Hermetic BCS219
E124 A	Hermetic220
E124 A	Hermetic BCS221
E128	222
E128	Hermetic BCS223
E128 A	224
E128 A	Hermetic BCS225
E129 M	Hermetic226
E129 M	Hermetic BCS227

Accessories228
-------------	-----------	------

WOOD-BURNING STOVES TrendLINE

E124 Hermetic




CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		3.205,00
Firebox with cladding	BIANCO OPACO	P07240010C
	NERO OPACO	P07240020C
Accessories on request		
Heat Storage System (HSS) kit	P08060130C	445,00
Rear flue kit	P08060180C	115,00
Humidifier	N08019034C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Optional flue outlet: rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

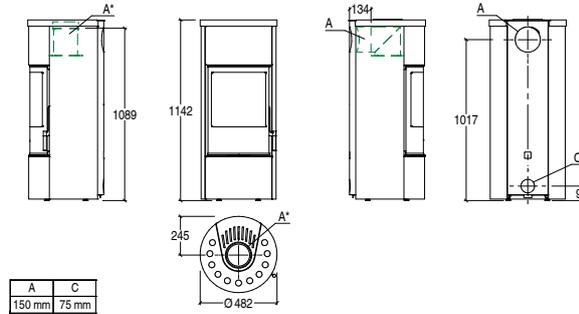

Dimensions in mm.

TECHNICAL DATA

• Model		E124
• Type		SL300-03A
• Room heating capacity (min - max)	m³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	150
• Weight incl. HSS	kg	199
• PMnom (13% O ₂)	mg/Nm³	10
• OGCnom (13% O ₂)	mg/Nm³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



WOOD-BURNING STOVES TrendLINE

E124 Hermetic BCS




CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE	3.770,00	
Firebox with cladding	BIANCO OPACO	P07240110C
	NERO OPACO	P07240120C
Accessories on request		
Heat Storage System (HSS) kit	P08060130C	445,00
Rear flue kit	P08060180C	115,00
Humidifier	N08019034C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

GENERAL CHARACTERISTICS

- Heating: optional HSS heat storage system / Natural convection
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Optional flue outlet: rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

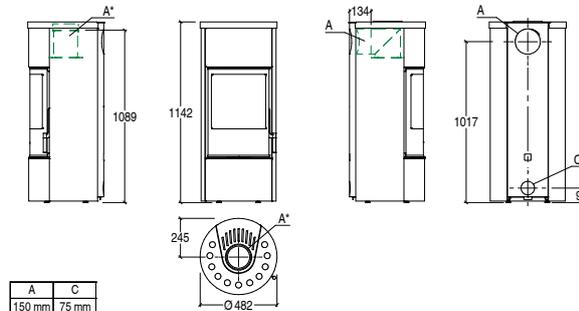

Dimensions in mm.

TECHNICAL DATA

• Model		E124 BCS
• Type		SL301-03A
• Room heating capacity (min - max)	m³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	150
• Weight incl. HSS	kg	199
• PMnom (13% O ₂)	mg/Nm³	10
• OGCnom (13% O ₂)	mg/Nm³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



WOOD-BURNING STOVES TrendLINE

E124 A Hermetic




CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE	3.335,00	
Firebox with cladding	BIANCO OPACO	P07241010C
	NERO OPACO	P07241020C
Accessories on request		
Humidifier	N08019034C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

GENERAL CHARACTERISTICS

- Heating: natural convection
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

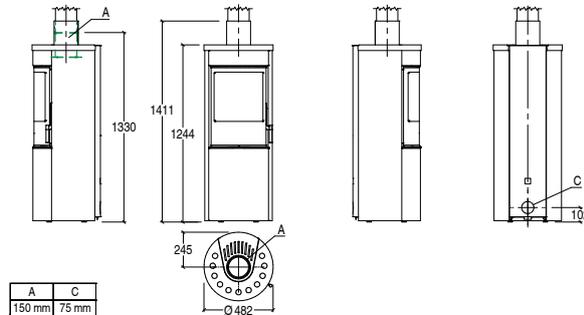

Dimensions in mm.

TECHNICAL DATA

• Model		E124 A
• Type		SL300-03A
• Room heating capacity (min - max)	m ³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	115
• PMnom (13% O ₂)	mg/Nm ³	10
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



WOOD-BURNING STOVES TrendLINE

E124 A Hermetic BCS




CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE	3.805,00	
Firebox with cladding	BIANCO OPACO	P07241110C
	NERO OPACO	P07241120C
Accessories on request		
Humidifier	N08019034C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

GENERAL CHARACTERISTICS

- Heating: natural convection
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner

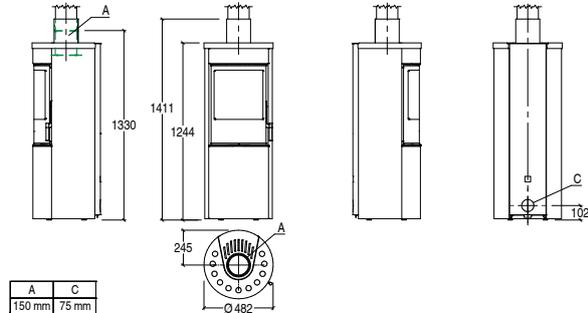

Dimensions in mm.

TECHNICAL DATA

• Model		E124 A BCS
• Type		SL301-03A
• Room heating capacity (min - max)	m³	120 - 210
• Nominal heat output max	kW	7,2
• Nominal thermal efficiency	%	85
• Nominal consumption	kg/h	1,95
• Size of wood pieces	mm	270 - 300
• Firebox opening W x H	mm	225 x 345
• Weight	kg	115
• PMnom (13% O ₂)	mg/Nm³	10
• OGCnom (13% O ₂)	mg/Nm³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



WOOD-BURNING STOVES TrendLINE

E128



GENERAL CHARACTERISTICS

- Multifuoco System®: 4 speed levels, manually or automatically controlled
- Heating: optional HSS heat storage system / Natural convection / Ductable forced ventilation
- Front ventilation: adjustable air vent in the version with Multifuoco System®
- Cladding / Top surface: steel / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

Natural convection version

• Model		E128
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output max	kW	11,0
• Nominal thermal efficiency	%	86
• Nominal consumption	kg/h	2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	208
• Weight incl. HSS	kg	253
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35

Standard on versions with MULTIFUOCO SYSTEM® or SYSTEM® PLUS

• Model		E128
• Type		SL31-03A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output max	kW	11,0
• Nominal thermal efficiency	%	87
• Nominal consumption	kg/h	2,87
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	208
• Weight incl. HSS	kg	253
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		3.550,00
Firebox with cladding	BIANCO OPACO	P07280010C
	NERO OPACO	P07280020C

CODE EURO


VERSION	STANDARD WITH MULTIFUOCO SYSTEM®	
TOTAL STOVE		4.285,00
Firebox with cladding	BIANCO OPACO	P07280310C
	NERO OPACO	P07280320C

CODE EURO

VERSION	STANDARD WITH MULTIFUOCO PLUS SYSTEM®	
TOTAL STOVE		4.480,00
Firebox with cladding	BIANCO OPACO	P07280410C
	NERO OPACO	P07280420C

Accessories on request

Heat Storage System (HSS) kit	P08061600C	390,00
Humidifier	N08019033C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

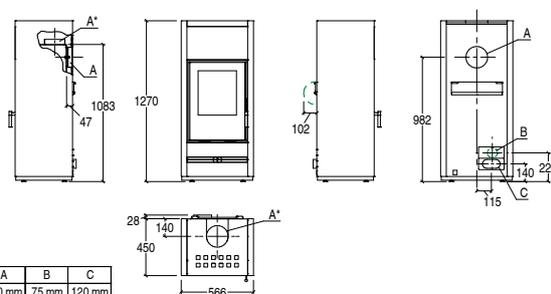

Dimensions in mm.

WOOD-BURNING STOVES TrendLINE

E128 Hermetic BCS



GENERAL CHARACTERISTICS

- Multifuoco System®: 4 speed levels, manually or automatically controlled
- Heating: optional HSS heat storage system / Natural convection / Ductable forced ventilation
- Front ventilation: adjustable air vent in the version with Multifuoco System®
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- HSS Storage: optional (only available on top flue version)
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

Natural convection version

• Model		E128 BCS
• Type		SL32-01
• Room heating capacity (min - max)	m ³	185 - 320
• Nominal heat output max	kW	11,1
• Nominal thermal efficiency	%	86,6
• Nominal consumption	kg/h	2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	232
• Weight incl. HSS	kg	262
• PMnom (13% O ₂)	mg/Nm ³	8
• OGCnom (13% O ₂)	mg/Nm ³	25


Standard on versions with MULTIFUOCO SYSTEM® or SYSTEM® PLUS

• Model		E128 BCS
• Type		SL32-03
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output max	kW	11,0
• Nominal thermal efficiency	%	87,2
• Nominal consumption	kg/h	2,8
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	236
• Weight incl. HSS	kg	262
• PMnom (13% O ₂)	mg/Nm ³	8
• OGCnom (13% O ₂)	mg/Nm ³	24

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



VERSION	NATURAL CONVECTION	CODE	EURO
TOTAL STOVE			4.500,00
Firebox with cladding	BIANCO OPACO	P07280110C	
	NERO OPACO	P07280120C	
VERSION	STANDARD WITH MULTIFUOCO PLUS SYSTEM®	CODE	EURO
TOTAL STOVE			5.010,00
Firebox with cladding	BIANCO OPACO	P07280210C	
	NERO OPACO	P07280220C	
Accessories on request			
Heat Storage System (HSS) kit		P08061600C	390,00
Humidifier		N08019033C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting		N08011060C	20,00 per linear metre

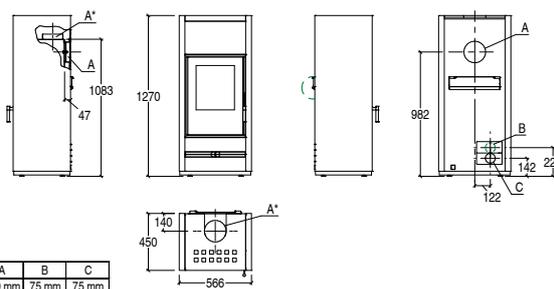

Dimensions in mm.

A	B	C
150 mm	75 mm	75 mm

E128 A



GENERAL CHARACTERISTICS

- Multifuoco System®: 4 speed levels, manually or automatically controlled
- Heating: Natural convection / Ductable forced ventilation
- Front ventilation: adjustable air vent in the version with Multifuoco System®
- Cladding / Top surface: steel / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

Natural convection version

• Model		E128 A
• Type		SL31-01A
• Room heating capacity (min - max)	m³	185 - 315
• Nominal heat output max	kW	11,0
• Nominal thermal efficiency	%	86
• Nominal consumption	kg/h	2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	220
• PMnom (13% O ₂)	mg/Nm³	12
• OGCnom (13% O ₂)	mg/Nm³	35

Standard on versions with MULTIFUOCO SYSTEM® or SYSTEM® PLUS

• Model		E128 A
• Type		SL31-03A
• Room heating capacity (min - max)	m³	185 - 315
• Nominal heat output max	kW	11,0
• Nominal thermal efficiency	%	87
• Nominal consumption	kg/h	2,87
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	220
• PMnom (13% O ₂)	mg/Nm³	12
• OGCnom (13% O ₂)	mg/Nm³	35

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		3.670,00
Firebox with cladding	BIANCO OPACO	P07281010C
	NERO OPACO	P07281020C

CODE EURO


VERSION	STANDARD WITH MULTIFUOCO SYSTEM®	
TOTAL STOVE		4.430,00
Firebox with cladding	BIANCO OPACO	P07281310C
	NERO OPACO	P07281320C

CODE EURO

VERSION	STANDARD WITH MULTIFUOCO PLUS SYSTEM®	
TOTAL STOVE		4.630,00
Firebox with cladding	BIANCO OPACO	P07281410C
	NERO OPACO	P07281420C

Accessories on request

Humidifier	N08019033C	35,00
Flexible pipe Ø 12 cm for combustion air	P08010360	35,00 per pack (3 metres)

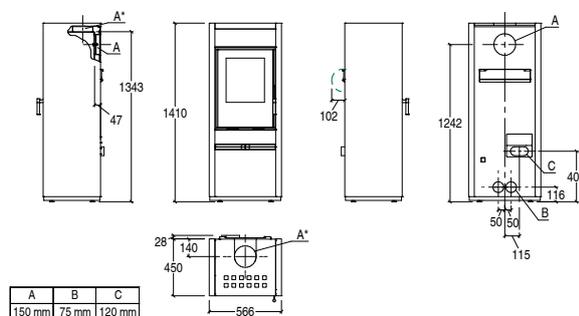

Dimensions in mm.

WOOD-BURNING STOVES TrendLINE

E128 A Hermetic BCS



GENERAL CHARACTERISTICS

- Multifuoco System®: 4 speed levels, manually or automatically controlled
- Heating: Natural convection / Ductable forced ventilation
- Front ventilation: adjustable air vent in the version with Multifuoco System®
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

Natural convection version

• Model		E128 A BCS
• Type		SL32-01
• Room heating capacity (min - max)	m³	185 - 320
• Nominal heat output max	kW	11,1
• Nominal thermal efficiency	%	86,6
• Nominal consumption	kg/h	2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	238
• PMnom (13% O ₂)	mg/Nm³	8
• OGCnom (13% O ₂)	mg/Nm³	25

Standard on versions with MULTIFUOCO SYSTEM® or SYSTEM® PLUS

• Model		E128 A BCS
• Type		SL32-03
• Room heating capacity (min - max)	m³	185 - 315
• Nominal heat output max	kW	11,0
• Nominal thermal efficiency	%	87,2
• Nominal consumption	kg/h	2,8
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	242
• PMnom (13% O ₂)	mg/Nm³	8
• OGCnom (13% O ₂)	mg/Nm³	24

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO


VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.635,00
Firebox with cladding	BIANCO OPACO	P07281110C
	NERO OPACO	P07281120C

CODE EURO

VERSION	STANDARD WITH MULTIFUOCO PLUS SYSTEM®	
TOTAL STOVE		5.170,00
Firebox with cladding	BIANCO OPACO	P07281210C
	NERO OPACO	P07281220C

Accessories on request

Humidifier	N08019033C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

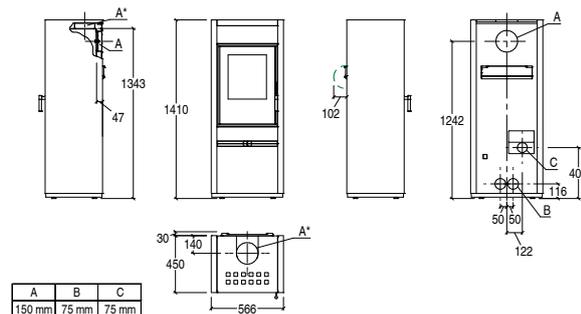

Dimensions in mm.

E129 M Hermetic BCS

GENERAL CHARACTERISTICS

- Multifuoco System®: 4 speed levels, manually or automatically controlled
- Heating: Natural convection / Ductable forced ventilation
- Front ventilation: adjustable air vent in the version with Multifuoco System®
- Cladding / Top surface: steel / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® - Skamolex / cast iron
- Door / Handle: steel with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- Humidifier: optional
- Glass cleaning: continuous air flow
- Pre-heated primary and secondary air: electronically controlled
- Pre-set tertiary air: pre-heated
- Burn Control System: yes
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA
Natural convection version

• Model		E129 M BCS
• Type		SL311-04
• Room heating capacity (min - max)	m ³	130 - 225
• Nominal heat output max	kW	7,8
• Nominal thermal efficiency	%	87,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	163
• PMnom (13% O ₂)	mg/Nm ³	5
• OGCnom (13% O ₂)	mg/Nm ³	27

Standard on versions with MULTIFUOCO SYSTEM® or SYSTEM® PLUS

• Model		E129 M BCS
• Type		SL311-08
• Room heating capacity (min - max)	m ³	130 - 225
• Nominal heat output max	kW	7,8
• Nominal thermal efficiency	%	87,6
• Nominal consumption	kg/h	2,1
• Size of wood pieces	mm	300 - 330
• Firebox opening W x H	mm	290 x 400
• Weight	kg	183
• PMnom (13% O ₂)	mg/Nm ³	5
• OGCnom (13% O ₂)	mg/Nm ³	27

Laboratory data obtained in the configuration with upper flue outlet and Piazzetta smoke duct, L 100 cm, for connection to the flue. The smoke duct is already included in the firebox package and is an integral part of the model.



CODE EURO


VERSION	NATURAL CONVECTION	CODE	EURO
TOTAL STOVE			4.295,00
Firebox with cladding	BIANCO OPACO	P07290110C	
	NERO OPACO	P07290120C	

CODE EURO

VERSION	STANDARD WITH MULTIFUOCO PLUS SYSTEM®	CODE	EURO
TOTAL STOVE			4.980,00
Firebox with cladding	BIANCO OPACO	P07290210C	
	NERO OPACO	P07290220C	

Accessories on request

Humidifier	N08019035C	35,00
Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

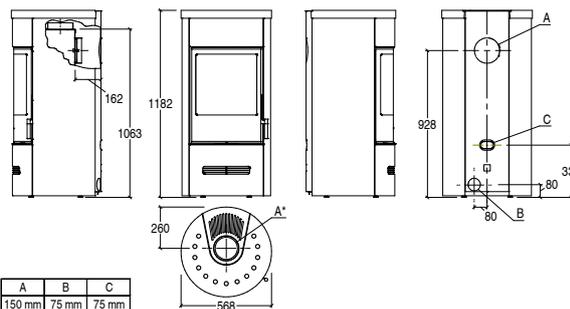

Dimensions in mm.

WOOD-BURNING STOVES - HERMETIC - BCS - WITH OVEN

Accessories

MULTIFUOCO SYSTEM®

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System®	E520 - E520 C - E520 STEEL	P08027800C	805,00
	E520 T STEEL	P08027810C	805,00
	E530 - E530 C - E530 STEEL	P08027820C	805,00
	E530 T STEEL	P08027830C	805,00
	Series E929 Hermetic - ROUND Hermetic	P08027400C	745,00
	Series E928	P08020410C	745,00
	E900 M	P08020170C	745,00

MULTIFUOCO SYSTEM PLUS

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System Plus	Series E929 Hermetic - ROUND Hermetic	P08027420C	920,00
	Series E929 Hermetic BCS - ROUND Hermetic BCS	P08027410C	470,00
	Series E928 Hermetic BCS	P08020700C	470,00
	Series E928	P08020500C	920,00
	E900 M	P08020510C	930,00

HSS HEAT STORAGE SYSTEM - HEAT EXTENDER SYSTEM - CONVECTIVE HOT AIR ADJUSTER KIT

ITEM	WEIGHT	COMPATIBLE MODELS	CODE	EURO
Heat Extender System	-	E520 - E520 C E520 STEEL - E520 T STEEL	P08063500C	645,00
	-	E530 - E530 C E530 STEEL - E530 T STEEL	P08063510C	645,00
	49 kg	CIRCLE Hermetic - CIRCLE Hermetic BCS E924 Hermetic - E924 Hermetic BCS E924 M Hermetic - E924 M Hermetic BCS E124 Hermetic - E124 Hermetic BCS	P08060130C	445,00
 HSS kit	115 kg	E924-H Hermetic - E924-H Hermetic BCS E924 A-H Hermetic - E924 A-H Hermetic BCS	P08060140C	730,00
	44 kg	E928 - E928 Hermetic BCS E128 - E128 Hermetic BCS	P08061600C	390,00
	60 kg	E928 C - E928 C Hermetic BCS	P08061630C	565,00
	300 kg	E928 C-H - E928 C-H Hermetic BCS	P08061650C	2.455,00
	162 kg	E928 C-M - E928 C-M Hermetic BCS	P08061640C	1.475,00
	244 kg	E928-H - E928-H Hermetic BCS	P08061620C	2.025,00
	87 kg	E928-M - E928-M Hermetic BCS	P08061610C	775,00
	50 kg	E929 C Hermetic - E929 C Hermetic BCS	P08019020C	565,00
	216 kg	E929 C-H Hermetic - E929 C-H Hermetic BCS	P08019050C	1.715,00
	157 kg	E929 D-H Hermetic - E929 D-H Hermetic BCS E929 M-H Hermetic - E929 M-H Hermetic BCS	P08019010C	1.200,00
 HSS kit	67 kg	E929 T Hermetic - E929 T Hermetic BCS	P08019030C	705,00
	34 kg	ROUND-M Hermetic - ROUND-M Hermetic BCS	P08019040C	565,00
	133 kg	ROUND-H Hermetic - ROUND-H Hermetic BCS	P08019060C	1.060,00
	-	E929 D-H Hermetic - E929 D-H Hermetic BCS E929 M-H Hermetic - E929 M-H Hermetic BCS	P08060280C	440,00
	-	E929 T Hermetic - E929 T Hermetic BCS	P08060290C	340,00
	-	ROUND-M Hermetic - ROUND-M Hermetic BCS ROUND-H Hermetic - ROUND-H Hermetic BCS	P08060300C	340,00
	-	E929 C Hermetic - E929 C Hermetic BCS E929 C-H Hermetic - E929 C-H Hermetic BCS	P08060740C	340,00
 Convective hot air adjustment kit	-	E929 D-H Hermetic - E929 D-H Hermetic BCS E929 M-H Hermetic - E929 M-H Hermetic BCS	P08060280C	440,00
	-	E929 T Hermetic - E929 T Hermetic BCS	P08060290C	340,00
	-	ROUND-M Hermetic - ROUND-M Hermetic BCS ROUND-H Hermetic - ROUND-H Hermetic BCS	P08060300C	340,00
	-	E929 C Hermetic - E929 C Hermetic BCS E929 C-H Hermetic - E929 C-H Hermetic BCS	P08060740C	340,00

WOOD-BURNING STOVES - HERMETIC - BCS - WITH OVEN

Accessories



ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Rear hot air ducting union kit for E929 C - E929 C-H		1	P08060800C	80,00
 Rear air vent kit E928 C - E928 C-H - E928 C-M		1	P08061390C	240,00
 Aluminium Y connector for wood-burning stoves E520 - E530	Ø 7,5	10	N08011016	28,00
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 Aluminium Y connector for wood-burning stoves ^[2]	Ø 7,5	10	N08011006	30,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00

[1] Available in 30 meter roll, minimum order quantity: 1 meter.

[2] For connecting the Multifuoco System fan of all wood stove models to the flex pipe for ducting hot air. Can also be used for branching the hot air ducts.

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Air vent with closure, enamelled white	L 25 x H 12 Ø 7,5	10	N08011001	60,00
 Wall air vent with closure, enamelled white	L 25 x H 11 Ø 7,5	6	N08011002	85,00
 Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
 Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
 Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
 Air vent without closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00
 Air vent with closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00


ACCESSORIES FOR BURN CONTROL SYSTEM

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe for BCS connection	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 90° Aluminium bend connector for BCS	Ø 7,5	10	N08011007	30,00
 Clamp for BCS	Ø 7,5	50	N08011008	5,00
 Connector sleeve for BCS	Ø 7,5	50	N08011009	10,00
 Aeration grille with spring for wall hole Ø 6,0 - 7,5 cm	Ø 6,0 - 7,5 cm	1	N08010014	5,00

WOOD-BURNING STOVES - HERMETIC - BCS - WITH OVEN

Accessories

COMBUSTION AIR KIT AND ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Combustion air kit	Series E928	P08061410C	190,00
 Combustion air kit for cladding for rear flue outlet and non-rotating stove base	Series E924 Hermetic - Series E924 Hermetic BCS CIRCLE - E924-H - E924 A-H excluded	P08060200C	185,00
 Combustion air kit for cladding for upper flue outlet and rotating stove base	Series E924 Hermetic - Series E924 Hermetic BCS CIRCLE Hermetic - CIRCLE Hermetic BCS	P08060220C	90,00
 Wall combustion air pipe cover kit for non-rotating stove base	CIRCLE Hermetic - CIRCLE Hermetic BCS	P08060820C	95,00
 Flexible aluminium pipe Ø 7,5 cm for combustion air	All models excluded Series E928 - E128	N08011060C	20,00 per linear metre
 Flexible aluminium pipe Ø 12 cm for combustion air	Series E928 - E128	P08010360	35,00 per pack (3 metres)
 Aeration grille with spring for wall hole Ø 6,0 - 7,5 cm	All models excluded Series E928 - E128	N08010014	5,00
 Aeration grille with spring for wall hole Ø 12,0 - 15,0 cm	Series E928 - E128	N08010015	5,00

EXTERNAL AIR INTAKE GRILLE

ITEM	COMPATIBLE MODELS	CODE	EURO
 White painted adjustable external air intake grille 17,5 x 27,5 cm with manual control	All models	N08010007	40,00

OPTIONAL FLUE OUTLET KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Rear flue kit E124/E924/E924 M/CIRCLE	CIRCLE Hermetic - CIRCLE Hermetic BCS E924 Hermetic - E924 Hermetic BCS E924 M Hermetic - E924 M Hermetic BCS E124 Hermetic - E124 Hermetic BCS	P08060180C	115,00
 Rear hot air ducting union kit	E929 C Hermetic - E929 C Hermetic BCS E929 C-H Hermetic - E929 C-H Hermetic BCS	P08060800C	80,00

HUMIDIFIER

ITEM	COMPATIBLE MODELS	CODE	EURO
Humidifier for Trend Line series	Series E124	N08019034C	35,00
	Series E128	N08019033C	35,00
	Series E129	N08019035C	35,00


WOOD-BURNING STOVES - HERMETIC - BCS - WITH OVEN

Accessories

ASH VACUUM CLEANER

ITEM	COMPATIBLE MODELS	CODE	EURO
 Ash vacuum cleaner	All models	N08019040C	105,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
 Rectangular steel floor plate	All models	100x120	P08024300C	335,00
 Round edged steel floor plate	All models	100x120	P08024310C	335,00

For all models excluding E900 M CON FORNO

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	L 25	150	P08025020	52,00
	L 50	150	P08025050	72,00
	L 100	150	P08025080	112,00
	L 50	150	P08025100	92,00
	L 100	150	P08025140	132,00
	L 32 x H 32	150	P08025200	99,00
	L 25 x H 30	150	P08025230	92,00
	L 17 x H 17	150	P08025260	72,00
	L 70 x H 45	150	P08025170	204,00
		150	P08025290	16,00
		150	P08025350	52,00
		150	P08025320	40,00

WOOD-BURNING STOVES - HERMETIC - BCS - WITH OVEN

Accessories

For E900 M CON FORNO

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	L 25	180	P08025030	60,00
	L 50	180	P08025060	80,00
	L 100	180	P08025090	119,00
	L 50	180	P08025110	92,00
	L 100	180	P08025150	137,00
	L 32 x H 32	180	P08025210	112,00
	L 25 x H 30	180	P08025240	99,00
	L 17 x H 17	180	P08025270	80,00
	L 70 x H 45	180	P08025180	217,00
	-	180	P08025300	56,00
	-	180	P08025360	60,00
	-	180	P08025330	45,00

STUBOTTO - WOOD-BURNING

BRUNICO234
BRUNICO BCS235
CANAZEI236
CANAZEI BCS237
ORTISEI238
ORTISEI BCS239
STUBOTTO C240

Accessories241
-------------	-----------	------

STUBOTTO - WOOD-BURNING

BRUNICO



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		BRUNICO
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	272
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			5.575,00
Cladding	Dome, sides and surrounds Bianco	P15090300C	1.865,00
	Dome Bianco Antico, sides and surrounds Blu Verdemare	P15090113C	1.865,00
	Dome Bianco Antico, sides and surrounds Canapa	P15090353C	1.865,00
	Dome Bianco Antico, sides and surrounds Terra Bruna	P15090323C	1.865,00
	Dome Bianco Antico, sides and surrounds Verde Mirto	P15090253C	1.865,00
TOTAL PRICE			5.975,00
Cladding	Dome and sides Bianco Antico. Surrounds, side and dome decorations Blu Verdemare	P15090112C	2.265,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Canapa	P15090352C	2.265,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Terra Bruna	P15090322C	2.265,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Verde Mirto	P15090252C	2.265,00
Stove	Wood-burning firebox SL30	P07030010C	3.590,00
Essential kit	Top kit element (necessary for installation)	P08063690C	120,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360C	35,00 per pack (3 metres)

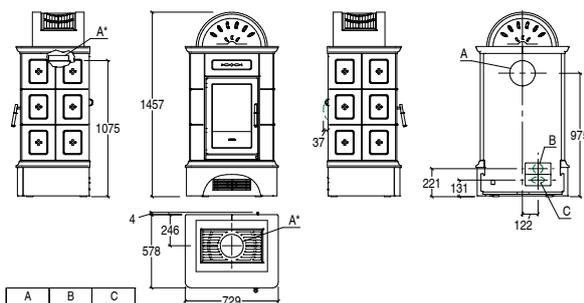

Dimensions in mm.

STUBOTTO - WOOD-BURNING

BRUNICO BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Glass cleaning: continuous air flow
- Primary and secondary air: electronically controlled - pre-heated
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Nominal thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Size of wood pieces mm
- Firebox opening W x H mm
- Weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

BRUNICO BCS	
Model	SL32-01
Type	185 - 320
Room heating capacity (min - max) m ³	5,5 - 11,1
Nominal heat output (min - max) kW	84,8 - 86,6
Nominal thermal efficiency (min - max) %	1,4 - 2,9
Nominal consumption (min - max) kg/h	370 - 400
Size of wood pieces mm	330 x 395
Firebox opening W x H mm	280
Weight kg	8
PMnom (13% O ₂) mg/Nm ³	25
OGCnom (13% O ₂) mg/Nm ³	



		CODE	EURO
TOTAL PRICE			6.660,00
Cladding	Dome, sides and surrounds Bianco	P15090300C	1.865,00
	Dome Bianco Antico, sides and surrounds Blu Verdemare	P15090113C	1.865,00
	Dome Bianco Antico, sides and surrounds Canapa	P15090353C	1.865,00
	Dome Bianco Antico, sides and surrounds Terra Bruna	P15090323C	1.865,00
	Dome Bianco Antico, sides and surrounds Verde Mirto	P15090253C	1.865,00
TOTAL PRICE			7.060,00
Cladding	Dome and sides Bianco Antico, Surrounds, side and dome decorations Blu Verdemare	P15090112C	2.265,00
	Dome and sides Bianco Antico, Surrounds, side and dome decorations Canapa	P15090352C	2.265,00
	Dome and sides Bianco Antico, Surrounds, side and dome decorations Terra Bruna	P15090322C	2.265,00
	Dome and sides Bianco Antico, Surrounds, side and dome decorations Verde Mirto	P15090252C	2.265,00
Stove	Firebox SL30 Ermetico Burn Control System	P07030110C	4.675,00
Essential kit	Top kit element (necessary for installation)	P08063690C	120,00
Accessories on request			
	Multifuoco System Plus single	P08020700C	470,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

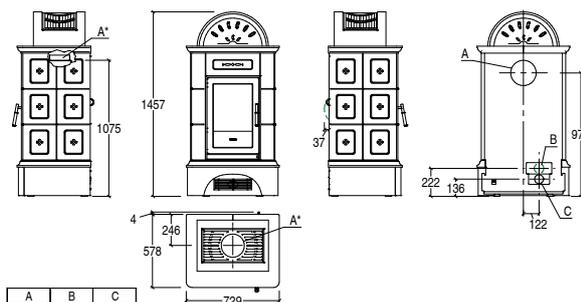

Dimensions in mm.

A	B	C
150 mm	75 mm	75 mm

STUBOTTO - WOOD-BURNING

CANAZEI



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		CANAZEI
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	288
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			5.785,00
Cladding	Dome, sides and surrounds Bianco	P15091300C	2.075,00
	Dome, sides and surrounds Blu Verdemare	P15091110C	2.075,00
	Dome, sides and surrounds Canapa	P15091350C	2.075,00
	Dome, sides and surrounds Terra Bruna	P15091320C	2.075,00
	Dome, sides and surrounds Verde Mirto	P15091250C	2.075,00
TOTAL PRICE			6.190,00
Cladding	Dome, sides and surrounds Bianco Antico. Side and dome decorations Blu Verdemare	P15091114C	2.480,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Canapa	P15091354C	2.480,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Terra Bruna	P15091324C	2.480,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verde Mirto	P15091254C	2.480,00
	Stove	Wood-burning firebox SL30	P07030010C
Essential kit	Top kit element (necessary for installation)	P08063700C	120,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360C	35,00 per pack (3 metres)

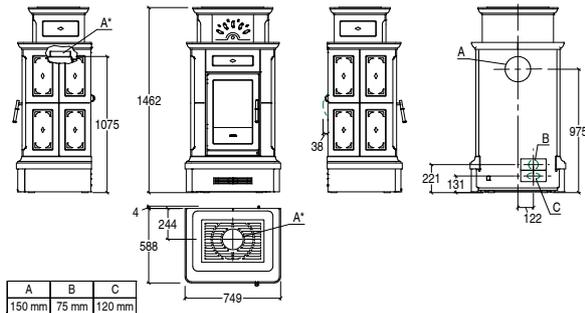

Dimensions in mm.

STUBOTTO - WOOD-BURNING

CANAZEI BCS



GENERAL CHARACTERISTICS


- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Glass cleaning: continuous air flow
- Primary and secondary air: electronically controlled - pre-heated
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		CANAZEI BCS
• Type		SL32-01
• Room heating capacity (min - max)	m ³	185 - 320
• Nominal heat output (min - max)	kW	5,5 - 11,1
• Nominal thermal efficiency (min - max)	%	84,8 - 86,6
• Nominal consumption (min - max)	kg/h	1,4 - 2,9
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	290
• PMnom (13% O ₂)	mg/Nm ³	8
• OGCnom (13% O ₂)	mg/Nm ³	25



		CODE	EURO
TOTAL PRICE			6.870,00
Cladding	Dome, sides and surrounds Bianco	P15091300C	2.075,00
	Dome, sides and surrounds Blu Verdemare	P15091110C	2.075,00
	Dome, sides and surrounds Canapa	P15091350C	2.075,00
	Dome, sides and surrounds Terra Bruna	P15091320C	2.075,00
	Dome, sides and surrounds Verde Mirto	P15091250C	2.075,00
TOTAL PRICE			7.275,00
Cladding	Dome, sides and surrounds Bianco Antico. Side and dome decorations Blu Verdemare	P15091114C	2.480,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Canapa	P15091354C	2.480,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Terra Bruna	P15091324C	2.480,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verde Mirto	P15091254C	2.480,00
	Stove	Firebox SL30 Ermetico Burn Control System	P07030110C
Essential kit	Top kit element (necessary for installation)	P08063700C	120,00
Accessories on request			
	Multifuoco System Plus single	P08020700C	470,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

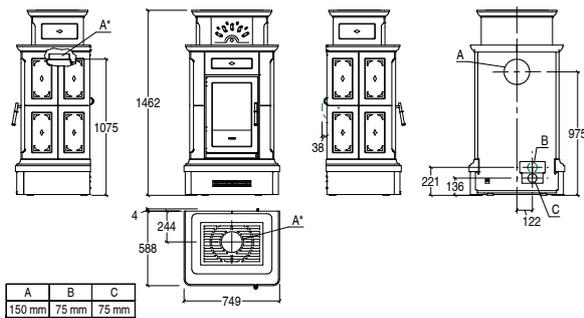

Dimensions in mm.

STUBOTTO - WOOD-BURNING

ORTISEI



GENERAL CHARACTERISTICS


- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Glass cleaning: continuous air flow
- Primary and secondary air: adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner

TECHNICAL DATA

• Model		ORTISEI
• Type		SL31-01A
• Room heating capacity (min - max)	m ³	185 - 315
• Nominal heat output (min - max)	kW	5,5 - 11,0
• Nominal thermal efficiency (min - max)	%	83 - 86
• Nominal consumption (min - max)	kg/h	1,51 - 2,93
• Size of wood pieces	mm	370 - 400
• Firebox opening W x H	mm	330 x 395
• Weight	kg	327
• PMnom (13% O ₂)	mg/Nm ³	12
• OGCnom (13% O ₂)	mg/Nm ³	35



		CODE	EURO
TOTAL PRICE			7.790,00
Cladding	Dome, sides and surrounds Bianco	P15092300C	2.905,00
	Dome, sides and surrounds Blu Verdemare	P15092110C	2.905,00
	Dome, sides and surrounds Canapa	P15092350C	2.905,00
	Dome, sides and surrounds Terra Bruna	P15092320C	2.905,00
	Dome, sides and surrounds Verde Mirto	P15092250C	2.905,00
TOTAL PRICE			8.210,00
Cladding	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verdemare	P15092114C	3.325,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Canapa	P15092354C	3.325,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Terra Bruna	P15092324C	3.325,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verde Mirto	P15092254C	3.325,00
	Stove	Wood-burning firebox SL30	P07030010C
Essential kit	Support kit (necessary for installation)	P08063710C	1.295,00
Accessories on request			
	Multifuoco System® single	P08020410C	745,00
	Multifuoco System Plus single	P08020500C	920,00
	Combustion air kit	P08061410C	190,00
	Flexible pipe Ø 12 cm for combustion air	P08010360C	35,00 per pack (3 metres)

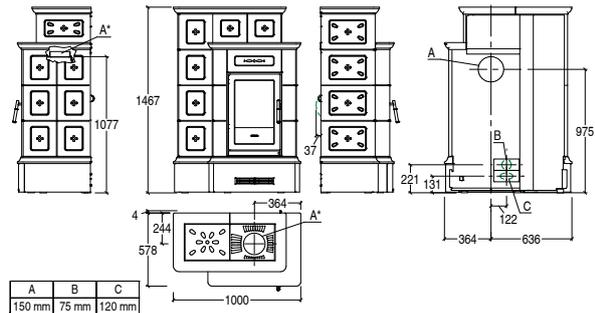

Dimensions in mm.

STUBOTTO - WOOD-BURNING

ORTISEI BCS



GENERAL CHARACTERISTICS

- Heating: Multifuoco System Plus with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: directional air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue position: top or rear (anti-condensation installation, standard on top flue version)
- Glass cleaning: continuous air flow
- Primary and secondary air: electronically controlled - pre-heated
- Pre-set tertiary air: pre-heated
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Nominal thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Size of wood pieces mm
- Firebox opening W x H mm
- Weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

ORTISEI BCS	
Model	SL32-01
Type	185 - 320
Room heating capacity (min - max) m ³	5,5 - 11,1
Nominal heat output (min - max) kW	84,8 - 86,6
Nominal thermal efficiency (min - max) %	1,4 - 2,9
Nominal consumption (min - max) kg/h	370 - 400
Size of wood pieces mm	330 x 395
Firebox opening W x H mm	340
Weight kg	8
PMnom (13% O ₂) mg/Nm ³	25
OGCnom (13% O ₂) mg/Nm ³	



		CODE	EURO
TOTAL PRICE			8.875,00
Cladding	Dome, sides and surrounds Bianco	P15092300C	2.905,00
	Dome, sides and surrounds Blu Verdemare	P15092110C	2.905,00
	Dome, sides and surrounds Canapa	P15092350C	2.905,00
	Dome, sides and surrounds Terra Bruna	P15092320C	2.905,00
	Dome, sides and surrounds Verde Mirto	P15092250C	2.905,00
TOTAL PRICE			9.295,00
Cladding	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verdemare	P15092114C	3.325,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Canapa	P15092354C	3.325,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Terra Bruna	P15092324C	3.325,00
	Dome, sides and surrounds Bianco Antico. Side and dome decorations Verde Mirto	P15092254C	3.325,00
	Stove	Firebox SL30 Ermetico Burn Control System	P07030110C
Essential kit	Support kit (necessary for installation)	P08063710C	1.295,00
Accessories on request			
	Multifuoco System Plus single	P08020700C	470,00
	Flexible pipe Ø 7,5 cm for combustion air / hot air ducting	N08011060C	20,00 per linear metre

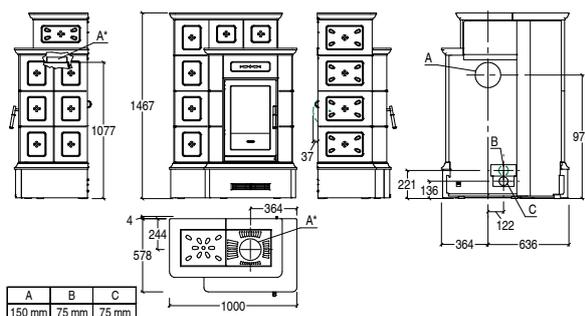

Dimensions in mm.

STUBOTTO - WOOD-BURNING

STUBOTTO C



GENERAL CHARACTERISTICS

- Heating: Multifuoco System® with 4 speed levels, optional. Ductable hot air / Natural convection
- Front ventilation: air vent
- Cladding / Top surface: majolica / majolica
- Stove: steel
- Firebox: Aluker®
- Smoke baffle plate / Brazier: Aluker® / Aluker®
- Door / Handle: painted steel with self-cleaning ceramic glass resistant up to 750°C / detachable
- Standard flue outlet position: top
- Glass cleaning: continuous air flow
- Primary and secondary air: manually adjustable
- Pre-set tertiary air: pre-heated
- Combustion air kit: optional
- Ash vacuum cleaner: optional
- Installation: wall - corner


TECHNICAL DATA

- Model
- Type
- Room heating capacity (min - max) m³
- Nominal heat output (min - max) kW
- Nominal thermal efficiency (min - max) %
- Nominal consumption (min - max) kg/h
- Size of wood pieces mm
- Firebox opening W x H mm
- Weight kg
- PMnom (13% O₂) mg/Nm³
- OGCnom (13% O₂) mg/Nm³

STUBOTTO C	
SL150-01	
Room heating capacity (min - max)	185 - 315
Nominal heat output (min - max)	5,3 - 11,0
Nominal thermal efficiency (min - max)	81,0 - 80,0
Nominal consumption (min - max)	1,4 - 3,1
Size of wood pieces	520 - 550
Firebox opening W x H	565 x 445
Weight	312
PMnom (13% O ₂)	21
OGCnom (13% O ₂)	87




VERSION		CODE	EURO
- WITH FRONT AIR VENT			
TOTAL PRICE			5.290,00
Cladding	BIANCO	P15089300C	2.330,00
TOTAL PRICE			5.670,00
Cladding	Dome Bianco Antico. Sides, surrounds and dome decorations Canapa	P15089351C	2.710,00
	Dome Bianco Antico. Sides, surrounds and dome decorations Rosso Lava	P15089451C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Canapa	P15089352C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Terra Bruna	P15089322C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Verde Mirto	P15089252C	2.710,00
Stove	Firebox SL150	P04806020C	2.960,00
Accessories on request			
Multifuoco System® single		P08020390C	710,00
Multifuoco System Plus single		P08020460C	890,00
Combustion air kit (not compatible with Multifuoco System® and Multifuoco System Plus)		P08018250C	180,00
Flexible pipe Ø 12 cm for combustion air		P08010360	35,00 per pack (3 metres)

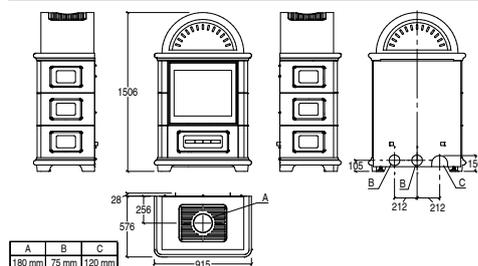

Dimensions in mm.

VERSION		CODE	EURO
- WITHOUT FRONT AIR VENT			
TOTAL PRICE			5.290,00
Cladding	BIANCO	P15079300C	2.330,00
TOTAL PRICE			5.670,00
Cladding	Dome Bianco Antico. Sides, surrounds and dome decorations Canapa	P15079351C	2.710,00
	Dome Bianco Antico. Sides, surrounds and dome decorations Rosso Lava	P15079451C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Canapa	P15079352C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Terra Bruna	P15079322C	2.710,00
	Dome and sides Bianco Antico. Surrounds, side and dome decorations Verde Mirto	P15079252C	2.710,00
Stove	Firebox SL150	P04806020C	2.960,00
Accessories on request			
Multifuoco System® single		P08020390C	710,00
Multifuoco System Plus single		P08020460C	890,00
Combustion air kit (not compatible with Multifuoco System® and Multifuoco System Plus)		P08018250C	180,00
Flexible pipe Ø 12 cm for combustion air		P08010360	35,00 per pack (3 metres)

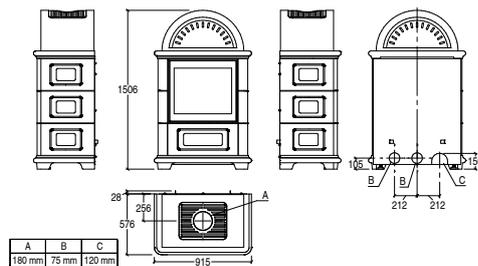

Dimensions in mm.

STUBOTTO - WOOD-BURNING

Accessories

MULTIFUOCO SYSTEM®

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System®	BRUNICO - CANAZEI - ORTISEI	P08020410C	745,00
	STUBOTTO C	P08020390C	710,00

MULTIFUOCO SYSTEM PLUS

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System Plus	BRUNICO - CANAZEI - ORTISEI	P08020500C	920,00
	BRUNICO BCS - CANAZEI BCS - ORTISEI BCS	P08020700C	470,00
	STUBOTTO C	P08020460C	890,00

ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 Aluminium Y connector for wood-burning stoves ^[2]	Ø 7,5	10	N08011006	30,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00

[1] Available in 30 meter roll, minimum order quantity: 1 meter.

[2] For connecting the Multifuoco System fan of all wood stove models to the flex pipe for ducting hot air. Can also be used for branching the hot air ducts.

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO	
 Air vent with closure, enamelled white	L 25 x H 12 Ø 7,5	10	N08011001	60,00	
 Wall air vent with closure, enamelled white	L 25 x H 11 Ø 7,5	6	N08011002	85,00	
 Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00	
	Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
	Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
 Air vent without closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00	
 Air vent with closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00	

STUBOTTO - WOOD-BURNING

Accessories

ACCESSORIES FOR BURN CONTROL SYSTEM

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe for BCS connection	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 90° Aluminium bend connector for BCS	Ø 7,5	10	N08011007	30,00
 Clamp for BCS	Ø 7,5	50	N08011008	5,00
 Connector sleeve for BCS	Ø 7,5	50	N08011009	10,00
 Aeration grille with spring for wall hole Ø 6,0 - 7,5 cm	Ø 6,0 - 7,5 cm	1	N08010014	5,00

COMBUSTION AIR KIT AND ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Combustion air kit	BRUNICO - CANAZEI - ORTISEI	P08061410C	190,00
 Flexible pipe Ø 7,5 cm for combustion air	STUBOTTO C	P08018250C	180,00
 Flexible pipe Ø 7,5 cm for combustion air	BRUNICO BCS - CANAZEI BCS - ORTISEI BCS	N08011060C	20,00 per linear metre
 Flexible pipe Ø 12 cm for combustion air	BRUNICO - CANAZEI - ORTISEI - STUBOTTO C	P08010360	35,00 per pack (3 metres)
 Aeration grille with spring for wall hole Ø 6,0-7,5 cm	BRUNICO BCS - CANAZEI BCS - ORTISEI BCS	N08010014	5,00
 Aeration grille with spring for wall hole Ø 12,0-15,0 cm	BRUNICO - CANAZEI - ORTISEI - STUBOTTO C	N08010015	5,00

EXTERNAL AIR INTAKE GRILLE

ITEM	COMPATIBLE MODELS	CODE	EURO
 White painted adjustable external air intake grille 17,5 x 27,5 cm with manual control	All models	N08010007	40,00

ASH VACUUM CLEANER

ITEM	COMPATIBLE MODELS	CODE	EURO
 Ash vacuum cleaner	All models	N08019040C	105,00

STUBOTTO - WOOD-BURNING

Accessories

PIPES - BENDS - CONNECTORS FOR WOOD-BURNING STUBOTTO

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	L 25	150	P08025020	52,00
	L 50	150	P08025050	72,00
	L 100	150	P08025080	112,00
	L 25	180	P08025030	60,00
	L 50	180	P08025060	80,00
	L 100	180	P08025090	119,00
	L 50	150	P08025100	92,00
	L 100	150	P08025140	132,00
	L 50	180	P08025110	92,00
	L 100	180	P08025150	137,00
	L 32 x H 32	150	P08025200	99,00
	L 32 x H 32	180	P08025210	112,00
	L 25 x H 30	150	P08025230	92,00
	L 25 x H 30	180	P08025240	99,00
	L 17 x H 17	150	P08025260	72,00
	L 17 x H 17	180	P08025270	80,00
	L 70 x H 45	150	P08025170	204,00
	L 70 x H 45	180	P08025180	217,00
	-	150	P08025290	16,00
	-	180	P08025300	56,00
	-	150	P08025350	52,00
	-	180	P08025360	60,00
	-	150	P08025320	40,00
	-	180	P08025330	45,00


STOVE-FIREPLACES

BERNA wood246
DAVOS wood247
LUGANO wood248

Accessories249
-----------------------	------

STOVE-FIREPLACES

BERNA wood

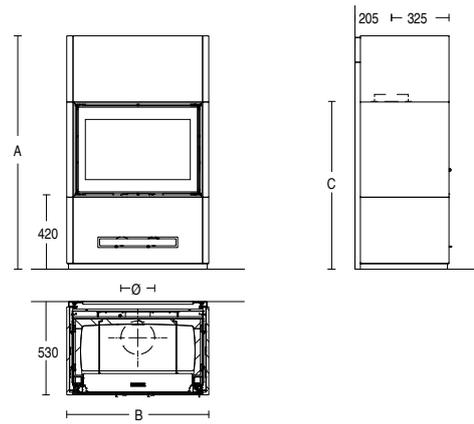

MODEL	TYPE	ENERGY EFFICIENCY CLASS	NOMINAL HEAT OUTPUT (KW)	NOMINAL THERMAL EFFICIENCY (%)	NOMINAL CONSUMPTION (KG/H)	SIZE OF WOOD PIECES (MM)	FIREBOX OPENING W X H (MM)	WEIGHT (KG)	A (MM)	B (MM)	C (MM)	Ø (MM)
BERNA MC 65/60	MC 65/60	A (G → A++)	11,0	80	3,1	520 - 550	565 x 445	264	1416	750	1040	180
BERNA MC 70/51	MC 70/51	A (G → A++)	11,0	79	2,9	560 - 590	615 x 350	246	1326	800	950	180
BERNA MC 90/44	MC 90/44	A (G → A++)	12,0	79,3	3,2	560 - 590	815 x 280	262	1256	1000	880	200
BERNA MC 120/48	MC 120/48	A (G → A++)	14,0	78,9	3,8	560 - 590	110 x 320	332	1296	1280	920	200

Ø Size should be checked during installation.


Dimensions in mm.

COLOUR	CODE CLADDING	PRICE CLADDING	FIREBOX	CODE FIREBOX	PRICE FIREBOX	PRICE TOTAL PRICE
BIANCO	P06180300C					
NERO OPACO	P06180160C					
ROSSO LAVA	P06180450C	2.975,00	MC 65/60 *	P04806010C	2.480,00	5.455,00
TERRA COTTA	P06180090C					
BIANCO	P06181300C					
NERO OPACO	P06181160C					
ROSSO LAVA	P06181450C	2.975,00	MC 70/51 *	P04805110C	2.550,00	5.525,00
TERRA COTTA	P06181090C					
BIANCO	P06182300C					
NERO OPACO	P06182160C					
ROSSO LAVA	P06182450C	3.050,00	MC 90/44 *	P04804410C	2.800,00	5.850,00
TERRA COTTA	P06182090C					
BIANCO	P06183300C					
NERO OPACO	P06183160C					
ROSSO LAVA	P06183450C	3.160,00	MC 120/48 *	P04804810C	3.385,00	6.545,00
TERRA COTTA	P06183090C					

* Specific firebox for Berna, Davos and Lugano claddings, not compatible with the Veneziani surrounds.

STOVE-FIREPLACES

DAVOS wood

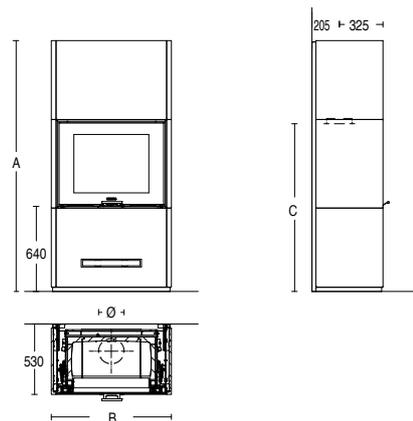

MODEL	TYPE	ENERGY EFFICIENCY CLASS	NOMINAL HEAT OUTPUT (KW)	NOMINAL THERMAL EFFICIENCY (%)	NOMINAL CONSUMPTION (KG/H)	SIZE OF WOOD PIECES (MM)	FIREBOX OPENING W X H (MM)	WEIGHT (KG)	A (MM)	B (MM)	C (MM)	Ø (MM)
DAVOS MC 65/60	MC 65/60	A (G → A++)	11,0	80	3,1	520 - 550	565 x 445	291	1855	750	1260	180
DAVOS MC 70/51	MC 70/51	A (G → A++)	11,0	79	2,9	560 - 590	615 x 350	270	1765	800	1170	180
DAVOS MC 90/44	MC 90/44	A (G → A++)	12,0	79,3	3,2	560 - 590	815 x 280	284	1695	1000	1100	200
DAVOS MC 120/48	MC 120/48	A (G → A++)	14,0	78,9	3,8	560 - 590	110 x 320	327	1735	1280	1140	200

Ø Size should be checked during installation.


Dimensions in mm.

COLOUR	CODE CLADDING	PRICE CLADDING	FIREBOX	CODE FIREBOX	PRICE FIREBOX	PRICE TOTAL PRICE
BIANCO	P06170300C					
NERO OPACO	P06170160C					
ROSSO LAVA	P06170450C	3.145,00	MC 65/60 *	P04806010C	2.480,00	5.625,00
TERRA COTTA	P06170090C					
BIANCO	P06171300C					
NERO OPACO	P06171160C					
ROSSO LAVA	P06171450C	3.145,00	MC 70/51 *	P04805110C	2.550,00	5.695,00
TERRA COTTA	P06171090C					
BIANCO	P06172300C					
NERO OPACO	P06172160C					
ROSSO LAVA	P06172450C	3.210,00	MC 90/44 *	P04804410C	2.800,00	6.010,00
TERRA COTTA	P06172090C					
BIANCO	P06173300C					
NERO OPACO	P06173160C					
ROSSO LAVA	P06173450C	3.330,00	MC 120/48 *	P04804810C	3.385,00	6.715,00
TERRA COTTA	P06173090C					

* Specific firebox for Berna, Davos and Lugano claddings, not compatible with the Veneziani surrounds.

STOVE-FIREPLACES

LUGANO wood

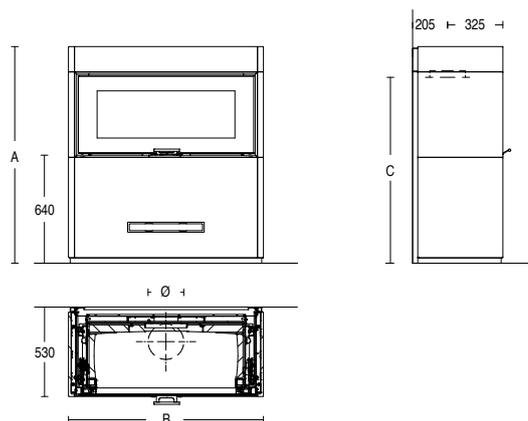

MODEL	TYPE	ENERGY EFFICIENCY CLASS	NOMINAL HEAT OUTPUT (KW)	NOMINAL THERMAL EFFICIENCY (%)	NOMINAL CONSUMPTION (KG/H)	SIZE OF WOOD PIECES (MM)	FIREBOX OPENING W X H (MM)	WEIGHT (KG)	A (MM)	B (MM)	C (MM)	Ø (MM)
LUGANO MC 65/60	MC 65/60	A (G → A++)	11,0	80	3,1	520 - 550	565 x 445	263	1410	750	1260	180
LUGANO MC 70/51	MC 70/51	A (G → A++)	11,0	79	2,9	560 - 590	615 x 350	245	1320	800	1170	180
LUGANO MC 90/44	MC 90/44	A (G → A++)	12,0	79,3	3,2	560 - 590	815 x 280	260	1250	1000	1100	200
LUGANO MC 120/48	MC 120/48	A (G → A++)	14,0	78,9	3,8	560 - 590	110 x 320	331	1290	1280	1140	200

Ø Size should be checked during installation.

Dimensions in mm.

COLOUR	CODE CLADDING	PRICE CLADDING	FIREBOX	CODE FIREBOX	PRICE FIREBOX	PRICE TOTAL PRICE
BIANCO	P06190300C					
NERO OPACO	P06190160C					
ROSSO LAVA	P06190450C	2.905,00	MC 65/60 *	P04806010C	2.480,00	5.385,00
TERRA COTTA	P06190090C					
BIANCO	P06191300C					
NERO OPACO	P06191160C					
ROSSO LAVA	P06191450C	2.905,00	MC 70/51 *	P04805110C	2.550,00	5.455,00
TERRA COTTA	P06191090C					
BIANCO	P06192300C					
NERO OPACO	P06192160C					
ROSSO LAVA	P06192450C	2.965,00	MC 90/44 *	P04804410C	2.800,00	5.765,00
TERRA COTTA	P06192090C					
BIANCO	P06193300C					
NERO OPACO	P06193160C					
ROSSO LAVA	P06193450C	3.090,00	MC 120/48 *	P04804810C	3.385,00	6.475,00
TERRA COTTA	P06193090C					

* Specific firebox for Berna, Davos and Lugano claddings, not compatible with the Veneziani surrounds.

STOVE-FIREPLACES

Accessories for wood-burning stove-fireplaces

MULTIFUOCO SYSTEM®

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System®	BERNA - DAVOS - LUGANO	P08020390C	710,00

MULTIFUOCO SYSTEM PLUS

ITEM	COMPATIBLE MODELS	CODE	EURO
 Multifuoco System Plus	BERNA - DAVOS - LUGANO	P08020460C	890,00

COMBUSTION AIR KIT AND ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Combustion air kit	BERNA - DAVOS - LUGANO MC 65/60	P08018250C	180,00
	BERNA - DAVOS - LUGANO MC 70/51	P08014680C	180,00
	BERNA - DAVOS - LUGANO MC 90/44	P08014690C	180,00
	BERNA - DAVOS - LUGANO MC 120/48	P08014860C	180,00
 Flexible pipe Ø 12 cm for combustion air	BERNA - DAVOS - LUGANO	P08010360	35,00 per pack (3 metres)
 Aeration grille with spring for wall hole Ø 6,0-7,5 cm	All models	N08010014	5,00

EXTERNAL AIR INTAKE GRILLE

ITEM	COMPATIBLE MODELS	CODE	EURO
 White painted adjustable external air intake grille 17,5 x 27,5 cm with manual control	All models	N08010007	40,00

ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 Aluminium Y connector for pellet stoves ^[2]	Ø 7,5	10	N08011016	28,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00

[1] Available in 30 meter roll, minimum order quantity: 1 meter.

[2] For connecting the Multifuoco System fan to the flex pipe for ducting hot air.

ASH VACUUM CLEANER

ITEM	COMPATIBLE MODELS	CODE	EURO
 Ash vacuum cleaner	All models	N08019040C	105,00

STOVE-FIREPLACES

Accessories for wood-burning stove-fireplaces

PIPES - BENDS - CONNECTORS FOR WOOD-BURNING STOVE-FIREPLACES


Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	L 25	180	P08025030	60,00
	L 50	180	P08025060	80,00
	L 100	180	P08025090	119,00
	L 25	200	P08027270	66,00
	L 50	200	P08027280	85,00
	L 100	200	P08027290	123,00
	L 50	180	P08025110	92,00
	L 100	180	P08025150	137,00
	L 50	200	P08027300	92,00
	L 100	200	P08027310	144,00
	L 32 x H 32	180	P08025210	112,00
		200	P08027320	126,00
	L 25 x H 30	180	P08025240	99,00
		200	P08027330	104,00
	L 17 x H 17	180	P08025270	80,00
		200	P08027340	85,00
	L 70 x H 45	180	P08025180	217,00
		200	P08027350	229,00
	-	180	P08025300	56,00
		200	P08027360	60,00
	-	180	P08025360	60,00
		200	P08027370	66,00
	-	180	P08025330	45,00
		200	P08027380	52,00

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
	L 25 x H 12 Ø 7,5	10	N08011001	60,00
	L 25 x H 11 Ø 7,5	6	N08011002	85,00
	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00
	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
	All models	100x120	P08024300C	335,00
	All models	100x120	P08024310C	335,00


GAS STOVES

G958252
G958 C254
G958 D256
G958 M258
G963260
G963 C262
G963 D264
G963 M266

Accessories268
-------------	-----------	------

GAS STOVES

G958 - NG

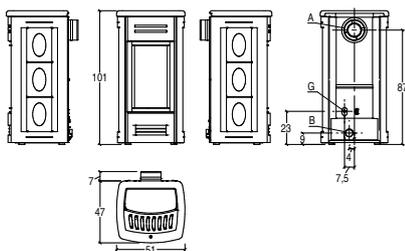

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: Natural convection / Forced ventilation with Multifuoco System®. Ductable hot air
- Front ventilation: fixed air vent
- Cladding: majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: methane
- Door: steel with self-cleaning ceramic glass resistant up to 750°C
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- Power setting: 6 levels
- LCD remote control: yes
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.225,00
Cladding	BIANCO GRIGIO	P06083410C 855,00
	BORDEAUX	P06083420C 855,00
	NERO OPACO	P06083160C 855,00
	TERRA ORIENTE	P06083550C 855,00

TOTAL STOVE		4.365,00
Cladding	BLU VERDEMARE	P06083110C 995,00
	ROSSO LAVA	P06083450C 995,00

Stove	G958 Natural gas natural convection	P76958110C	3.370,00
-------	-------------------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 1,5 kg	P08099110C	22,00
-----------------------------	------------	-------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		4.735,00
Cladding	BIANCO GRIGIO	P06083410C 855,00
	BORDEAUX	P06083420C 855,00
	NERO OPACO	P06083160C 855,00
	TERRA ORIENTE	P06083550C 855,00

TOTAL STOVE		4.875,00
Cladding	BLU VERDEMARE	P06083110C 995,00
	ROSSO LAVA	P06083450C 995,00

Stove	G958 Natural gas forced ventilation	P76958100C	3.880,00
-------	-------------------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 1,5 kg	P08099110C	22,00
-----------------------------	------------	-------

TECHNICAL DATA

Natural convection version

• Model		G958 NG
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 80,3
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	103

Version with Multifuoco System® as standard feature


• Model		G958 MF/NG
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	107



All dimensions in cm.

GAS STOVES

G958 - LPG

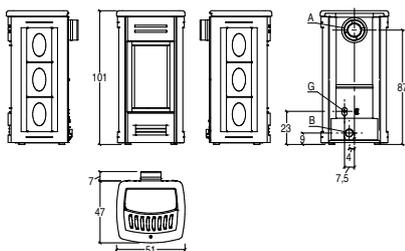

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

VERSION	NATURAL CONVECTION	CODE	EURO
TOTAL STOVE			4.225,00
Cladding	BIANCO GRIGIO	P06083410C	855,00
	BORDEAUX	P06083420C	855,00
	NERO OPACO	P06083160C	855,00
	TERRA ORIENTE	P06083550C	855,00
TOTAL STOVE			4.365,00
Cladding	BLU VERDEMARE	P06083110C	995,00
	ROSSO LAVA	P06083450C	995,00
Stove	G958 LPG natural convection	P76958010C	3.370,00
Accessories on request			
	Ceramic pebbles pack 1,5 kg	P08099110C	22,00

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	CODE	EURO
TOTAL STOVE			4.735,00
Cladding	BIANCO GRIGIO	P06083410C	855,00
	BORDEAUX	P06083420C	855,00
	NERO OPACO	P06083160C	855,00
	TERRA ORIENTE	P06083550C	855,00
TOTAL STOVE			4.875,00
Cladding	BLU VERDEMARE	P06083110C	995,00
	ROSSO LAVA	P06083450C	995,00
Stove	G958 LPG forced ventilation	P76958000C	3.880,00
Accessories on request			
	Ceramic pebbles pack 1,5 kg	P08099110C	22,00

TECHNICAL DATA

Natural convection version

		Propane	Propane/Butane
• Model		G958 LPG	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m ³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 78,6	80,1 - 80,1
• Gas volume flow rate (min - max)	m ³ /h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg		103

Version with Multifuoco System® as standard feature


		Propane	Propane/Butane
• Model		G958 MF/LPG	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m ³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 82,1	80,1 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg		107



All dimensions in cm.

GAS STOVES

G958 C - NG

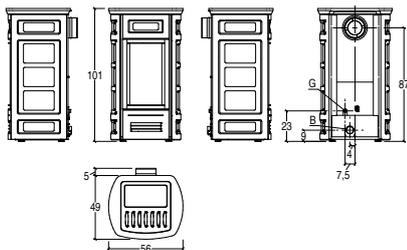

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: AluKer®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.390,00
Cladding	BIANCO MERINGA	P06044820C 1.020,00
	BORDEAUX	P06044420C 1.020,00
	TERRA ORIENTE	P06044550C 1.020,00
	VERDE MIRTO	P06044250C 1.020,00

TOTAL STOVE		4.510,00
Cladding	GIALLO ACCESO	P06044260C 1.140,00
	GRIGIO CERATO	P06044310C 1.140,00

Stove	G958 Natural gas natural convection	P76958110C 3.370,00
-------	-------------------------------------	---------------------

Accessories on request

Ceramic pebbles pack 1,5 kg	P08099110C 22,00
-----------------------------	------------------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		4.900,00
Cladding	BIANCO MERINGA	P06044820C 1.020,00
	BORDEAUX	P06044420C 1.020,00
	TERRA ORIENTE	P06044550C 1.020,00
	VERDE MIRTO	P06044250C 1.020,00

TOTAL STOVE		5.020,00
Cladding	GIALLO ACCESO	P06044260C 1.140,00
	GRIGIO CERATO	P06044310C 1.140,00

Stove	G958 Natural gas forced ventilation	P76958100C 3.880,00
-------	-------------------------------------	---------------------

Accessories on request

Ceramic pebbles pack 1,5 kg	P08099110C 22,00
-----------------------------	------------------

TECHNICAL DATA

Natural convection version

• Model		G958 NG C
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 80,3
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	103

Version with Multifuoco System® as standard feature


• Model		G958 MF/NG C
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	107



All dimensions in cm.

GAS STOVES

G958 C - LPG

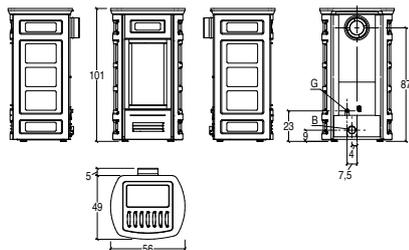

A	B	G
10 / 15 cm	7,5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION		
TOTAL STOVE			4.390,00
Cladding	BIANCO MERINGA	P06044820C	1.020,00
	BORDEAUX	P06044420C	1.020,00
	TERRA ORIENTE	P06044550C	1.020,00
	VERDE MIRTO	P06044250C	1.020,00

TOTAL STOVE			4.510,00
Cladding	GIALLO ACCESO	P06044260C	1.140,00
	GRIGIO CERATO	P06044310C	1.140,00

Stove	G958 LPG natural convection	P76958010C	3.370,00
-------	-----------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 1,5 kg	P08099110C	22,00
-----------------------------	------------	-------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE		
TOTAL STOVE			4.900,00
Cladding	BIANCO MERINGA	P06044820C	1.020,00
	BORDEAUX	P06044420C	1.020,00
	TERRA ORIENTE	P06044550C	1.020,00
	VERDE MIRTO	P06044250C	1.020,00

TOTAL STOVE			5.020,00
Cladding	GIALLO ACCESO	P06044260C	1.140,00
	GRIGIO CERATO	P06044310C	1.140,00

Stove	G958 LPG forced ventilation	P76958000C	3.880,00
-------	-----------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 1,5 kg	P08099110C	22,00
-----------------------------	------------	-------

TECHNICAL DATA

Natural convection version

		Propane	Propane/Butane
• Model		G958 LPG C	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m ³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 78,6	80,1 - 80,1
• Gas volume flow rate (min - max)	m ³ /h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg		103

Version with Multifuoco System® as standard feature


		Propane	Propane/Butane
• Model		G958 MF/LPG C	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m ³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 82,1	80,1 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg		107



All dimensions in cm.

GAS STOVES

G958 D - NG

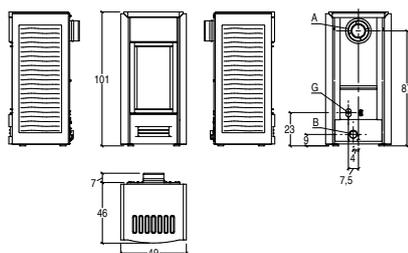

A	B	G
10 / 18 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.225,00
Cladding	ARDESIA	P06048240C 855,00
	BIANCO ANTICO	P06048640C 855,00
	CANAPA	P06048350C 855,00
	TERRA COTTA	P06048090C 855,00
TOTAL STOVE		4.365,00
Cladding	GIALLO ACCESO	P06048260C 995,00
	ROSSO LAVA	P06048450C 995,00
Stove	G958 Natural gas natural convection	P76958110C 3.370,00
Accessories on request		
	Ceramic pebbles pack 1,5 kg	P08099110C 22,00

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		4.735,00
Cladding	ARDESIA	P06048240C 855,00
	BIANCO ANTICO	P06048640C 855,00
	CANAPA	P06048350C 855,00
	TERRA COTTA	P06048090C 855,00
TOTAL STOVE		4.875,00
Cladding	GIALLO ACCESO	P06048260C 995,00
	ROSSO LAVA	P06048450C 995,00
Stove	G958 Natural gas forced ventilation	P76958100C 3.880,00
Accessories on request		
	Ceramic pebbles pack 1,5 kg	P08099110C 22,00

TECHNICAL DATA

Natural convection version

• Model		G958 NG D
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 80,3
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	103

Version with Multifuoco System® as standard feature


• Model		G958 MF/NG D
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	107



All dimensions in cm.

GAS STOVES

G958 D - LPG

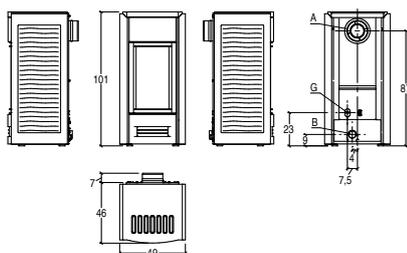

A	B	G
10/15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION		
TOTAL STOVE			4.225,00
Cladding	ARDESIA	P06048240C	855,00
	BIANCO ANTICO	P06048640C	855,00
	CANAPA	P06048350C	855,00
	TERRA COTTA	P06048090C	855,00
TOTAL STOVE			4.365,00
Cladding	GIALLO ACCESO	P06048260C	995,00
	ROSSO LAVA	P06048450C	995,00
Stove	G958 LPG natural convection	P76958010C	3.370,00
Accessories on request			
	Ceramic pebbles pack 1,5 kg	P08099110C	22,00

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE		
TOTAL STOVE			4.735,00
Cladding	ARDESIA	P06048240C	855,00
	BIANCO ANTICO	P06048640C	855,00
	CANAPA	P06048350C	855,00
	TERRA COTTA	P06048090C	855,00
TOTAL STOVE			4.875,00
Cladding	GIALLO ACCESO	P06048260C	995,00
	ROSSO LAVA	P06048450C	995,00
Stove	G958 LPG forced ventilation	P76958000C	3.880,00
Accessories on request			
	Ceramic pebbles pack 1,5 kg	P08099110C	22,00

TECHNICAL DATA

Natural convection version

		Propane	Propane/Butane
• Model		G958 LPG D	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 78,6	80,1 - 80,1
• Gas volume flow rate (min - max)	m³/h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg	103	

Version with Multifuoco System® as standard feature


		Propane	Propane/Butane
• Model		G958 MF/LPG D	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 82,1	80,1 - 83,0
• Gas volume flow rate (min - max)	m³/h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg	107	



All dimensions in cm.

GAS STOVES

G958 M - NG

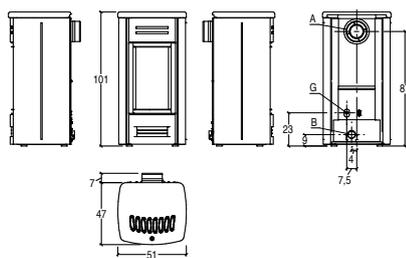

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION		
TOTAL STOVE			4.225,00
Cladding	NERO OPACO	P06045160C	855,00
TOTAL STOVE			4.365,00
Cladding	BIANCO GRIGIO	P06045410C	995,00
	ROSSO LAVA	P06045450C	995,00
Stove	G958 Natural gas natural convection	P76958110C	3.370,00
Accessories on request			
	Ceramic pebbles pack 1,5 kg	P08099110C	22,00

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE		
TOTAL STOVE			4.735,00
Cladding	NERO OPACO	P06045160C	855,00
TOTAL STOVE			4.875,00
Cladding	BIANCO GRIGIO	P06045410C	995,00
	ROSSO LAVA	P06045450C	995,00
Stove	G958 Natural gas forced ventilation	P76958100C	3.880,00
Accessories on request			
	Ceramic pebbles pack 1,5 kg	P08099110C	22,00

TECHNICAL DATA

Natural convection version

• Model		G958 NG M
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 80,3
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	103

Version with Multifuoco System® as standard feature


• Model		G958 MF/NG M
• Energy efficiency class		D (G → A++)
• Room heating capacity (min - max)	m ³	100 - 175
• Nominal heat output (min - max)	kW	2,5 - 6,0
• Thermal efficiency (min - max)	%	80,3 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,2 - 0,6
• Stove weight	kg	107



All dimensions in cm.

GAS STOVES

G958 M - LPG

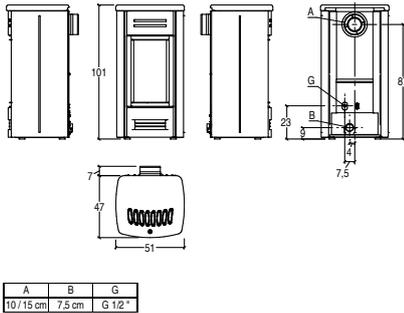

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.225,00
Cladding	NERO OPACO	P06045160C 855,00
TOTAL STOVE		4.365,00
Cladding	BIANCO GRIGIO ROSSO LAVA	P06045410C 995,00 P06045450C 995,00
Stove	G958 LPG natural convection	P76958010C 3.370,00
Accessories on request		
	Ceramic pebbles pack 1,5 kg	P08099110C 22,00

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		4.735,00
Cladding	NERO OPACO	P06045160C 855,00
TOTAL STOVE		4.875,00
Cladding	BIANCO GRIGIO ROSSO LAVA	P06045410C 995,00 P06045450C 995,00
Stove	G958 LPG forced ventilation	P76958000C 3.880,00
Accessories on request		
	Ceramic pebbles pack 1,5 kg	P08099110C 22,00

TECHNICAL DATA

Natural convection version

		Propane	Propane/Butane
• Model		G958 LPG M	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m ³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 78,6	80,1 - 80,1
• Gas volume flow rate (min - max)	m ³ /h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg	103	

Version with Multifuoco System® as standard feature


		Propane	Propane/Butane
• Model		G958 MF/LPG M	
• Energy efficiency class		D (G → A++)	
• Room heating capacity (min - max)	m ³	75 - 130	85 - 145
• Nominal heat output (min - max)	kW	2,2 - 4,5	2,5 - 5,0
• Thermal efficiency (min - max)	%	78,6 - 82,1	80,1 - 83,0
• Gas volume flow rate (min - max)	m ³ /h	0,08 - 0,1	0,07 - 0,1
• Stove weight	kg	107	



All dimensions in cm.

GAS STOVES

G963 - NG

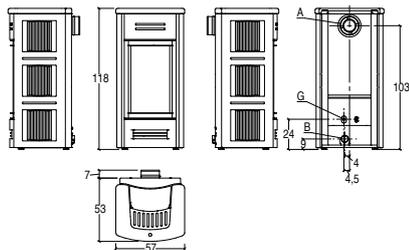

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: AluKer®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.900,00
Cladding	BIANCO GRIGIO	P06074410C 1.075,00
	BORDEAUX	P06074420C 1.075,00
	NERO OPACO	P06074160C 1.075,00
	TERRA ORIENTE	P06074550C 1.075,00

TOTAL STOVE		5.015,00
Cladding	GRIGIO CERATO	P06074310C 1.190,00
	ROSSO LAVA	P06074450C 1.190,00

Stove	G963 Natural gas natural convection	P76963110C 3.825,00
-------	-------------------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		5.415,00
Cladding	BIANCO GRIGIO	P06074410C 1.075,00
	BORDEAUX	P06074420C 1.075,00
	NERO OPACO	P06074160C 1.075,00
	TERRA ORIENTE	P06074550C 1.075,00

TOTAL STOVE		5.530,00
Cladding	GRIGIO CERATO	P06074310C 1.190,00
	ROSSO LAVA	P06074450C 1.190,00

Stove	G963 Natural gas forced ventilation	P76963100C 4.340,00
-------	-------------------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

TECHNICAL DATA

Natural convection version

• Model		G963 NG
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 83,9
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	124

Version with Multifuoco System® as standard feature


• Model		G963 MF/NG
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 86,1
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	128



All dimensions in cm.

GAS STOVES

G963 - LPG

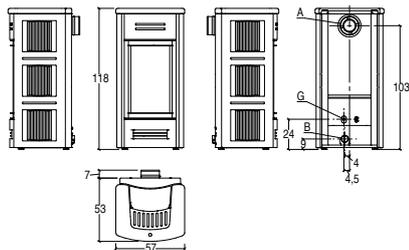

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.900,00
Cladding	BIANCO GRIGIO	P06074410C 1.075,00
	BORDEAUX	P06074420C 1.075,00
	NERO OPACO	P06074160C 1.075,00
	TERRA ORIENTE	P06074550C 1.075,00

TOTAL STOVE		5.015,00
Cladding	GRIGIO CERATO	P06074310C 1.190,00
	ROSSO LAVA	P06074450C 1.190,00

Stove	G963 LPG natural convection	P76963010C 3.825,00
-------	-----------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		5.415,00
Cladding	BIANCO GRIGIO	P06074410C 1.075,00
	BORDEAUX	P06074420C 1.075,00
	NERO OPACO	P06074160C 1.075,00
	TERRA ORIENTE	P06074550C 1.075,00

TOTAL STOVE		5.530,00
Cladding	GRIGIO CERATO	P06074310C 1.190,00
	ROSSO LAVA	P06074450C 1.190,00

Stove	G963 LPG forced ventilation	P76963000C 4.340,00
-------	-----------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

TECHNICAL DATA

Natural convection version

		Propane		Propane/Butane	
		G963 LPG			
		D (G → A++)	C (G → A++)		
• Model					
• Energy efficiency class					
• Room heating capacity (min - max)	m ³	100 - 170	110 - 190		
• Nominal heat output (min - max)	kW	3,5 - 5,8	4,0 - 6,5		
• Thermal efficiency (min - max)	%	81,6 - 81,6	83,0 - 83,0		
• Gas volume flow rate (min - max)	m ³ /h	0,1 - 0,2	0,1 - 0,1		
• Stove weight	kg		124		

Version with Multifuoco System® as standard feature


		Propane		Propane/Butane	
		G963 MF/LPG			
		C (G → A++)			
• Model					
• Energy efficiency class					
• Room heating capacity (min - max)	m ³	100 - 170	110 - 190		
• Nominal heat output (min - max)	kW	3,5 - 5,8	4,0 - 6,5		
• Thermal efficiency (min - max)	%	81,6 - 84,5	83,0 - 85,3		
• Gas volume flow rate (min - max)	m ³ /h	0,1 - 0,2	0,1 - 0,1		
• Stove weight	kg		128		



All dimensions in cm.

GAS STOVES

G963 C - NG

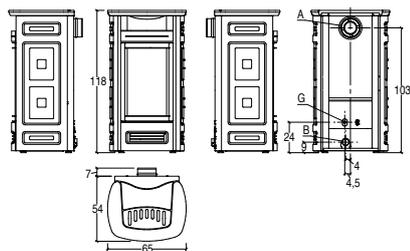

A	B	G
10 / 15 cm	7,5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: AluKer®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		5.015,00
Cladding	BIANCO MERINGA	P06046820C 1.190,00
	BORDEAUX	P06046420C 1.190,00
	TERRA ORIENTE	P06046550C 1.190,00
	VERDE MIRTO	P06046250C 1.190,00

TOTAL STOVE		5.145,00
Cladding	GIALLO ACCESO	P06046260C 1.320,00
	GRIGIO CERATO	P06046310C 1.320,00

Stove	G963 Natural gas natural convection	P76963110C 3.825,00
-------	-------------------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		5.530,00
Cladding	BIANCO MERINGA	P06046820C 1.190,00
	BORDEAUX	P06046420C 1.190,00
	TERRA ORIENTE	P06046550C 1.190,00
	VERDE MIRTO	P06046250C 1.190,00

TOTAL STOVE		5.660,00
Cladding	GIALLO ACCESO	P06046260C 1.320,00
	GRIGIO CERATO	P06046310C 1.320,00

Stove	G963 Natural gas forced ventilation	P76963100C 4.340,00
-------	-------------------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

TECHNICAL DATA

Natural convection version

• Model		G963 NG C
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 83,9
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	124

Version with Multifuoco System® as standard feature


• Model		G963 MF/NG C
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 86,1
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	128



All dimensions in cm.

GAS STOVES

G963 C - LPG

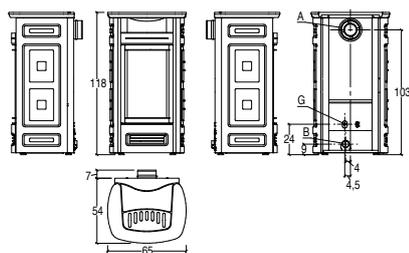

A	B	G
10/15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection / forced ventilation with Multifuoco System®. Ductable hot air
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION		
TOTAL STOVE			5.015,00
Cladding	BIANCO MERINGA	P06046820C	1.190,00
	BORDEAUX	P06046420C	1.190,00
	TERRA ORIENTE	P06046550C	1.190,00
	VERDE MIRTO	P06046250C	1.190,00

TOTAL STOVE			5.145,00
Cladding	GIALLO ACCESO	P06046260C	1.320,00
	GRIGIO CERATO	P06046310C	1.320,00

Stove	G963 LPG natural convection	P76963010C	3.825,00
-------	-----------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 2,5 kg		P08099050C	27,00
-----------------------------	--	------------	-------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE		
TOTAL STOVE			5.530,00
Cladding	BIANCO MERINGA	P06046820C	1.190,00
	BORDEAUX	P06046420C	1.190,00
	TERRA ORIENTE	P06046550C	1.190,00
	VERDE MIRTO	P06046250C	1.190,00

TOTAL STOVE			5.660,00
Cladding	GIALLO ACCESO	P06046260C	1.320,00
	GRIGIO CERATO	P06046310C	1.320,00

Stove	G963 LPG forced ventilation	P76963000C	4.340,00
-------	-----------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 2,5 kg		P08099050C	27,00
-----------------------------	--	------------	-------

TECHNICAL DATA

Natural convection version

		Propane		Propane/Butane	
		G963 LPG C			
		D (G → A++)	C (G → A++)		
• Model		100 - 170	110 - 190		
• Energy efficiency class		3,5 - 5,8	4,0 - 6,5		
• Room heating capacity (min - max)	m ³	81,6 - 81,6	83,0 - 83,0		
• Nominal heat output (min - max)	kW	0,1 - 0,2	0,1 - 0,1		
• Thermal efficiency (min - max)	%				
• Gas volume flow rate (min - max)	m ³ /h				
• Stove weight	kg			124	

Version with Multifuoco System® as standard feature


		Propane		Propane/Butane	
		G963 MF/LPG C			
		C (G → A++)			
• Model		100 - 170	110 - 190		
• Energy efficiency class		3,5 - 5,8	4,0 - 6,5		
• Room heating capacity (min - max)	m ³	81,6 - 84,5	83,0 - 85,3		
• Nominal heat output (min - max)	kW	0,1 - 0,2	0,1 - 0,1		
• Thermal efficiency (min - max)	%				
• Gas volume flow rate (min - max)	m ³ /h				
• Stove weight	kg			128	



All dimensions in cm.

GAS STOVES

G963 D - NG

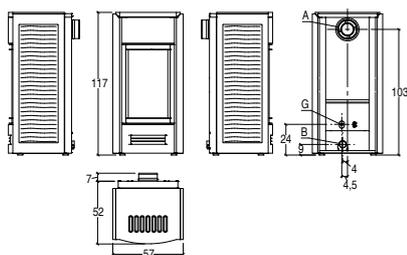

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: AluKer®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.900,00
Cladding	ARDESIA	P06049240C 1.075,00
	BIANCO ANTICO	P06049640C 1.075,00
	CANAPA	P06049350C 1.075,00
	TERRA COTTA	P06049090C 1.075,00

TOTAL STOVE		5.015,00
Cladding	GIALLO ACCESO	P06049260C 1.190,00
	ROSSO LAVA	P06049450C 1.190,00

Stove	G963 Natural gas natural convection	P76963110C	3.825,00
-------	-------------------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C	27,00
-----------------------------	------------	-------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		5.415,00
Cladding	ARDESIA	P06049240C 1.075,00
	BIANCO ANTICO	P06049640C 1.075,00
	CANAPA	P06049350C 1.075,00
	TERRA COTTA	P06049090C 1.075,00

TOTAL STOVE		5.530,00
Cladding	GIALLO ACCESO	P06049260C 1.190,00
	ROSSO LAVA	P06049450C 1.190,00

Stove	G963 Natural gas forced ventilation	P76963100C	4.340,00
-------	-------------------------------------	------------	----------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C	27,00
-----------------------------	------------	-------

TECHNICAL DATA

Natural convection version

• Model		G963 NG D
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 83,9
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	124

Version with Multifuoco System® as standard feature


• Model		G963 MF/NG D
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 86,1
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	128



All dimensions in cm.

GAS STOVES

G963 D - LPG

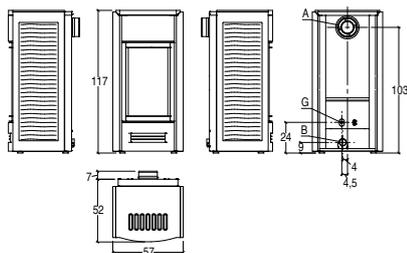

A	B	G
10/15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION	
TOTAL STOVE		4.900,00
Cladding	ARDESIA	P06049240C 1.075,00
	BIANCO ANTICO	P06049640C 1.075,00
	CANAPA	P06049350C 1.075,00
	TERRA COTTA	P06049090C 1.075,00

TOTAL STOVE		5.015,00
Cladding	GIALLO ACCESO	P06049260C 1.190,00
	ROSSO LAVA	P06049450C 1.190,00

Stove	G963 LPG natural convection	P76963010C 3.825,00
-------	-----------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE	
TOTAL STOVE		5.415,00
Cladding	ARDESIA	P06049240C 1.075,00
	BIANCO ANTICO	P06049640C 1.075,00
	CANAPA	P06049350C 1.075,00
	TERRA COTTA	P06049090C 1.075,00

TOTAL STOVE		5.530,00
Cladding	GIALLO ACCESO	P06049260C 1.190,00
	ROSSO LAVA	P06049450C 1.190,00

Stove	G963 LPG forced ventilation	P76963000C 4.340,00
-------	-----------------------------	---------------------

Accessories on request

Ceramic pebbles pack 2,5 kg	P08099050C 27,00
-----------------------------	------------------

TECHNICAL DATA

Natural convection version

		Propane		Propane/Butane	
		G963 LPG D			
		D (G → A++)	C (G → A++)		
• Model					
• Energy efficiency class					
• Room heating capacity (min - max)	m ³	100 - 170	110 - 190		
• Nominal heat output (min - max)	kW	3,5 - 5,8	4,0 - 6,5		
• Thermal efficiency (min - max)	%	81,6 - 81,6	83,0 - 83,0		
• Gas volume flow rate (min - max)	m ³ /h	0,1 - 0,2	0,1 - 0,1		
• Stove weight	kg		124		

Version with Multifuoco System® as standard feature


		Propane		Propane/Butane	
		G963 MF/LPG D			
		C (G → A++)			
• Model					
• Energy efficiency class					
• Room heating capacity (min - max)	m ³	100 - 170	110 - 190		
• Nominal heat output (min - max)	kW	3,5 - 5,8	4,0 - 6,5		
• Thermal efficiency (min - max)	%	81,6 - 84,5	83,0 - 85,3		
• Gas volume flow rate (min - max)	m ³ /h	0,1 - 0,2	0,1 - 0,1		
• Stove weight	kg		128		



All dimensions in cm.

GAS STOVES

G963 M - NG

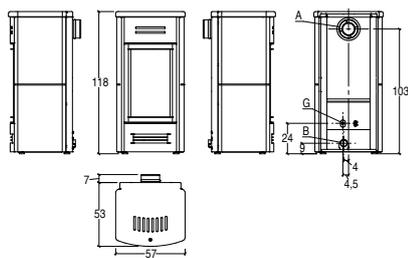

A	B	G
10 / 15 cm	7,5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: methane
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION		
TOTAL STOVE			4.900,00
Cladding	NERO OPACO	P06047160C	1.075,00
TOTAL STOVE			5.015,00
Cladding	BIANCO GRIGIO	P06047410C	1.190,00
	ROSSO LAVA	P06047450C	1.190,00
Stove	G963 Natural gas natural convection	P76963110C	3.825,00
Accessories on request			
	Ceramic pebbles pack 2,5 kg	P08099050C	27,00

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE		
TOTAL STOVE			5.415,00
Cladding	NERO OPACO	P06047160C	1.075,00
TOTAL STOVE			5.530,00
Cladding	BIANCO GRIGIO	P06047410C	1.190,00
	ROSSO LAVA	P06047450C	1.190,00
Stove	G963 Natural gas forced ventilation	P76963100C	4.340,00
Accessories on request			
	Ceramic pebbles pack 2,5 kg	P08099050C	27,00

TECHNICAL DATA

Natural convection version

• Model		G963 NG M
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 83,9
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	124

Version with Multifuoco System® as standard feature


• Model		G963 MF/NG M
• Energy efficiency class		C (G → A++)
• Room heating capacity (min - max)	m ³	150 - 260
• Nominal heat output (min - max)	kW	4,0 - 9,0
• Thermal efficiency (min - max)	%	83,9 - 86,1
• Gas volume flow rate (min - max)	m ³ /h	0,4 - 0,9
• Stove weight	kg	128



All dimensions in cm.

GAS STOVES

G963 M - LPG

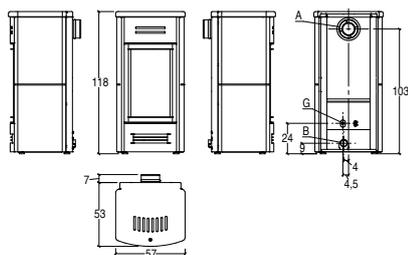

A	B	G
10 / 15 cm	7.5 cm	G 1/2"

GENERAL CHARACTERISTICS

- Heating: natural convection
- Front ventilation: fixed air vent
- Cladding / Top surface: majolica / majolica
- Stove: airtight, steel, natural draught with balanced flue
- Firebox: Aluker®
- Burner: LPG
- Ceramic glass: self-cleaning, with ultra-fine mesh for safety touch protection
- Standard flue outlet position: rear
- LCD remote control: yes
- Power level: 6 levels
- Ceramic logs and coals: standard
- Special ceramic pebbles: optional
- Installation: wall - corner
- Power setting: 6 levels

CODE EURO

VERSION	NATURAL CONVECTION		
TOTAL STOVE			4.900,00
Cladding	NERO OPACO	P06047160C	1.075,00
TOTAL STOVE			5.015,00
Cladding	BIANCO GRIGIO	P06047410C	1.190,00
	ROSSO LAVA	P06047450C	1.190,00
Stove	G963 LPG natural convection	P76963010C	3.825,00
Accessories on request			
	Ceramic pebbles pack 2,5 kg	P08099050C	27,00

CODE EURO

VERSION	STANDARD ON MULTIFUOCO SYSTEM® DUCTABLE		
TOTAL STOVE			5.415,00
Cladding	NERO OPACO	P06047160C	1.075,00
TOTAL STOVE			5.530,00
Cladding	BIANCO GRIGIO	P06047410C	1.190,00
	ROSSO LAVA	P06047450C	1.190,00
Stove	G963 LPG forced ventilation	P76963000C	4.340,00
Accessories on request			
	Ceramic pebbles pack 2,5 kg	P08099050C	27,00

TECHNICAL DATA

Natural convection version

		Propane		Propane/Butane	
		G963 LPG M			
		D (G → A++)	C (G → A++)		
• Model					
• Energy efficiency class					
• Room heating capacity (min - max)	m ²	100 - 170	110 - 190		
• Nominal heat output (min - max)	kW	3,5 - 5,8	4,0 - 6,5		
• Thermal efficiency (min - max)	%	81,6 - 81,6	83,0 - 83,0		
• Gas volume flow rate (min - max)	m ³ /h	0,1 - 0,2	0,1 - 0,1		
• Stove weight	kg		124		

Version with Multifuoco System® as standard feature

		Propane		Propane/Butane	
		G963 MF/LPG M			
		C (G → A++)			
• Model					
• Energy efficiency class					
• Room heating capacity (min - max)	m ²	100 - 170	110 - 190		
• Nominal heat output (min - max)	kW	3,5 - 5,8	4,0 - 6,5		
• Thermal efficiency (min - max)	%	81,6 - 84,5	83,0 - 85,3		
• Gas volume flow rate (min - max)	m ³ /h	0,1 - 0,2	0,1 - 0,1		
• Stove weight	kg		128		



All dimensions in cm.

NATURAL GAS STOVES - LPG STOVES

Accessories

CERAMIC PEBBLES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Ceramic pebbles pack 1,5 kg	Series G958	P08099110C	22,00
Ceramic pebbles pack 2,5 kg	Series G963	P08099050C	27,00

ACCESSORIES FOR HOT AIR DUCTING

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060C	20,00 per linear metre
 Aluminium Y connector ^[2]	Ø 7,5	10	N08011006	30,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00


[1] Available in 30 meter roll, minimum order quantity: 1 meter.

[2] For connecting the Multifuoco System fan on all gas models to the flex pipe for ducting hot air. Can also be used for branching the hot air ducts.

AIR VENTS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Air vent with closure, enamelled white	L 25 x H 12 Ø 7,5	10	N08011001	60,00
 Wall air vent with closure, enamelled white	L 25 x H 11 Ø 7,5	6	N08011002	85,00
 Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
 Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
 Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
 Air vent without closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00
 Air vent with closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
 Rectangular steel floor plate	All models	100x120	P08024300C	335,00
 Round edged steel floor plate	All models	100x120	P08024310C	335,00

NATURAL GAS STOVES - LPG STOVES

Accessories

COAXIAL PIPES AND BENDS FOR GAS APPLIANCES

Air intake and fumes extraction products for sealed chamber units

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO	
	L 25	150	P08095000	88,00	
	L 45	150	P08095010	108,00	
	L 100	150	P08095020	157,00	
 Telescopic pipe	L min 39 L max 64	150	P08095030	135,00	
 Pipe with inspection	L 25	150	P08095210	135,00	
 Bend 90°	-	150	P08095040	135,00	
 Bend 45°	-	150	P08095050	114,00	
 Bend 30°	-	150	P08095060	114,00	
 Bend 15°	-	150	P08095070	122,00	
 Roof chimney cap	H 29	150	P08095120	142,00	
 Telescopic wall chimney cap	L min 36,5 L max 58,5	150	P08095110	235,00	
 Chimney weathering	-	150	P08095270	55,00	
 Chimney weathering for flat roof	-	150	P08095080	148,00	
 Chimney weathering for sloped roof from 15° to 30°	-	150	P08095090	271,00	
 Chimney weathering for sloped roof from 30° to 45°	-	150	P08095100	343,00	
	Finishing plate 0° to 10° for sloped ceiling	-	150	P08095170	76,00
	Finishing plate 10° to 30° for sloped ceiling	-	150	P08095180	76,00
	Finishing plate 30° to 40° for sloped ceiling	-	150	P08095190	76,00
	Finishing plate 40° to 50° for sloped ceiling	-	150	P08095200	76,00
 Fire safety plate	-	150	P08095160	76,00	
 Penetration kit for wooden roof/ceiling, inclination from 10° to 40°	-	100/150	PI08095790-0	633,00	
	-	130/200	PI08095800-0	633,00	
 Roof support	-	150	P08095220	76,00	
 Floor support	-	150	P08095230	60,00	
 Quick blocking safety clip	-	150	P08095130	22,00	
 Wall fixing collar	-	150	P08095140	43,00	
 Wall fixing clamp	-	150	P08095150	27,00	

NOTE:

- The installation must employ the coaxial tubes supply by Gruppo Piazzetta S.p.A.
- It is recommended to order a telescopic pipe for every stove
- It is recommended to order a finishing plate for every ceiling.

Piazzetta informs

Majolica

CHARACTERISTICS: in order to appreciate the characteristic, it is necessary to be informed on this prestigious material.

- 1) Aesthetic functionality: the inner steel or cast iron burner is surrounded by majolica shapes and colours.
- 2) As a source of heating: majolica, given its natural semi-refractory characteristics, it resists to heat by accumulating it and diffusing it into the ambient air.

It is easy to understand that the larger the majolica piece the more heat it can radiate. Therefore the few and large sizes of the majolica pieces are to be appreciated for the fact that they distribute heat into the room and over time.

The fabrication of large pieces of majolica necessitates a know-how only achieved through a long experience over years in the field. Just stop to think each it takes 12 to 15 days to make a single piece of majolica, with the manual expertise of a dozen or so qualified ceramic masters. Thus due to the long process and manual craftsmanship put into each piece of majolica made by Piazzetta is considered to be unique piece of art work and no two exactly alike.

Important to note that the finishes (the liquid suspension of minerals, finely ground, applied onto the biscuit, which bake to fusion temperature, create a either glossy or dull finish) which chromatically enhance and beautify the "biscuit" (a name given to clay after its first baking process), are all part of controlled chemical reactions which inevitably leave way to phenomena like crazing, speckles and shading... which are not to be considered defects on the majolica but add characteristics of peculiarity to the final piece.

CRAZING: manifests itself on the enameled surface or in crystallization in an intricate form of cracking more or less visible to the naked eye. This is due to the different dilatation coefficient between enamel and the particular semi refractory principals of the biscuit (not to be confused with other materials like porcelain, stoneware, vitreous, fire clay etc...). The crazing distinguishes and characterizes this type of majolica for its specific usage: to cover a piece of material that radiates heat throughout.

PITTING: is present on the surface of the enamel or the crystalline in the form of pinholes. It is caused by gas bubbles, in the enamel itself or in the biscuit, that emerge on the surface through the vitreous mass during softening.

SHADING: typical of red enamels, it shows as clouds of tiny black dots caused by the chemical reaction of iron oxide present variable in the pigment itself. They are formed during the cooling phase after firing.

Despite the complexity of the multiple and variable results given by this particular, hand made and hand painted product, Gruppo Piazzetta ensures the utmost care in the manufacture and quality control of all its majolica production, which true connoisseurs do not hesitate to define as authentic artworks.

SHADE DIFFERENCES: shade differences might vary according to the shape of the majolica plates even within the same production lot. The biscuit, its shape, and the firing temperatures of each single glaze create colour shades that make each majolica plate unique.

CUSTOMIZATION: customizing the majolica is possible with colors different from the ones indicated and bicolor versions, if possible. In these cases a 30% price increase must be applied.

For majolica customizations it is indispensable to check in advance the feasibility.

GENERAL SALES TERMS AND CONDITIONS

1. SCOPE OF APPLICATION

- 1.1. All sales and deliveries of products ("Products") by GRUPPO PIAZZETTA S.p.A. ("Seller") shall be deemed to be made subject to these General Sales Terms and Conditions ("Conditions") and any contract ("Contract") entered into pursuant to Article 2 shall entail their full acceptance by the purchaser ("Purchaser").
- 1.2. Any derogation from the Conditions shall be valid only if expressly approved in writing by Seller. Unless otherwise agreed in writing, these Conditions shall always prevail over Purchaser's general conditions of purchase, regardless of when they are sent to Purchaser and/or when Seller receives the general conditions of purchase. They shall also prevail over any prior agreement between the parties, in whatever form, which shall be deemed conclusively terminated.

2. ORDERS AND ORDER CONFIRMATIONS

- 2.1. Contracts between Seller and Purchaser are concluded in the following manner: the Seller, upon receipt of a request for Products from the Purchaser ("Order"), sends its offer ("Order Confirmation"). The contract ("Contract") is concluded upon receipt of the Order Confirmation by the Customer.
- 2.2. Orders by Purchaser shall become binding on Seller only if accepted by issuance of the appropriate Order Confirmation.
- 2.3. Purchaser's Order may be revoked by Purchaser until Seller issues Order Confirmation.

3. PRICE AND PAYMENTS

- 3.1. Unless otherwise agreed in writing, sales prices do not include transportation costs and are exclusive of taxes and duties.
- 3.2. Seller reserves the right to request a revision of the price if increases in production costs (with regard to raw materials, labour, and other cost items) in excess of 5% occur during the period between the date of Order Confirmation and the date of invoicing.
- 3.3. Payments shall be made to Seller's domicile in the manner and within the terms set forth in the Order Confirmation and may be collected by Seller's agents only if expressly authorized in writing.
- 3.4. Any issuance of bills of exchange or other instruments of credit, if accepted by Seller, shall always be understood to be subject to collection.
- 3.5. Until full payment of the price, the Products shall remain the property of Seller, who may at any time claim their return.
- 3.6. In the event of non-payment, even partial, on the agreed due dates, for the sole effect of non-payment and therefore without the need for formal notification:
 - a) Late payment interest shall accrue in favour of Seller, from the due date for payment and until actual settlement, at the rate set forth in Article 2 point 6) of EU Directive 2011/7 EU dated 16.2.2011 on combating late payment in commercial transactions, or at the rate set forth in any implementing and transposing legislation that may be applicable in the future.
 - b) Seller may immediately discontinue any further supply even if related to other Contracts;
 - c) Purchaser shall be deemed to have forfeited the benefit of the term, with the consequent right for the Seller to immediately demand payment of the entire claim against it for all supplies made and not yet paid for.

4. DELIVERY AND DELIVERY TERMS.

- 4.1. Delivery terms, estimated at 30 working days from the date of Order Confirmation, are approximate in favour of Seller and are never essential.
- 4.2. Unless otherwise agreed in writing, deliveries shall be deemed Ex Works Seller's warehouse ("Ex Works" - Incoterms® 2020).
- 4.3. Purchaser acknowledges that any delay in the delivery of the Products with respect to the date specified in the Order Confirmation shall never give rise to compensable damages or termination of the Contract.
- 4.4. In any case, the delivery is subject to the punctual execution of the payments agreed and already due, even in relation to previous Orders.
- 4.5. Seller reserves the right to accept the request for delivery of partial Orders.

5. RETURNS AND COMPLAINTS

- 5.1. Any product returns must be authorised in writing by Seller; only if the Products are in perfect condition and unused will 70% of the net price paid by Purchaser be refunded.
- 5.2. Immediately following the delivery of the Products, the Purchaser is required to check the correspondence of the delivered Products with those ordered and to verify that they meet the agreed characteristics.
- 5.3. Purchaser is required to make any complaint or report any defects by communication ("Complaint") by e-mail to info@gruppopiazzetta.com, with attached proof of the non-conformities and a copy of the delivery document of the Products, no later than 8 working days, under penalty of forfeiture, from the receipt of the Products (in case of apparent defect) or from the discovery of the defect (in case of hidden defect).
- 5.4. The notification of the defect must be accompanied by the simultaneous making available of the defective Products, with an indication of where they can be viewed; failure to make the Products available or a Complaint made in a manner that does not comply with the above will cause Purchaser to forfeit the Warranty.
- 5.5. In the event of a Complaint, Seller shall only be obliged to replace within a reasonable period of time those components found to be actually defective and/or lacking the contractual quality, or, at Seller's option, to grant a discount or replace the Product if the defect cannot be remedied. The refundability of the costs of transformation, disassembly and disposal of the Products, as well as the refundability of labour costs and indirect damages, loss of profit, and any additional item of damage is expressly excluded.

6. WARRANTY AND LIABILITY

- 6.1. Seller warrants only that the Products conform to the provisions of (i) the Order Confirmation and (ii) the Product Technical Specifications, to the exclusion of any implied warranties as to quality, functionality or additional features, including merchantability outside the Italian territory, where not expressly mentioned ("Warranty").
- 6.2. The Warranty is provided solely on the condition that the Products are installed, used and stored in accordance with Seller's instructions, recommendations and Technical Data Sheets and are regularly maintained by Seller or its Authorized Technicians.
- 6.3. The Warranty does not cover defects or damage related to installation, maintenance or service activities performed

- by Purchaser or any third party.
- 6.4. The Warranty covers only replacement parts for Product defective components or malfunctions; it does not include components subject to normal wear and tear and consumables such as seals, gaskets, glass parts, etc.
 - 6.5. Unless otherwise agreed in writing, the Warranty shall be valid for the duration of 12 months from delivery of the Product to the Purchaser.
 - 6.6. Seller reserves the right to provide end Customer with a specific manufacturer's warranty, conventional and additional to the legal warranty, with the content and for the period that Seller shall consider appropriate.
 - 6.7. Seller shall be liable to Purchaser only within the limits of the Warranty, with the express exclusion of any liability for direct or indirect damage to persons or property resulting from the transport, installation, maintenance or use of the products supplied, or from their failure or defect, except where the exclusion or limitation of liability is not permitted by law.
 - 6.8. In any event, Seller's liability shall be limited to the value of the sale price contained in the Contract.

7. SECRECY AND TRADEMARKS

- 7.1. Purchaser acknowledges that all trademarks and all intellectual property rights relating to the Products, including but not limited to: patents for inventions, designs or models, utility models, trademarks of which Seller is the owner or licensee, know-how, technical specifications and trade secrets, data and information in any way registered or relating to such rights (collectively "IPRs") are the total and exclusive property of Seller and that their communication or use in the context of the sale or service of a Product does not give rise to any right or claim in respect of them on the part of Purchaser, even after the termination of any business relationship between the Parties.
- 7.2. Purchaser agrees not to engage in any activities inconsistent with Seller's ownership of the IPR, including but not limited to unauthorized alterations and modifications of the Products.
- 7.3. Purchaser will refrain from using and registering trademarks similar to and/or confusable with IPR; and will use Seller's IPR only in accordance with Seller's instructions for the purposes set forth in these Conditions.
- 7.4. Seller's trademarks may also be used directly by Purchaser for advertising purposes, but, in any event, only with Seller's prior written permission
- 7.5. Subject to specific written agreement, the Purchaser may use certain of the Seller's IPRs exclusively in accordance with the Regulations for the Use of Trademarks and Domain Names owned by Gruppo Piazzetta S.p.A., in order to promote the Products and their resale, including through the organization of exhibitions and displays. The use of the Products or IPRs of Gruppo Piazzetta S.p.A. for promotional purposes and for display is at the care and expense of the Purchaser, who agrees to hold the Seller harmless from any damage to the Products, property or persons, as well as from any third party claims.

8. PROHIBITION OF RESALE TO SANCTIONED PARTIES

- 8.1. Purchaser shall not, directly or indirectly, resell, distribute, transfer or otherwise dispose of the Products or any of their components or spare parts to any entity affected by international sanctions or operating in a country blacklisted by competent international authorities.

- 8.2. Purchaser agrees to exercise reasonable control to ensure that any prospective purchaser or recipient of the Products or components or spare parts is not subject to international sanctions or is not located in a blacklisted country. Purchaser will take all necessary steps to verify the compliance status of prospective purchasers or recipients before engaging in any resale activity and will promptly notify Seller in the event of suspicious orders.

9. WAIVER OF TERMINATION INDEMNITY

- 9.1 In the case of repeat orders over time, Purchaser hereby expressly waives, as of now, any right or claim of a compensatory, indemnification or compensatory nature, for any reason whatsoever, including goodwill, arising out of the termination, for any cause whatsoever, of the relationship of purchase or supply of the Products.

10. APPLICABLE LAW AND EXCLUSIVE JURISDICTION

- 10.1 Italian law shall govern the Conditions and any Contract, agreement or dispute arising out of or in connection with them. The Court of Treviso (Italy) shall be the sole place of jurisdiction for any dispute between the Parties concerning the stipulation of the Conditions, the Contract, its clauses, their interpretation, execution or termination, and any contract, agreement or dispute arising from or related thereto, with the express exclusion of any other potentially competent court.
- 10.2 Seller alone shall also have the right to sue in the court of the place where Purchaser is located or where the Products were or should have been delivered.

11. PROCESSING AND PROTECTION OF PERSONAL DATA

- 11.1 Pursuant to and in accordance with Article 13 of EU Regulation no. 679/ 2016 ("General Data Protection Regulation - GDPR"), Seller and Purchaser declare that they have mutually informed each other about: the identity and contact details of the Data Controller; the legal basis, purposes and methods of processing of their respective data; communication and dissemination of personal data to third parties; the period of data retention; mandatory or optional nature of providing data and consequences of any refusal to answer or disclose them; the rights of the Data Subject and in particular the right to object to the processing of data concerning them and/or to obtain the cancellation, transformation, updating, rectification and integration of the same. By signing the Conditions, the parties mutually express their consent, where necessary pursuant to Article 7 of EU Regulation No. 679/ 2016, to the processing of their data in the aforementioned terms and limits. The Purchaser also acknowledges having fully read the aforementioned information notice.

The present price list annuls and replaces all preceding price lists. All products are packaged on non-returnable pallets. Prices are considered to be without VAT (government sales taxes). Gruppo Piazzetta S.p.A. reserves the right to modify and/or delete all printed material, if deemed necessary by Gruppo Piazzetta without any written or prior notice.

