

PRICE LIST



FEBRUARY 2026

PRICE LIST

FEBRUARY 2026

INDEX

Superior product range3

PELLET STOVES

CAMILLA	6
CAROL FG	7
CAROL	8
CHIARA	9
CLEOPE FG	10
CLEOPE.	11
CORINNA FG	12
CORINNA FG TOP	13
CORINNA TG	14
CORINNA TG TOP	15
GINGER	16
LIA	17
MARY FG.	18
MARY	19
MARYON FG	20
MARYON.	21
MELANY	22
MICOL FG	23
MICOL FG TOP	24
MICOL TG	25
MICOL TG TOP	26
MILLY.	27
MOIRA	28
RITA	29
SABRINA	30
SALLY.	31
SOLANGE	32
SONIA	33

PELLET INSERTS

SCP 7.	40
SCP 9.	41
SCP 11	42

PELLET STOVES - THERMO

SABRINA TH	46
----------------------	----

WOOD-BURNING STOVES

MALIKA WITH OVEN	52
MANILA	53
SAMUELA	54
SAVINA WITH OVEN	55
SIBILLA	56
SUSANNA	57

Superior informs. 61

General sales terms and conditions 62

SUPERIOR PRODUCT RANGE

STUFE A PELLET



NOMINAL HEAT OUTPUT	MODEL	FORCED VENTILATION	DUCTABLE	HERMETIC
6,0 kW	CAMILLA	•		•
	CAROL FG	•		•
	CAROL	•		•
	CHIARA	•	•	•
	CLEOPE FG	•		•
	CLEOPE	•		•
	CORINNA FG	•	•	•
	CORINNA TG	•	•	•
7,0 kW	GINGER	•		
8,0 kW	LIA	•	•	•
	MILLY	•	•	
8,5 kW	MARY FG	•		•
	MARY	•		•
	MARYON FG	•		•
	MARYON	•		•
	MELANY	•		•
	MICOL FG	•	•	•
	MICOL TG	•	•	•
	MOIRA	•	•	•
10,2 kW	SALLY	•		
	SABRINA	•		
	SOLANGE	•	•	
	SONIA	•	•	
11,2 kW	RITA	•	•	

PELLET INSERTS



NOMINAL HEAT OUTPUT	MODEL	FORCED VENTILATION
7,0 kW	SCP 7	•
9,0 kW	SCP 9	•
11,0 kW	SCP 11	•

PELLET STOVES - THERMO



NOMINAL WATER OUTPUT	MODEL	THERMO
12,1 kW	SABRINA TH	•

WOOD-BURNING STOVES



NOMINAL HEAT OUTPUT	MODEL	WOOD-BURNING	WOOD-BURNING WITH OVEN
6,0 kW	MANILA	•	
6,2 kW	MALIKA WITH OVEN		•
8,0 kW	SIBILLA	•	
	SAVINA WITH OVEN		•
8,5 kW	SAMUELA	•	
	SUSANNA	•	

PELLET STOVES

CAMILLA6
CAROL FG7
CAROL8
CHIARA9
CLEOPE FG	10
CLEOPE.	11
CORINNA FG12
CORINNA FG TOP	13
CORINNA TG14
CORINNA TG TOP	15
GINGER	16
LIA	17
MARY FG.	18
MARY	19
MARYON FG	20
MARYON.	21
MELANY	22
MICOL FG23
MICOL FG TOP	24
MICOL TG25
MICOL TG TOP	26
MILLY	27
MOIRA28
RITA	29
SABRINA	30
SALLY	31
SOLANGE	32
SONIA	33
Accessories	34

PELLET STOVES

CAMILLA



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top cast iron
- Stove airtight, steel
- Firebox steel
- Upper baffle plate Skamolex
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner


TECHNICAL DATA

- Model CAMILLA
- Type SP450-01
- Energy efficiency class A+
- Room heating capacity m³ 100 - 175
- Nominal heat output (min - max) kW 2,8 - 6,0
- Thermal efficiency (min - max) % 90,3 - 91,3
- Consumption (min - max) kg/h 0,64 - 1,36
- Standard flue outlet Ø mm 80
- Hopper capacity kg 16,5
- Dimensions W x D x H mm 516 x 485 x 958
- Stove weight kg 90
- PMnom (13% O₂) mg/Nm³ 13
- OGCnom (13% O₂) mg/Nm³ 1




		TOTAL PRICE	
Total price including stove and painted steel cladding		2.410,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07600100C	2.410,00
	BORDEAUX	S07600200C	2.410,00
	NERO	S07600300C	2.410,00
ACCESSORIES ON REQUEST	CODE	EURO	
EASY Remote control	N08013030C	80,00	
Right-hand or left-hand side flue kit	N08011035C	95,00	
Top flue kit	N08011033C	295,00	
Top coaxial flue kit	N08011031C	450,00	
Humidifier	N08019053C	25,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
		per linear metre	


CAMILLA version with rear flue outlet, standard

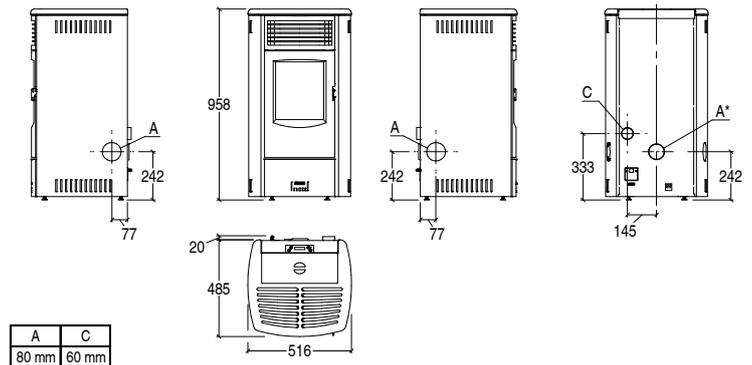

CAMILLA version with top flue outlet, optional

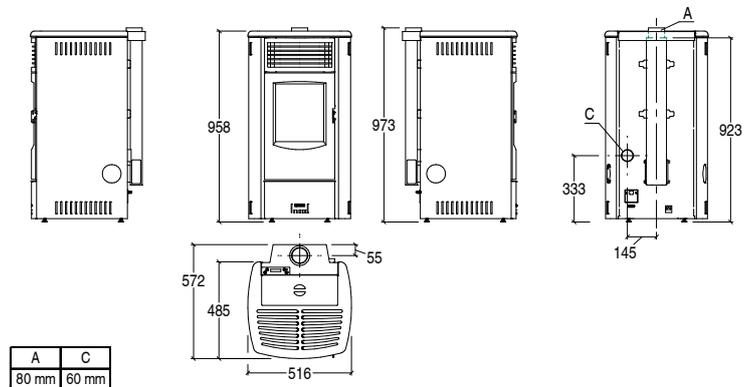

CAMILLA version with coaxial flue outlet, optional

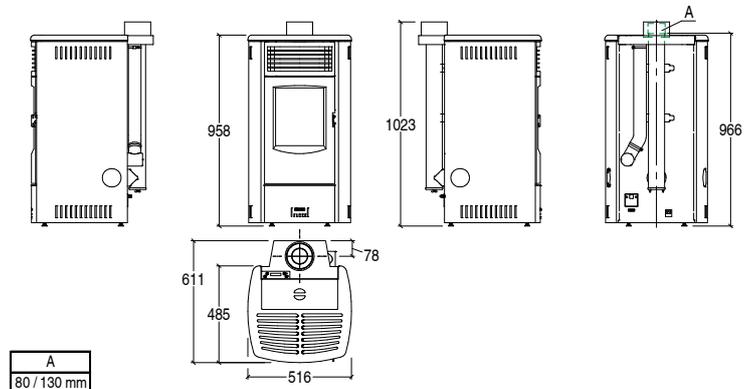

All drawing dimensions in mm.

PELLET STOVES

CAROL FG



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top painted steel
- Stove airtight, steel
- Firebox cast iron
- Upper baffle plate Skamolox
- Brazier cast iron
- Door steel with screen-printed tempered glass
- Aesthetic door painted steel, detachable
- Door handle ceramic glass, resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner


TECHNICAL DATA

- Model CAROL FG
- Type SP450-03
- Energy efficiency class A+
- Room heating capacity m³ 100 - 175
- Nominal heat output (min - max) kW 2,8 - 6,0
- Thermal efficiency (min - max) % 89,1 - 90,8
- Consumption (min - max) kg/h 0,66 - 1,37
- Standard flue outlet Ø mm 80
- Hopper capacity kg 16,5
- Dimensions W x D x H mm 538 x 545 x 958
- Stove weight kg 96
- PMnom (13% O₂) mg/Nm³ 14
- OGCnom (13% O₂) mg/Nm³ 1




		TOTAL PRICE	
Total price including stove and painted steel cladding		3.285,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07611100C	3.285,00
	BORDEAUX	S07611200C	3.285,00
	NERO	S07611300C	3.285,00
ACCESSORIES ON REQUEST	CODE	EURO	
EASY Remote control	N08013033C	80,00	
Right-hand or left-hand side flue kit	N08011035C	95,00	
Top flue kit	N08011043C	295,00	
Top coaxial flue kit	N08011039C	450,00	
Humidifier	N08019053C	25,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
		per linear metre	


CAROL FG version with rear flue outlet, standard

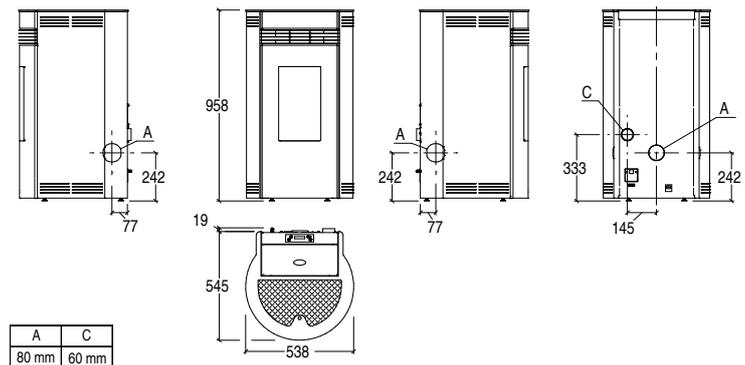

CAROL FG version with top flue outlet, optional

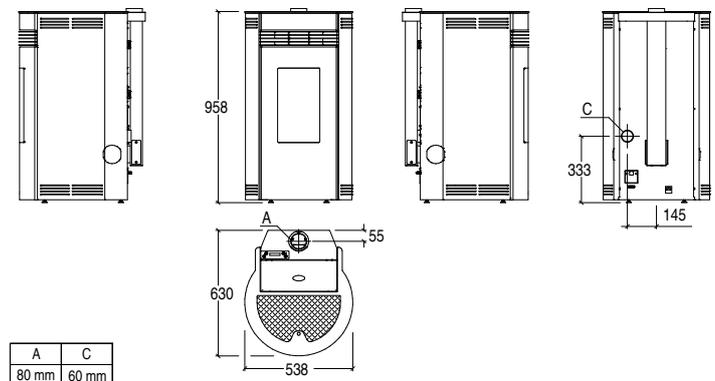

CAROL FG version with coaxial flue outlet, optional

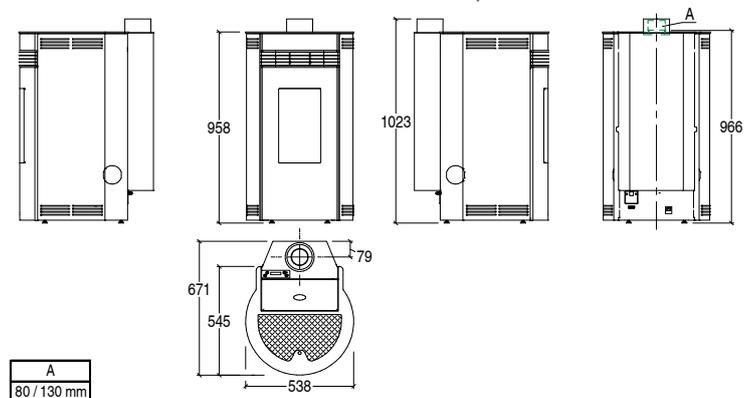

All drawing dimensions in mm.

PELLET STOVES

CAROL



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top cast iron
- Stove airtight, steel
- Firebox steel
- Upper baffle plate Skamolex
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model CAROL
- Type SP450-01
- Energy efficiency class A+
- Room heating capacity m³ 100 - 175
- Nominal heat output (min - max) kW 2,8 - 6,0
- Thermal efficiency (min - max) % 90,3 - 91,3
- Consumption (min - max) kg/h 0,64 - 1,36
- Standard flue outlet Ø mm 80
- Hopper capacity kg 16,5
- Dimensions W x D x H mm 530 x 524 x 958
- Stove weight kg 86
- PMnom (13% O₂) mg/Nm³ 13
- OGCnom (13% O₂) mg/Nm³ 1




Total price including stove and painted steel cladding **2.500,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07610100C	2.500,00
BORDEAUX	S07610200C	2.500,00
NERO	S07610300C	2.500,00


ACCESSORIES ON REQUEST	CODE	EURO
EASY Remote control	N08013030C	80,00
Right-hand or left-hand side flue kit	N08011035C	95,00
Top flue kit	N08011033C	295,00
Top coaxial flue kit	N08011031C	450,00
Humidifier	N08019053C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre


CAROL version with rear flue outlet, standard

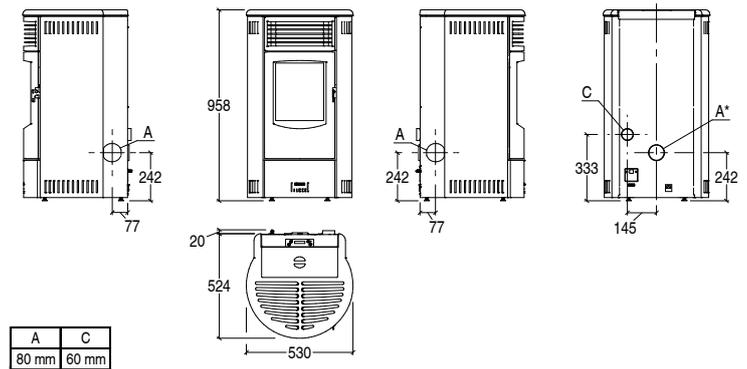

CAROL version with top flue outlet, optional

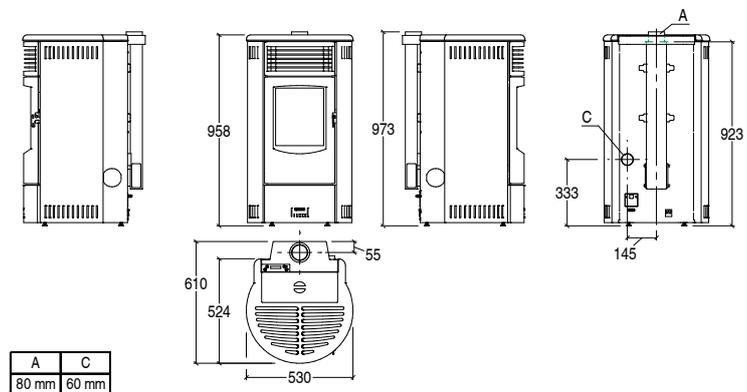

CAROL version with coaxial flue outlet, optional

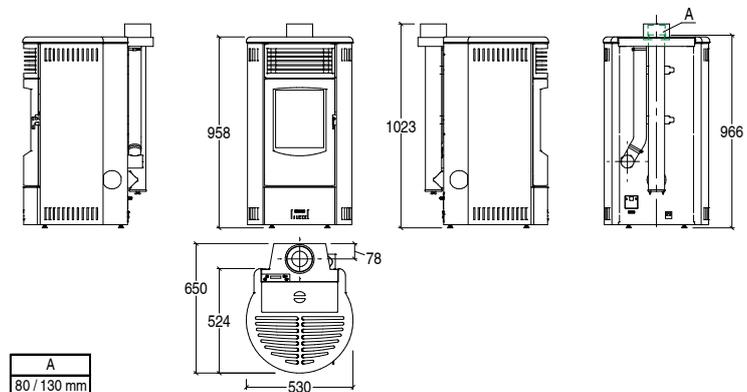

All drawing dimensions in mm.

PELLET STOVES

CHIARA



- FORCED VENTILATION
- HERMETIC
- NATURAL HEATING
- WIFI BLUETOOTH
- DUCTABLE

GENERAL CHARACTERISTICS

- | | |
|---|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WIFI- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation painting steel painting steel airtight, steel cast iron Skamolex cast iron cast iron with ceramic glass resistant up to 750°C painting steel detachable handle yes rear standard 6 daily time frames front upper yes yes continuous air flow optional standard yes yes yes yes yes standard optional 5 wall - corner |
|---|--|

TECHNICAL DATA *

- | | |
|--|--|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output (min - max) • Thermal efficiency (min - max) • Consumption (min - max) • Standard flue outlet Ø • Hopper capacity • Dimensions W x D x H • Stove weight | <ul style="list-style-type: none"> CHIARA SP450-19A A+ m³ 100 - 175 kW 2,7 - 6,0 % ≥ 91 - ≥ 91 kg/h 0,63 - 1,36 mm 80 kg 16,5 mm 536 x 528 x 1052 kg 112 |
|--|--|



* Product currently being certified


TOTAL PRICE

Total price including stove and painted steel cladding **2.975,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07670100C	2.975,00
GRIGIO	S07670300C	2.975,00
NERO	S07670200C	2.975,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018004C	260,00
EASY Remote control	N08013030C	80,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

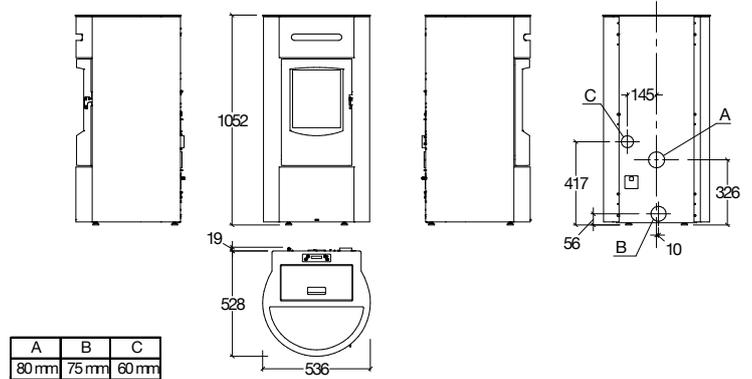

All drawing dimensions in mm.

PELLET STOVES

CLEOPE FG



GENERAL CHARACTERISTICS

- Heating
- Cladding
- Top
- Stove
- Firebox
- Upper baffle plate
- Brazier
- Door
- Aesthetic door
- Door handle
- Ceramic glass
- Removable ash drawer
- Standard flue outlet position
- Optional flue outlet
- Ambient probe for temperature control
- Programmable timer-thermostat
- Warm air outlets
- Humidifier
- Pellet level indicator
- Brazier cleaning intervals
- Glass cleaning system
- Module WiFi- Bluetooth® for App MYSUPERIOR
- Energy Saving
- Eco Function
- Night mode
- Pellet Quality System Function
- Air Combustion System Function
- Combustion air kit
- Optional remote control
- Power levels
- Installation

forced ventilation
 painted steel
 painted steel
 airtight, steel
 cast iron
 Skamolex
 cast iron
 cast iron
 steel with screen-printed tempered glass
 painted steel, detachable
 resistant up to 750°C
 yes
 rear
 RH side - LH side - top - top coaxial
 standard
 6 daily time frames
 front upper
 optional
 yes
 yes
 continuous air flow
 standard
 yes
 yes
 yes
 yes
 yes
 standard
 optional
 5
 wall - corner

TECHNICAL DATA


- Model
- Type
- Energy efficiency class
- Room heating capacity
- Nominal heat output (min - max)
- Thermal efficiency (min - max)
- Consumption (min - max)
- Standard flue outlet Ø
- Hopper capacity
- Dimensions W x D x H
- Stove weight
- PMnom (13% O₂)
- OGCnom (13% O₂)

CLEOPE FG
 SP450-03
 A+
 m³ 100 - 175
 kW 2,8 - 6,0
 % 89,1 - 90,8
 kg/h 0,66 - 1,37
 mm 80
 kg 16,5
 mm 500 x 515 x 958
 kg 96
 mg/Nm³ 14
 mg/Nm³ 1




			TOTAL PRICE
Total price including stove and painted steel cladding			3.285,00
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07621100C	3.285,00
	BORDEAUX	S07621200C	3.285,00
	NERO	S07621300C	3.285,00
ACCESSORIES ON REQUEST	CODE	EURO	
EASY Remote control	N08013033C	80,00	
Right-hand or left-hand side flue kit	N08011035C	95,00	
Top flue kit	N08011043C	295,00	
Top coaxial flue kit	N08011039C	450,00	
Humidifier	N08019053C	25,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
			per linear metre


CLEOPE FG version with rear flue outlet, standard

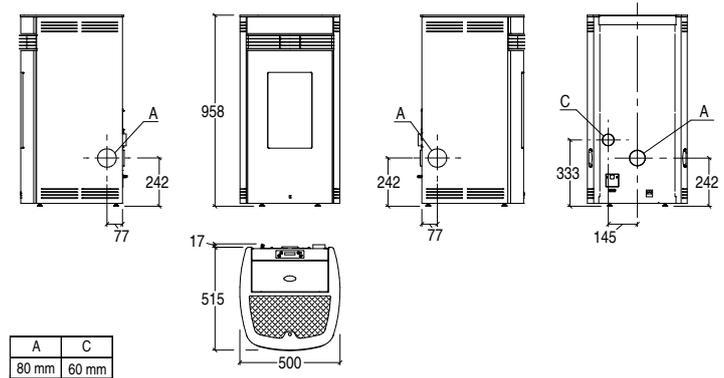

CLEOPE FG version with top flue outlet, optional

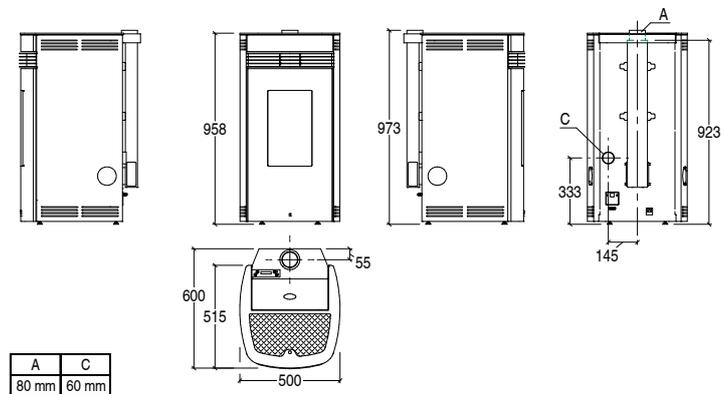

CLEOPE FG version with coaxial flue outlet, optional

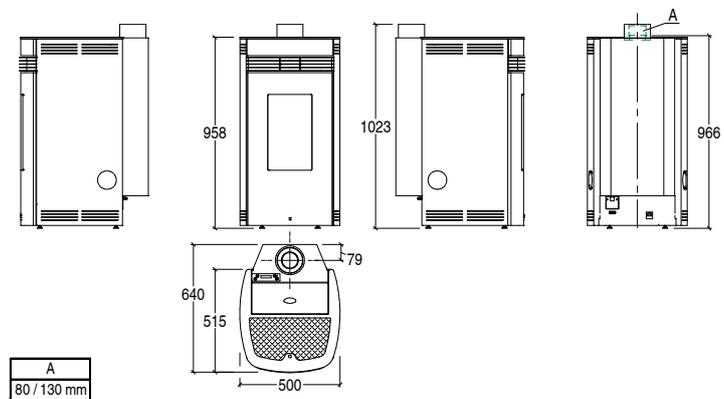

All drawing dimensions in mm.

PELLET STOVES

CLEOPE



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top cast iron
- Stove airtight, steel
- Firebox steel
- Upper baffle plate Skamolox
- Brazier cast iron
- Door cast iron
- Aesthetic door steel
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model CLEOPE
- Type SP450-01
- Energy efficiency class A+
- Room heating capacity m³ 100 - 175
- Nominal heat output (min - max) kW 2,8 - 6,0
- Thermal efficiency (min - max) % 90,3 - 91,3
- Consumption (min - max) kg/h 0,64 - 1,36
- Standard flue outlet Ø mm 80
- Hopper capacity kg 16,5
- Dimensions W x D x H mm 500 x 515 x 958
- Stove weight kg 96
- PM_{nom} (13% O₂) mg/Nm³ 13
- OG_{Cnom} (13% O₂) mg/Nm³ 1



TOTAL PRICE


Total price including stove and painted steel cladding 2.790,00

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07620100C	2.790,00
BORDEAUX	S07620200C	2.790,00
NERO	S07620300C	2.790,00


ACCESSORIES ON REQUEST	CODE	EURO
EASY Remote control	N08013033C	80,00
Right-hand or left-hand side flue kit	N08011035C	95,00
Top flue kit	N08011033C	295,00
Top coaxial flue kit	N08011031C	450,00
Humidifier	N08019053C	25,00
Protection kit	S08012970C	80,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre


CLEOPE version with rear flue outlet, standard

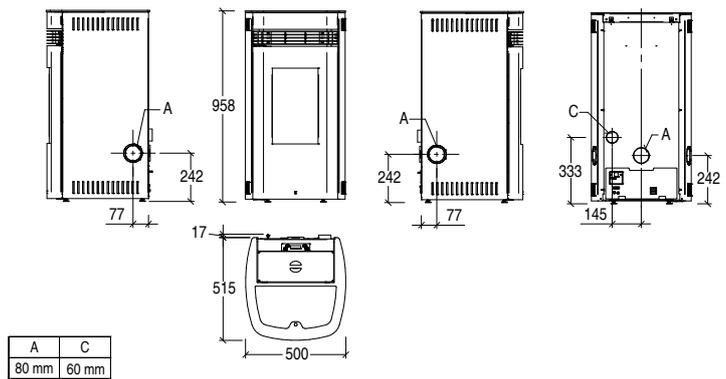

CLEOPE version with top flue outlet, optional

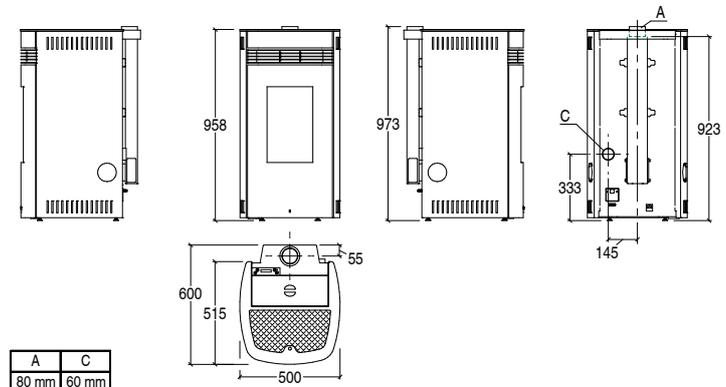

CLEOPE version with coaxial flue outlet, optional

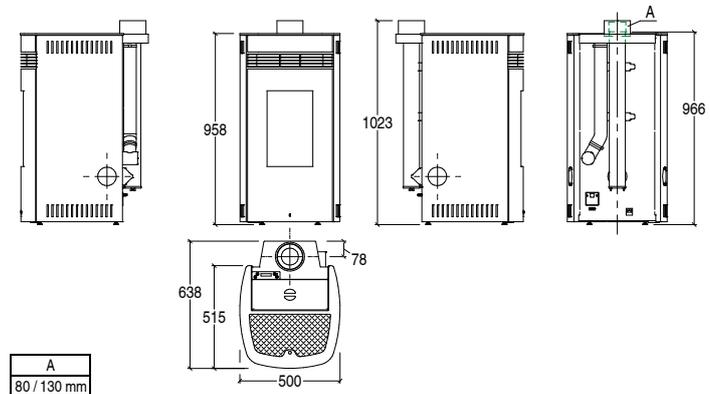

All drawing dimensions in mm.

PELLET STOVES

CORINNA FG



- FORCED VENTILATION**
- HERMETIC**
- NATURAL HEATING**
- WIFI BLUETOOTH**
- DUCTABLE**

GENERAL CHARACTERISTICS

- | | |
|---|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation painted steel painted steel airtight, steel cast iron Skamolox cast iron cast iron with ceramic glass resistant up to 750°C with screen-printed tempered glass painted steel detachable handle yes rear standard 6 daily time frames front upper frames optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|---|---|

TECHNICAL DATA *

- | | |
|--|--------------------------|
| • Model | CORINNA FG |
| • Type | SP450-25A |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 100 - 175 |
| • Nominal heat output (min - max) | kW 2,8 - 6,0 |
| • Thermal efficiency (min - max) | % 93 - 94 |
| • Consumption (min - max) | kg/h 0,63 - 1,36 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 15,5 |
| • Dimensions W x D x H | mm 544 x 546 x 1153 |
| • Stove weight | kg 160 |
| • PM ₁₀ (13% O ₂) | mg/Nm ³ 10 |
| • OG _{Cnom} (13% O ₂) | mg/Nm ³ 1 |



* Product currently being certified


TOTAL PRICE

Total price including stove and painted steel cladding **4.035,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07686100C	4.035,00
GRIGIO	S07686300C	4.035,00
NERO	S07686200C	4.035,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

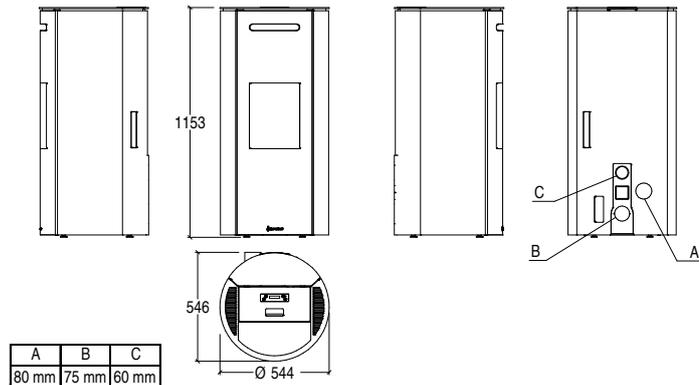

All drawing dimensions in mm.

PELLET STOVES

CORINNA FG TOP



- FORCED VENTILATION
- HERMETIC
- NATURAL HEATING
- WIFI BLUETOOTH
- DUCTABLE

GENERAL CHARACTERISTICS

- | | |
|---|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation painting steel painting steel airtight, steel cast iron Skamolex cast iron cast iron with ceramic glass resistant up to 750°C with screen-printed tempered glass painting steel detachable handle yes top - top coaxial, integrated standard 6 daily time frames front upper optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|---|--|

TECHNICAL DATA

- | | |
|-----------------------------------|--------------------------|
| • Model | CORINNA FG TOP |
| • Type | SP451-23A |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 100 - 175 |
| • Nominal heat output (min - max) | kW 2,8 - 6,0 |
| • Thermal efficiency (min - max) | % 93 - 94 |
| • Consumption (min - max) | kg/h 0,63 - 1,36 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 15,5 |
| • Dimensions W x D x H | mm 544 x 544 x 1153 |
| • Stove weight | kg 160 |
| • PMnom (13% O ₂) | mg/Nm ³ 10 |
| • OGCnom (13% O ₂) | mg/Nm ³ 1 |




TOTAL PRICE

Total price including stove and painted steel cladding **4.305,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07681100C	4.305,00
GRIGIO	S07681300C	4.305,00
NERO	S07681200C	4.305,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

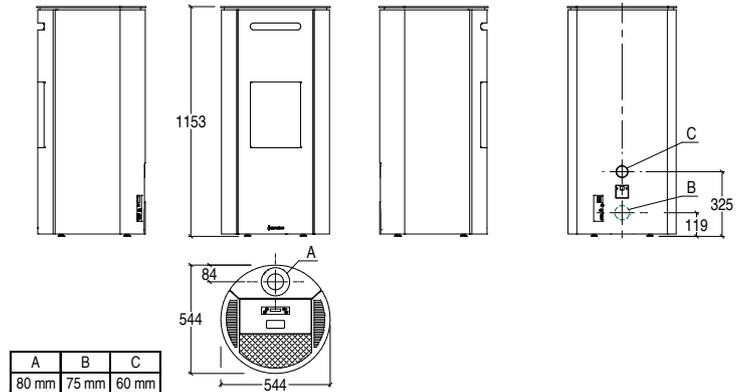

All drawing dimensions in mm.

PELLET STOVES

CORINNA TG



- FORCED VENTILATION**
- HERMETIC**
- NATURAL HEATING**
- WiFi BLUETOOTH**
- DUCTABLE**

GENERAL CHARACTERISTICS

- | | |
|---|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> duct forced ventilation glass painting steel airtight, steel cast iron Skamolox cast iron cast iron with ceramic glass resistant up to 750°C with screen-printed tempered glass painting steel detachable handle yes rear standard 6 daily time frames front upper optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|---|--|

TECHNICAL DATA *

- | | |
|-----------------------------------|--------------------------|
| • Model | CORINNA TG |
| • Type | SP450-25A |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 100 - 175 |
| • Nominal heat output (min - max) | kW 2,8 - 6,0 |
| • Thermal efficiency (min - max) | % 93 - 94 |
| • Consumption (min - max) | kg/h 0,63 - 1,36 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 15,5 |
| • Dimensions W x D x H | mm 544 x 546 x 1153 |
| • Stove weight | kg 160 |
| • PMnom (13% O ₂) | mg/Nm ³ 10 |
| • OGCnom (13% O ₂) | mg/Nm ³ 1 |



* Product currently being certified


TOTAL PRICE

Total price including stove and painted steel cladding **4.035,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding NERO	S07686500C	4.035,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

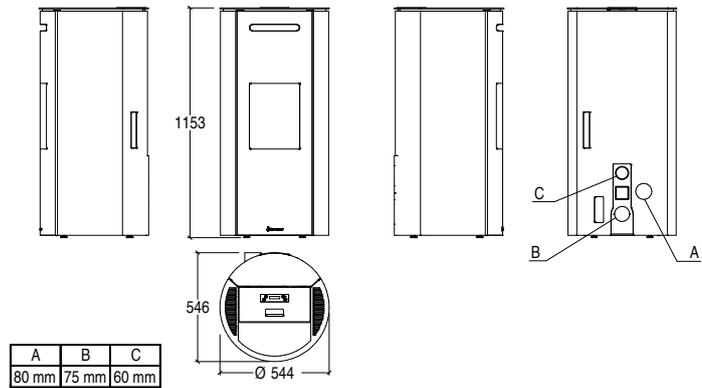

All drawing dimensions in mm.

PELLET STOVES

CORINNA TG TOP



- FORCED VENTILATION
- HERMETIC
- NATURAL HEATING
- WIFI BLUETOOTH
- DUCTABLE

GENERAL CHARACTERISTICS

- | | |
|---|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation glass painted steel airtight, steel cast iron Skamolox cast iron cast iron with ceramic glass resistant up to 750°C with screen-printed tempered glass painting steel detachable handle yes top - top coaxial, integrated standard 6 daily time frames front upper optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|---|--|

TECHNICAL DATA

- | | |
|-----------------------------------|--------------------------|
| • Model | CORINNA TG TOP |
| • Type | SP451-23A |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 100 - 175 |
| • Nominal heat output (min - max) | kW 2,8 - 6,0 |
| • Thermal efficiency (min - max) | % 93 - 94 |
| • Consumption (min - max) | kg/h 0,63 - 1,36 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 15,5 |
| • Dimensions W x D x H | mm 544 x 544 x 1153 |
| • Stove weight | kg 160 |
| • PMnom (13% O ₂) | mg/Nm ³ 10 |
| • OGCnom (13% O ₂) | mg/Nm ³ 1 |




TOTAL PRICE

Total price including stove and painted steel cladding **4.305,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding NERO	S07681500C	4.305,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

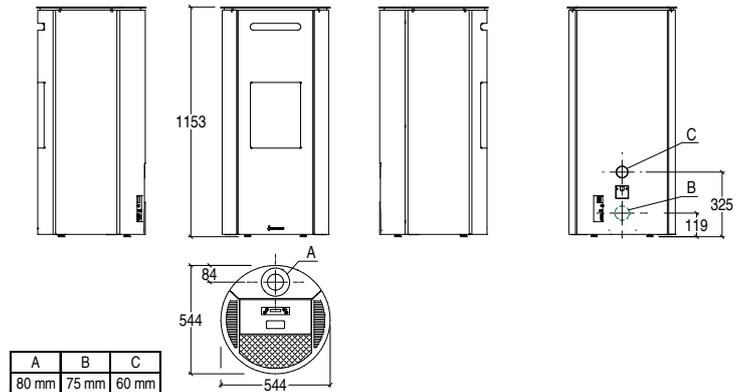

All drawing dimensions in mm.

PELLET STOVES

LIA



- FORCED VENTILATION**
- HERMETIC**
- NATURAL HEATING**
- DUCTABLE**
- WiFi BLUETOOTH OPTIONAL**

GENERAL CHARACTERISTICS

- | | |
|---|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Optional flue outlet • Display with digital controls • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation • Flush installation | <ul style="list-style-type: none"> ductable forced ventilation painted steel majolica airtight, steel cast iron cast iron cast iron cast iron cast iron resistant up to 750°C yes RH rear - top right top central - top right - RH side yes standard 6 daily time frames front upper optional optional yes yes continuous air flow optional optional yes yes yes yes yes standard optional 4 wall yes |
|---|---|

TECHNICAL DATA

- | | |
|--|---|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output (min - max) • Thermal efficiency (min - max) • Consumption (min - max) • Standard flue outlet Ø • Hopper capacity • Dimensions W x D x H • Stove weight • PM₁₀ (13% O₂) • OGC_{nom} (13% O₂) | <ul style="list-style-type: none"> LIA-S SP124-01 A+ m³ 135 - 230 kW 3,7 - 8,0 % 88,5 - 88,7 kg/h 0,86 - 1,85 mm 80 kg 17 mm 890 x 288 x 1125 kg 120 mg/Nm³ 15 mg/Nm³ 1 |
|--|---|



TOTAL PRICE

Total price including stove and painted steel cladding **3.555,00**


MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07330510C 3.555,00
	BORDEAUX	S07330520C 3.555,00
	GRIGIO	S07330530C 3.555,00

ACCESSORIES ON REQUEST	CODE	EURO
Wi-Fi module for control with Superior App	N08013013C	315,00
Hot air ducting kit	S08012600C	275,00
Remote control	S08010900C	65,00
Right-hand side flue kit	N08011047C	25,00
Top right-hand flue kit	N08011046C	95,00
Top central flue kit	N08011045C	240,00
Humidifier	S08010910C	30,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

If the ducting kit is installed, the Night Mode cannot be activated.

If a remote control is installed, a GPRS module and Wi-Fi cannot be installed.

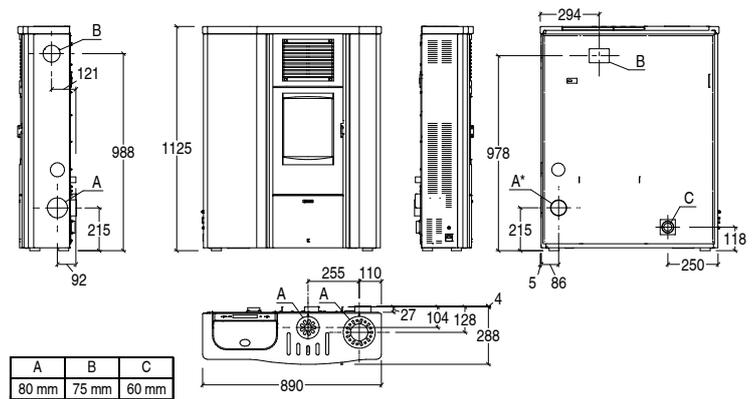

All drawing dimensions in mm.

PELLET STOVES

MARY FG



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top painted steel
- Stove airtight, steel
- Firebox cast iron
- Upper baffle plate Skamolex
- Brazier cast iron
- Door steel with screen-printed tempered glass
- Aesthetic door painted steel, detachable
- Door handle ceramic glass, resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model MARY FG
- Type SP450-04
- Energy efficiency class A+
- Room heating capacity m³ 145 - 245
- Nominal heat output (min - max) kW 3,3 - 8,5
- Thermal efficiency (min - max) % 88,4 - 91,5
- Consumption (min - max) kg/h 0,77 - 1,92
- Standard flue outlet Ø mm 80
- Hopper capacity kg 22
- Dimensions W x D x H mm 500 x 515 x 1048
- Stove weight kg 98
- PMnom (13% O₂) mg/Nm³ 13
- OGCnom (13% O₂) mg/Nm³ 1




Total price including stove and painted steel cladding **3.485,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07721100C	3.485,00
BORDEAUX	S07721200C	3.485,00
NERO	S07721300C	3.485,00


ACCESSORIES ON REQUEST	CODE	EURO
EASY Remote control	N08013033C	80,00
Right-hand or left-hand side flue kit	N08011035C	95,00
Top flue kit	N08011044C	295,00
Top coaxial flue kit	N08011040C	450,00
Humidifier	N08019053C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre


MARY FG version with rear flue outlet, standard

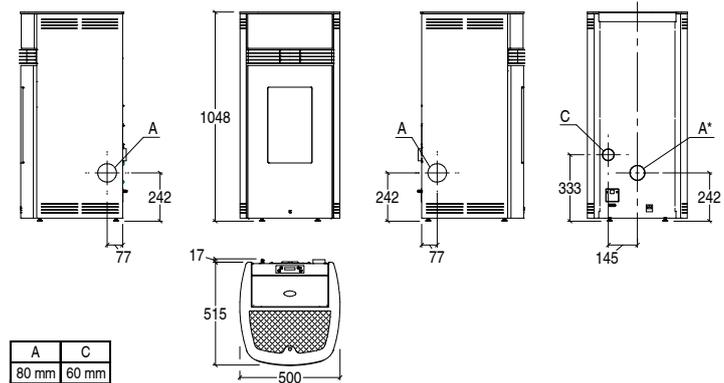

MARY FG version with top flue outlet, optional

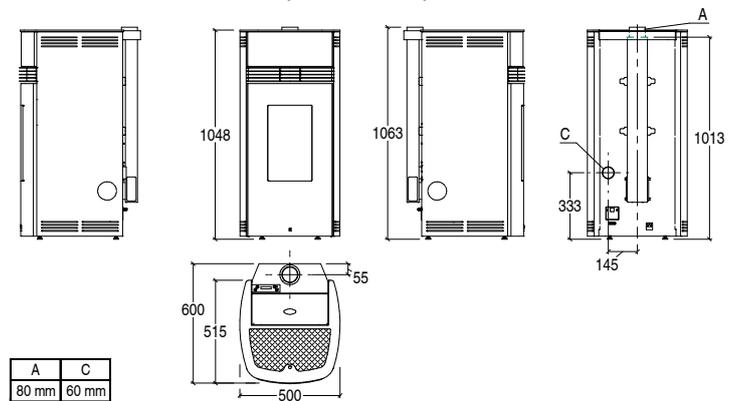

MARY FG version with coaxial flue outlet, optional

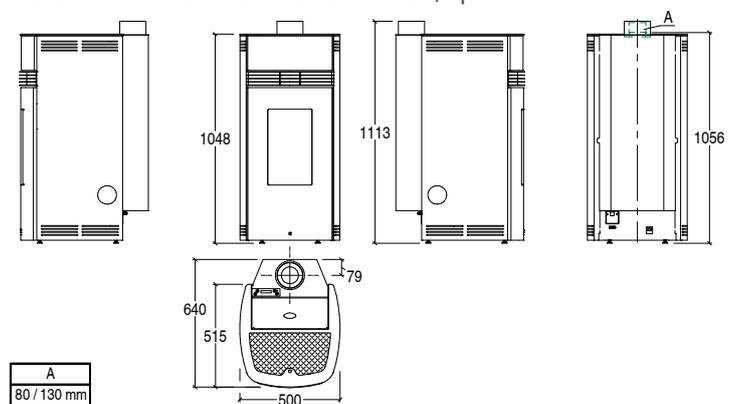

All drawing dimensions in mm.

PELLET STOVES

MARY



FORCED VENTILATION



HERMETIC



NATURAL HEATING



WIFI BLUETOOTH



TOP FLUE OUTLET / TOP COAXIAL OPTIONAL

GENERAL CHARACTERISTICS

- | | |
|---|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Optional flue outlet • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Module WIFI- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <p>forced ventilation
painted steel
painted steel
airtight, steel
steel
Skamolex
cast iron
cast iron
steel
painted steel, detachable
resistant up to 750°C
yes
rear
RH side - LH side - top - top coaxial
standard
6 daily time frames
front upper
optional
yes
yes
continuous air flow
standard
yes
yes
yes
yes
yes
standard
optional
5
wall - corner</p> |
|---|--|

TECHNICAL DATA

- | | |
|---|--|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output (min - max) • Thermal efficiency (min - max) • Consumption (min - max) • Standard flue outlet Ø • Hopper capacity • Dimensions W x D x H • Stove weight • PMnom (13% O₂) • OGCnom (13% O₂) | <p>MARY
SP450-02
A+
m³ 145 - 245
kW 3,3 - 8,5
% 89,3 - 91,2
kg/h 0,76 - 1,93
mm 80
kg 22
mm 500 x 515 x 1048
kg 82
mg/Nm³ 14
mg/Nm³ 1</p> |
|---|--|



TOTAL PRICE


Total price including stove and painted steel cladding **2.975,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07720100C	2.975,00
BORDEAUX	S07720200C	2.975,00
NERO	S07720300C	2.975,00


ACCESSORIES ON REQUEST	CODE	EURO
EASY Remote control	N08013033C	80,00
Right-hand or left-hand side flue kit	N08011035C	95,00
Top flue kit	N08011034C	295,00
Top coaxial flue kit	N08011032C	450,00
Humidifier	N08019053C	25,00
Protection kit	S08012970C	80,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre


MARY version with rear flue outlet, standard

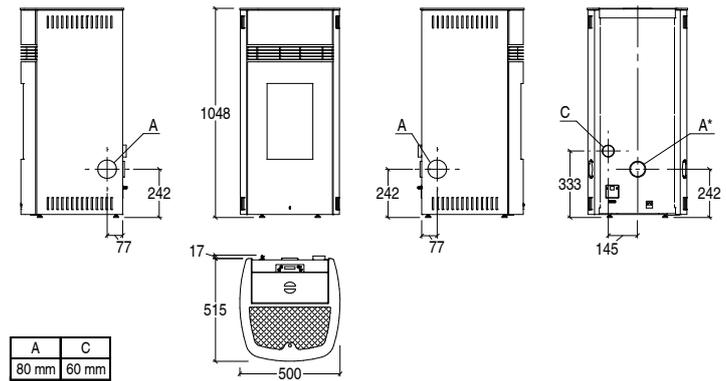

MARY version with top flue outlet, optional

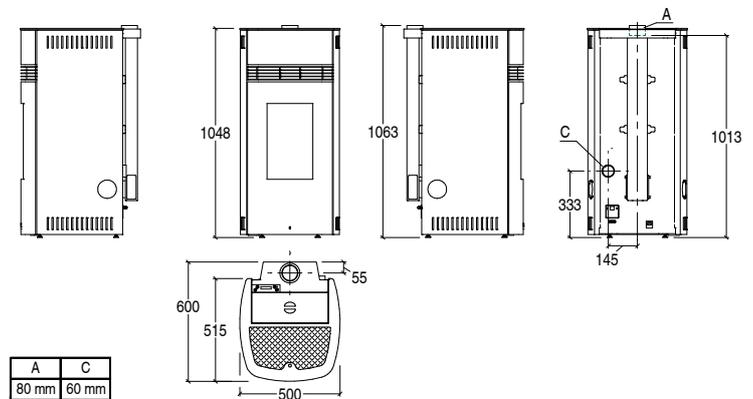

MARY version with coaxial flue outlet, optional

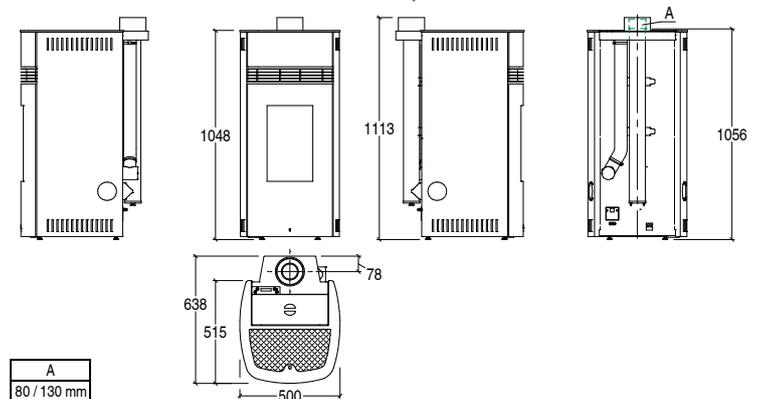

All drawing dimensions in mm.

PELLET STOVES

MARYON FG



GENERAL CHARACTERISTICS

- Heating
- Cladding
- Top
- Stove
- Firebox
- Upper baffle plate
- Brazier
- Door
- Aesthetic door
- Door handle
- Ceramic glass
- Removable ash drawer
- Standard flue outlet position
- Optional flue outlet
- Ambient probe for temperature control
- Programmable timer-thermostat
- Warm air outlets
- Humidifier
- Pellet level indicator
- Brazier cleaning intervals
- Glass cleaning system
- Module WiFi- Bluetooth® for App MYSUPERIOR
- Energy Saving
- Eco Function
- Night mode
- Pellet Quality System Function
- Air Combustion System Function
- Combustion air kit
- Optional remote control
- Power levels
- Installation

forced ventilation
 painted steel
 painted steel
 airtight, steel
 cast iron
 Skamolox
 cast iron
 cast iron
 steel with screen-printed tempered glass
 painted steel, detachable
 resistant up to 750°C
 yes
 rear
 RH side - LH side - top - top coaxial
 standard
 6 daily time frames
 front upper
 optional
 yes
 yes
 continuous air flow
 standard
 yes
 yes
 yes
 yes
 yes
 yes
 standard
 optional
 5
 wall - corner

TECHNICAL DATA


- Model
- Type
- Energy efficiency class
- Room heating capacity
- Nominal heat output (min - max)
- Thermal efficiency (min - max)
- Consumption (min - max)
- Standard flue outlet Ø
- Hopper capacity
- Dimensions W x D x H
- Stove weight
- PMnom (13% O₂)
- OGCnom (13% O₂)

MARYON FG
 SP450-04
 A+
 m³ 145 - 245
 kW 3,3 - 8,5
 % 88,4 - 91,5
 kg/h 0,77 - 1,92
 mm 80
 kg 22
 mm 540 x 545 x 1048
 kg 98
 mg/Nm³ 13
 mg/Nm³ 1




		TOTAL PRICE	
Total price including stove and painted steel cladding		3.485,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07711100C	3.485,00
	BORDEAUX	S07711200C	3.485,00
	NERO	S07711300C	3.485,00
ACCESSORIES ON REQUEST	CODE	EURO	
EASY Remote control	N08013033C	80,00	
Right-hand or left-hand side flue kit	N08011035C	95,00	
Top flue kit	N08011044C	295,00	
Top coaxial flue kit	N08011040C	450,00	
Humidifier	N08019053C	25,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
		per linear metre	


MARYON FG version with rear flue outlet, standard

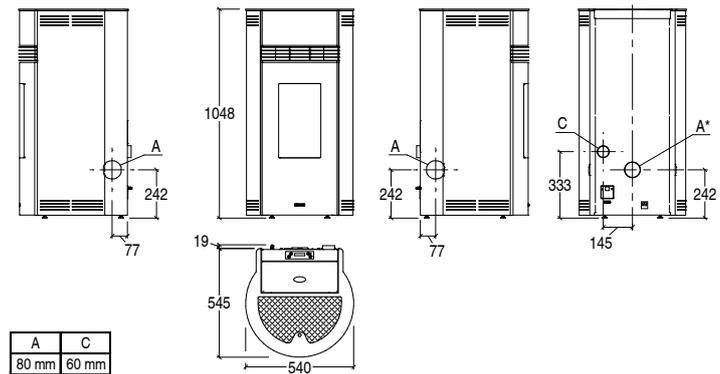

MARYON FG version with top flue outlet, optional

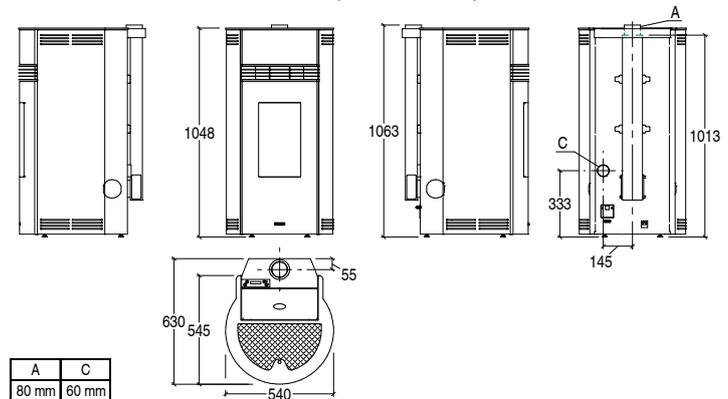

MARYON FG version with coaxial flue outlet, optional

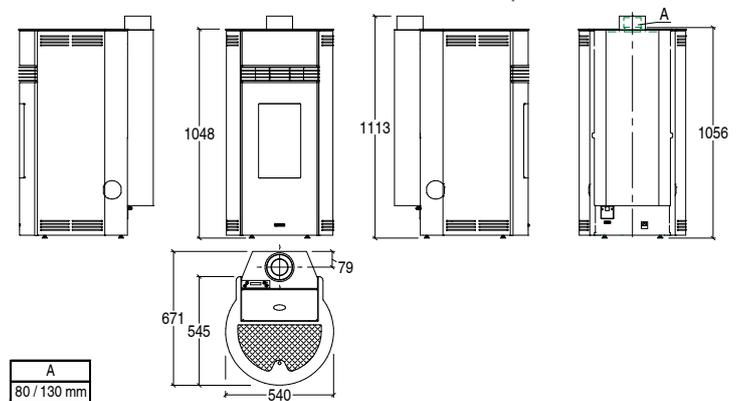

All drawing dimensions in mm.

PELLET STOVES

MARYON



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top cast iron
- Stove airtight, steel
- Firebox steel
- Upper baffle plate Skamolex
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model MARYON
- Type SP450-02
- Energy efficiency class A+
- Room heating capacity m³ 145 - 245
- Nominal heat output (min - max) kW 3,3 - 8,5
- Thermal efficiency (min - max) % 89,3 - 91,2
- Consumption (min - max) kg/h 0,76 - 1,93
- Standard flue outlet Ø mm 80
- Hopper capacity kg 22
- Dimensions W x D x H mm 530 x 524 x 1048
- Stove weight kg 98
- PMnom (13% O₂) mg/Nm³ 14
- OGCnom (13% O₂) mg/Nm³ 1



TOTAL PRICE


Total price including stove and painted steel cladding **2.715,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07710100C	2.715,00
BORDEAUX	S07710200C	2.715,00
NERO	S07710300C	2.715,00


ACCESSORIES ON REQUEST	CODE	EURO
EASY Remote control	N08013030C	80,00
Right-hand or left-hand side flue kit	N08011035C	95,00
Top flue kit	N08011034C	295,00
Top coaxial flue kit	N08011032C	450,00
Humidifier	N08019053C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre


MARYON version with rear flue outlet, standard

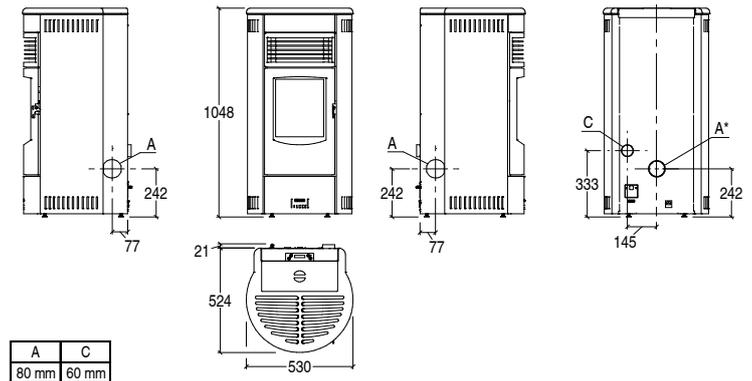

MARYON version with top flue outlet, optional

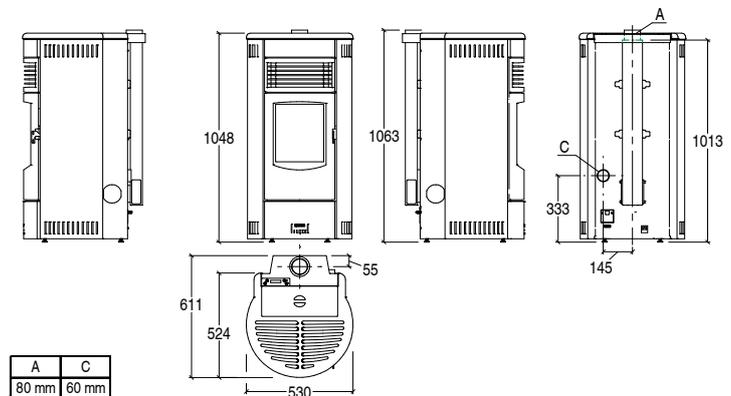

MARYON version with coaxial flue outlet, optional

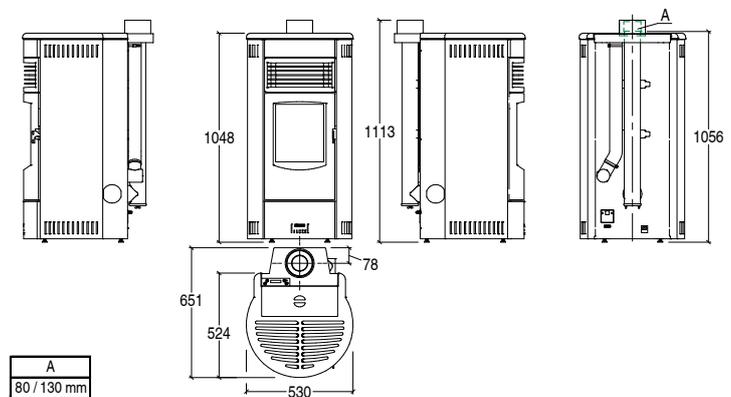

All drawing dimensions in mm.

PELLET STOVES

MELANY



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top cast iron
- Stove airtight, steel
- Firebox steel
- Upper baffle plate Skamolex
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model MELANY
- Type SP450-02
- Energy efficiency class A+
- Room heating capacity m³ 145 - 245
- Nominal heat output (min - max) kW 3,3 - 8,5
- Thermal efficiency (min - max) % 89,3 - 91,2
- Consumption (min - max) kg/h 0,76 - 1,93
- Standard flue outlet Ø mm 80
- Hopper capacity kg 22
- Dimensions W x D x H mm 516 x 485 x 1048
- Stove weight kg 88
- PMnom (13% O₂) mg/Nm³ 14
- OGCnom (13% O₂) mg/Nm³ 1




TOTAL PRICE	
Total price including stove and painted steel cladding	2.605,00

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07700100C	2.605,00
BORDEAUX	S07700200C	2.605,00
NERO	S07700300C	2.605,00


ACCESSORIES ON REQUEST	CODE	EURO
EASY Remote control	N08013030C	80,00
Right-hand or left-hand side flue kit	N08011035C	95,00
Top flue kit	N08011034C	295,00
Top coaxial flue kit	N08011032C	450,00
Humidifier	N08019053C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre


MELANY version with rear flue outlet, standard

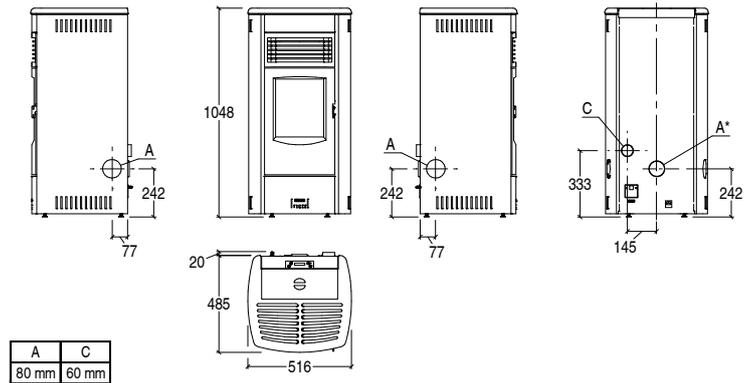

MELANY version with top flue outlet, optional

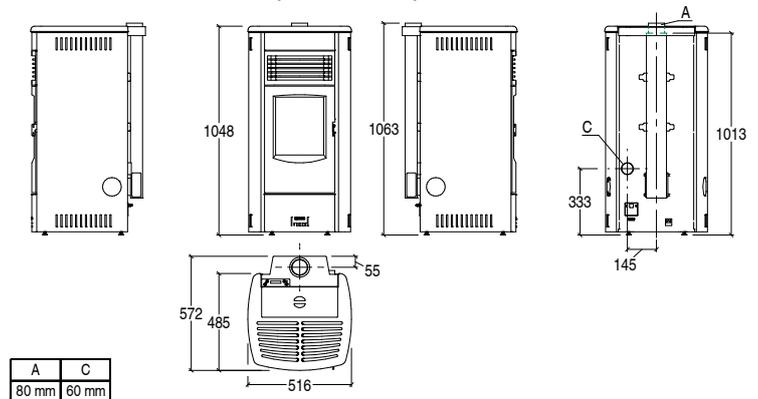

MELANY version with coaxial flue outlet, optional

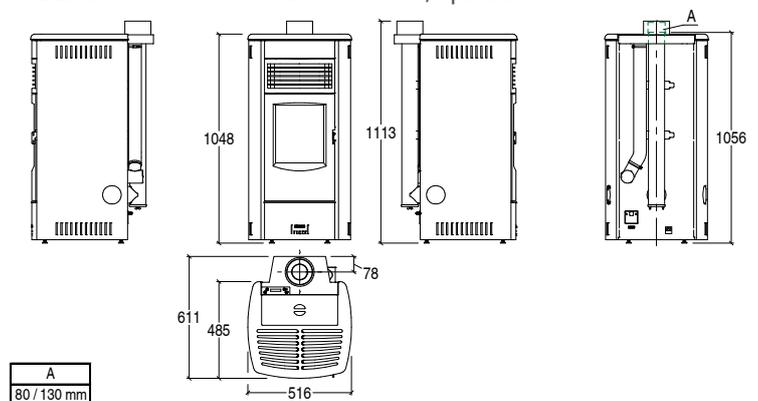

All drawing dimensions in mm.

PELLET STOVES

MICOL FG



-  **FORCED VENTILATION**
-  **HERMETIC**
-  **NATURAL HEATING**
-  **WIFI BLUETOOTH**
-  **DUCTABLE**

GENERAL CHARACTERISTICS

- | | |
|--|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation painted steel painted steel airtight, steel cast iron Skamolex cast iron cast iron steel with screen-printed tempered glass painted steel, detachable resistant up to 750°C yes rear standard 6 daily time frames front upper optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|--|---|

TECHNICAL DATA *

- | | |
|--|--|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output (min - max) • Thermal efficiency (min - max) • Consumption (min - max) • Standard flue outlet Ø • Hopper capacity • Dimensions W x D x H • Stove weight | <ul style="list-style-type: none"> MICOL FG SP450-29A A+ m³ 145 - 245 kW 3,3 - 8,5 % ≥ 91 - ≥ 91 kg/h 0,75 - 1,92 mm 80 kg 15,5 mm 544 x 546 x 1153 kg 160 |
|--|--|



* Product currently being certified


TOTAL PRICE

Total price including stove and painted steel cladding **4.035,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07756100C	4.035,00
GRIGIO	S07756300C	4.035,00
NERO	S07756200C	4.035,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

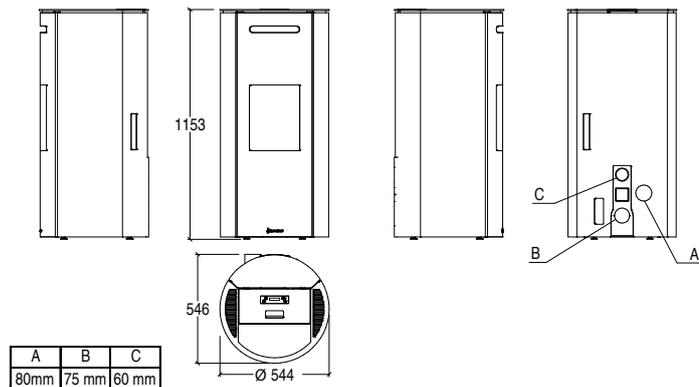

All drawing dimensions in mm.

PELLET STOVES

MICOL FG TOP



- FORCED VENTILATION**
- HERMETIC**
- NATURAL HEATING**
- WIFI BLUETOOTH**
- DUCTABLE**

GENERAL CHARACTERISTICS

- Heating ductable forced ventilation
- Cladding painted steel
- Top painted steel
- Stove airtight, steel
- Firebox cast iron
- Upper baffle plate Skamolox
- Brazier cast iron
- Door cast iron with ceramic glass
- Aesthetic door resistant up to 750°C
- Door handle with screen-printed tempered glass
- Removable ash drawer painted steel detachable handle
- Standard flue outlet position yes
- Ambient probe for temperature control top - top coaxial, integrated
- Programmable timer-thermostat standard
- Warm air outlets 6 daily time frames
- Humidifier front upper optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Hot air ducting kit optional
- Module WiFi- Bluetooth® for App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Combustion air kit standard
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model MICOL FG TOP
- Type SP450-27A
- Energy efficiency class A+
- Room heating capacity m³ 145 - 245
- Nominal heat output (min - max) kW 3,3 - 8,5
- Thermal efficiency (min - max) % 92 - 92
- Consumption (min - max) kg/h 0,75 - 1,92
- Standard flue outlet Ø mm 80
- Hopper capacity kg 15,5
- Dimensions W x D x H mm 544 x 546 x 1153
- Stove weight kg 160
- PMnom (13% O₂) mg/Nm³ 15
- OGCnom (13% O₂) mg/Nm³ 1




TOTAL PRICE

Total price including stove and painted steel cladding **4.305,00**

MODEL/COLOUR	CODE	EURO
Firebox with BIANCO	S07751100C	4.305,00
cladding GRIGIO	S07751300C	4.305,00
NERO	S07751200C	4.305,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

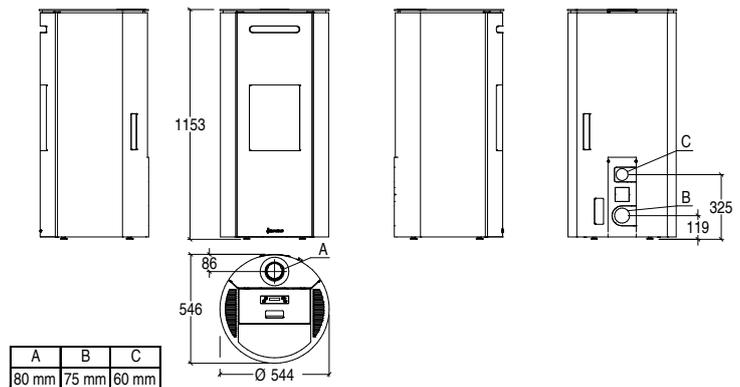

All drawing dimensions in mm.

PELLET STOVES

MICOL TG



- FORCED VENTILATION
- HERMETIC
- NATURAL HEATING
- WIFI BLUETOOTH
- DUCTABLE

GENERAL CHARACTERISTICS

- | | |
|--|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductal forced ventilation glass painted steel airtight, steel cast iron Skamolex cast iron cast iron steel with screen-printed tempered glass painted steel, detachable resistant up to 750°C yes rear standard 6 daily time frames front upper optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|--|---|

TECHNICAL DATA *

- | | |
|--|--|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output (min - max) • Thermal efficiency (min - max) • Consumption (min - max) • Standard flue outlet Ø • Hopper capacity • Dimensions W x D x H • Stove weight | <p>MICOL TG
SP450-29A
A+</p> <p>m³ 145 - 245
kW 3,3 - 8,5
% ≥ 91 - ≥ 91
kg/h 0,75 - 1,92
mm 80
kg 15,5
mm 544 x 546 x 1153
kg 160</p> |
|--|--|




* Product currently being certified

TOTAL PRICE

Total price including stove and painted steel cladding **4.035,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding NERO	S07756500C	4.035,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00 per linear metre

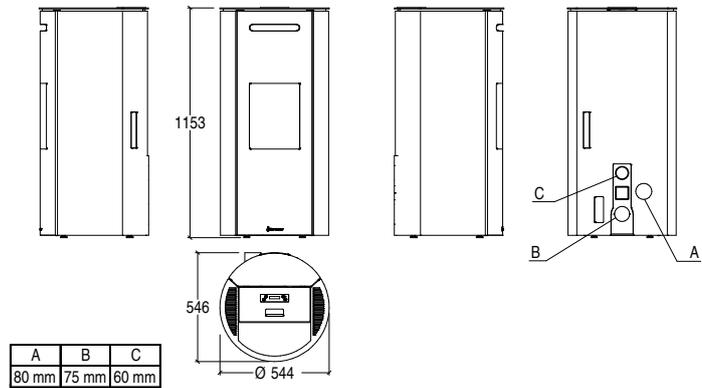

All drawing dimensions in mm.

PELLET STOVES

MICOL TG TOP



- FORCED VENTILATION
- HERMETIC
- NATURAL HEATING
- WIFI BLUETOOTH
- DUCTABLE

GENERAL CHARACTERISTICS

- | | |
|---|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Aesthetic door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> duct forced ventilation glass painting steel airtight, steel cast iron Skamolox cast iron cast iron with ceramic glass resistant up to 750°C with screen-printed tempered glass painting steel detachable handle yes top - top coaxial, integrated standard 6 daily time frames front upper optional yes yes continuous air flow optional standard yes yes yes yes yes yes standard optional 5 wall - corner |
|---|---|

TECHNICAL DATA

- | | |
|-----------------------------------|--------------------------|
| • Model | MICOL TG TOP |
| • Type | SP450-27A |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 145 - 245 |
| • Nominal heat output (min - max) | kW 3,3 - 8,5 |
| • Thermal efficiency (min - max) | % 92 - 92 |
| • Consumption (min - max) | kg/h 0,75 - 1,92 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 15,5 |
| • Dimensions W x D x H | mm 544 x 546 x 1153 |
| • Stove weight | kg 160 |
| • PMnom (13% O ₂) | mg/Nm ³ 15 |
| • OGCnom (13% O ₂) | mg/Nm ³ 1 |




TOTAL PRICE

Total price including stove and painted steel cladding **4.305,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding NERO	S07751500C	4.305,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018001C	260,00
EASY Remote control	N08013034C	80,00
Humidifier	N08019057C	25,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

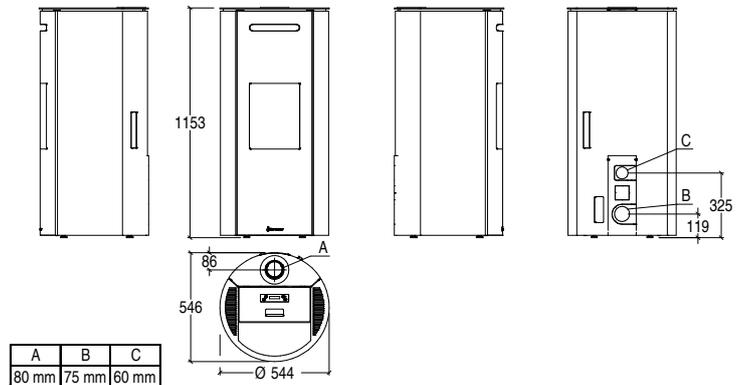

All drawing dimensions in mm.

PELLET STOVES

MILLY



GENERAL CHARACTERISTICS

- Heating ductable forced ventilation
- Cladding painted steel
- Top cast iron with majolica insert
- Stove steel
- Firebox cast iron
- Upper baffle plate cast iron
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Display with digital controls yes
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Hot air ducting kit optional
- Module WiFi- Bluetooth® for App MYSUPERIOR optional
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Optional remote control optional
- Power levels 4
- Installation wall - corner

TECHNICAL DATA

- Model MILLY
- Type SP10/F-05
- Energy efficiency class A+
- Room heating capacity m³ 135 - 230
- Nominal heat output (min - max) kW 3,9 - 8,0
- Thermal efficiency (min - max) % 87,5 - 87,1
- Consumption (min - max) kg/h 0,92 - 1,9
- Standard flue outlet Ø mm 80
- Hopper capacity kg 18
- Dimensions W x D x H mm 495 x 478 x 1068
- Stove weight kg 98
- PM_{nom} (13% O₂) mg/Nm³ 14
- OGC_{nom} (13% O₂) mg/Nm³ 3




TOTAL PRICE

Total price including stove and painted steel cladding **2.785,00**

	MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07360010C	2.785,00
	BORDEAUX	S07360020C	2.785,00
	GRIGIO	S07360030C	2.785,00

ACCESSORIES ON REQUEST	CODE	EURO
Wi-Fi module for control with Superior App	N08013013C	315,00
Hot air ducting kit	S08012600C	275,00
Remote control	S08010900C	65,00
Humidifier	S08010910C	30,00
Combustion air kit	N08010012C	110,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

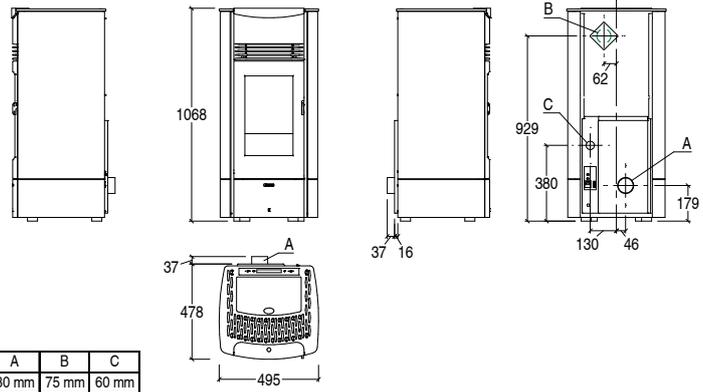

All drawing dimensions in mm.

PELLET STOVES

MOIRA



- FORCED VENTILATION
- HERMETIC
- NATURAL HEATING
- WIFI BLUETOOTH
- DUCTABLE

GENERAL CHARACTERISTICS

- | | |
|---|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Removable ash drawer • Standard flue outlet position • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WIFI- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Pellet Quality System Function • Air Combustion System Function • Combustion air kit • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation painting steel painting steel airtight, steel cast iron Skamolox cast iron cast iron with ceramic glass resistant up to 750°C painting steel detachable handle yes rear standard 6 daily time frames front upper yes yes continuous air flow optional standard yes yes yes yes standard optional 5 wall - corner |
|---|---|

TECHNICAL DATA

- | | |
|---|--|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output (min - max) • Thermal efficiency (min - max) • Consumption (min - max) • Standard flue outlet Ø • Hopper capacity • Dimensions W x D x H • Stove weight • PMnom (13% O₂) • OGCnom (13% O₂) | <ul style="list-style-type: none"> MOIRA SP451-21A A+ m³ 145 - 245 kW 3,5 - 8,5 % 91 - 92 kg/h 0,79 - 1,91 mm 80 kg 16,5 mm 536 x 528 x 1052 kg 112 mg/Nm³ 10 mg/Nm³ 1 |
|---|--|




TOTAL PRICE

Total price including stove and painted steel cladding **2.975,00**

MODEL/COLOUR	CODE	EURO
Firebox with cladding BIANCO	S07740100C	2.975,00
GRIGIO	S07740300C	2.975,00
NERO	S07740200C	2.975,00

ACCESSORIES ON REQUEST	CODE	EURO
Hot air ducting kit	N08018004C	260,00
EASY Remote control	N08013030C	80,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

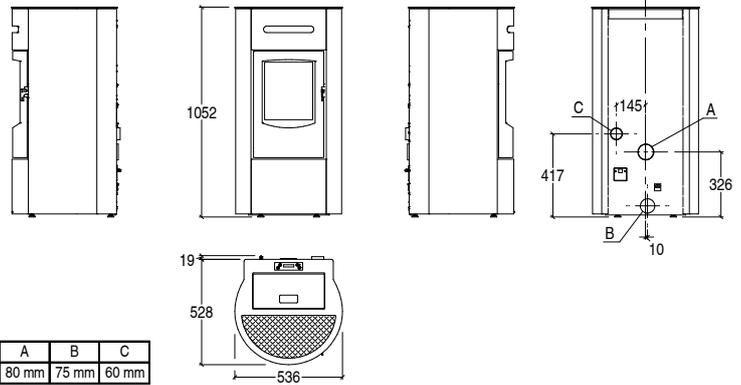

All drawing dimensions in mm.

PELLET STOVES

RITA



GENERAL CHARACTERISTICS

- Heating ductable forced ventilation
- Cladding painted steel
- Top majolica
- Stove steel
- Firebox cast iron
- Upper baffle plate cast iron
- Brazier steel
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position RH rear - RH side - RH top
- Optional flue outlet LH rear - LH side
- Display with digital controls yes
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Hot air ducting kit optional
- Optional ambient thermostat separate control of ventilation
- Module WIFI- Bluetooth® for App MYSUPERIOR optional
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Optional remote control optional
- Power levels 5
- Installation wall
- Flush installation yes

TECHNICAL DATA

- Model RITA
- Type SP351-02
- Energy efficiency class A+
- Room heating capacity m³ 190 - 320
- Nominal heat output (min - max) kW 4,1 - 11,2
- Thermal efficiency (min - max) % 90,0 - 90,3
- Consumption (min - max) kg/h 0,94 - 2,58
- Standard flue outlet Ø mm 80
- Hopper capacity kg 25
- Dimensions W x D x H mm 950 x 311 x 1255
- Stove weight kg 170
- PM₁₀ (13% O₂) mg/Nm³ 19
- OGC_{nom} (13% O₂) mg/Nm³ 2




TOTAL PRICE

Total price including stove and painted steel cladding 4.195,00

	MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07440110C	4.195,00
	BORDEAUX	S07440120C	4.195,00
	GRIGIO	S07440130C	4.195,00

ACCESSORIES ON REQUEST	CODE	EURO
Wi-Fi module for control with Superior App	N08013023C	360,00
Hot air ducting kit	S08012760C	275,00
Remote control	S08010900C	65,00
Rear / left-hand side flue kit	S08011650C	70,00
Humidifier	S08010910C	30,00
Combustion air kit	N08010009C	65,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

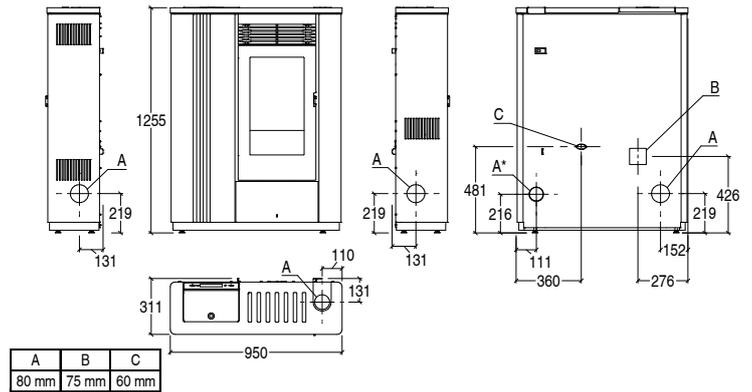

All drawing dimensions in mm.

PELLET STOVES

SABRINA



GENERAL CHARACTERISTICS


- Heating forced ventilation
- Cladding painted steel
- Top cast iron with majolica insert
- Stove steel
- Firebox cast iron
- Upper baffle plate cast iron
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet LH side
- Display with digital controls yes
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR optional
- Energy Saving yes
- Eco Function yes
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model SABRINA
- Type SP40/E-01
- Energy efficiency class A+
- Room heating capacity m³ 170 - 295
- Nominal heat output (min - max) kW 4,7 - 10,2
- Thermal efficiency (min - max) % 88,2 - 88,1
- Consumption (min - max) kg/h 1,12 - 2,39
- Standard flue outlet Ø mm 80
- Hopper capacity kg 30
- Dimensions W x D x H mm 644 x 538 x 1154
- Stove weight kg 130
- PM₁₀ (13% O₂) mg/Nm³ 20
- OGC_{nom} (13% O₂) mg/Nm³ 4



		TOTAL PRICE	
Total price including stove and painted steel cladding		3.215,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07200010C	3.215,00
	BORDEAUX	S07200020C	3.215,00
	GRIGIO	S07200030C	3.215,00
ACCESSORIES ON REQUEST	CODE	EURO	
Wi-Fi module for control with Superior App	N08013013C	315,00	
Remote control	S08010900C	65,00	
Side left-hand flue kit	S08012590C	90,00	
Humidifier	S08010910C	30,00	
Combustion air kit	N08019032C	65,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
		<small>per linear metre</small>	

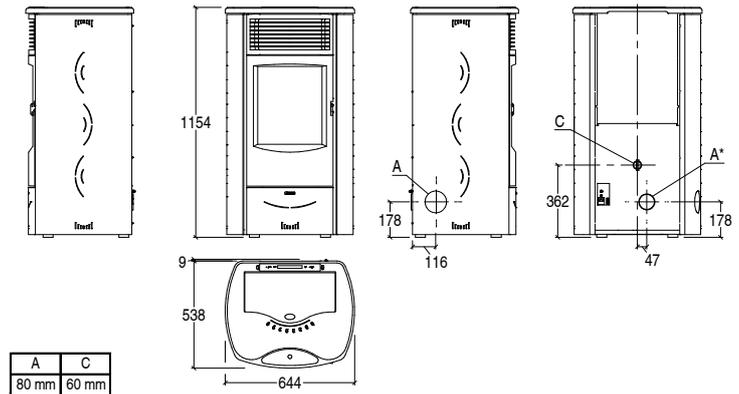

All drawing dimensions in mm.

PELLET STOVES

SALLY



GENERAL CHARACTERISTICS

- Heating forced ventilation
- Cladding painted steel
- Top steel
- Stove steel
- Firebox cast iron
- Upper baffle plate cast iron
- Brazier cast iron
- Door cast iron
- Aesthetic door steel
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet LH side
- Display with digital controls yes
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Module WiFi- Bluetooth® for App MYSUPERIOR optional
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model SALLY
- Type SP40/E-02
- Energy efficiency class A+
- Room heating capacity m³ 170 - 295
- Nominal heat output (min - max) kW 4,7 - 10,2
- Thermal efficiency (min - max) % 88,2 - 88,1
- Consumption (min - max) kg/h 1,12 - 2,39
- Standard flue outlet Ø mm 80
- Hopper capacity kg 30
- Dimensions W x D x H mm 570 x 555 x 1163
- Stove weight kg 130
- PMnom (13% O₂) mg/Nm³ 20
- OGCnom (13% O₂) mg/Nm³ 4




TOTAL PRICE

Total price including stove and painted steel cladding 3.260,00

	MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07500010C	3.260,00
	BORDEAUX	S07500020C	3.260,00
	GRIGIO	S07500030C	3.260,00

ACCESSORIES ON REQUEST	CODE	EURO
Wi-Fi module for control with Superior App	N08013013C	315,00
Remote control	S08012960C	65,00
Side left-hand flue kit	S08012590C	90,00
Humidifier	S08010910C	30,00
Combustion air kit	N08019032C	65,00
Protection kit	S08012980C	95,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

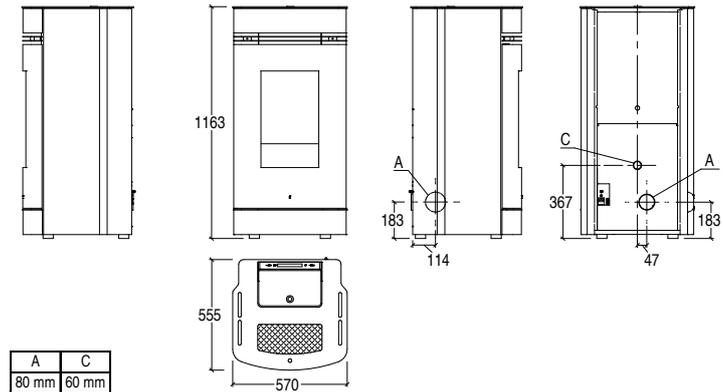

All drawing dimensions in mm.

PELLET STOVES

SOLANGE



GENERAL CHARACTERISTICS


- Heating ductable forced ventilation
- Cladding painted steel
- Top cast iron with majolica insert
- Stove steel
- Firebox cast iron
- Upper baffle plate cast iron
- Brazier cast iron
- Door cast iron
- Door handle painted steel, detachable
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side
- Display with digital controls yes
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier optional
- Pellet level indicator yes
- Brazier cleaning intervals yes
- Glass cleaning system continuous air flow
- Hot air ducting kit optional
- Optional ambient thermostat separate control of ventilation
- Module WIFI- Bluetooth® for App MYSUPERIOR optional
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Optional remote control optional
- Power levels 5
- Installation wall - corner

TECHNICAL DATA

- Model SOLANGE
- Type SP40/E-02
- Energy efficiency class A+
- Room heating capacity m³ 170 - 295
- Nominal heat output (min - max) kW 4,7 - 10,2
- Thermal efficiency (min - max) % 88,2 - 88,1
- Consumption (min - max) kg/h 1,12 - 2,39
- Standard flue outlet Ø mm 80
- Hopper capacity kg 32
- Dimensions W x D x H mm 617 x 589 x 1244
- Stove weight kg 160
- PM₁₀ (13% O₂) mg/Nm³ 20
- OG_{Cnom} (13% O₂) mg/Nm³ 4



		TOTAL PRICE	
Total price including stove and painted steel cladding		3.740,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07430110C	3.740,00
	BORDEAUX	S07430120C	3.740,00
	GRIGIO	S07430130C	3.740,00
ACCESSORIES ON REQUEST	CODE	EURO	
Wi-Fi module for control with Superior App	N08013013C	315,00	
Hot air ducting kit	S08012770C	275,00	
Remote control	S08010900C	65,00	
Right-hand or left-hand side flue kit	S08012590C	90,00	
Humidifier	S08010910C	30,00	
Combustion air kit	N08019032C	65,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
		per linear metre	

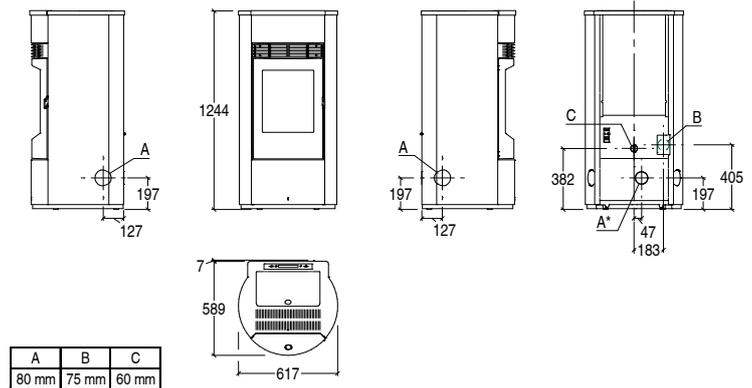

All drawing dimensions in mm.

PELLET STOVES

SONIA



GENERAL CHARACTERISTICS

- | | |
|---|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Optional flue outlet • Display with digital controls • Ambient probe for temperature control • Programmable timer-thermostat • Warm air outlets • Humidifier • Pellet level indicator • Brazier cleaning intervals • Glass cleaning system • Hot air ducting kit • Module WiFi- Bluetooth® for App MYSUPERIOR • Energy Saving • Eco Function • Night mode • Optional remote control • Power levels • Installation | <ul style="list-style-type: none"> ductable forced ventilation painted steel cast iron with majolica insert steel cast iron cast iron cast iron cast iron painted steel, detachable resistant up to 750°C yes rear RH side - LH side yes standard 6 daily time frames front upper optional yes yes continuous air flow optional optional yes yes yes optional 5 wall - corner |
|---|--|

TECHNICAL DATA

- | | |
|-----------------------------------|--------------------------|
| • Model | SONIA |
| • Type | SP40/E-02 |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 170 - 295 |
| • Nominal heat output (min - max) | kW 4,7 - 10,2 |
| • Thermal efficiency (min - max) | % 88,2 - 88,1 |
| • Consumption (min - max) | kg/h 1,12 - 2,39 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 32 |
| • Dimensions W x D x H | mm 608 x 529 x 1228 |
| • Stove weight | kg 140 |
| • PMnom (13% O ₂) | mg/Nm ³ 20 |
| • OGCnom (13% O ₂) | mg/Nm ³ 4 |




TOTAL PRICE

Total price including stove and painted steel cladding **3.420,00**

	MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07370010C	3.420,00
	BORDEAUX	S07370020C	3.420,00
	GRIGIO	S07370030C	3.420,00

ACCESSORIES ON REQUEST	CODE	EURO
Wi-Fi module for control with Superior App	N08013013C	315,00
Hot air ducting kit	S08012600C	275,00
Remote control	S08010900C	65,00
Right-hand or left-hand side flue kit	S08012840C	90,00
Humidifier	S08010910C	30,00
Combustion air kit	N08019032C	65,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00

per linear metre

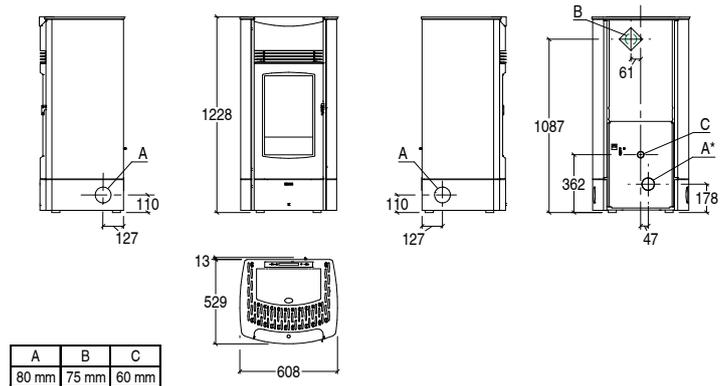

All drawing dimensions in mm.


PELLET STOVES

Accessories

HOT AIR DUCTING

ITEM	COMPATIBLE MODELS	CODE	EURO
 Hot air ducting kit	LIA - MILLY - SONIA	S08012600C	275,00
	RITA	S08012760C	275,00
	SOLANGE	S08012770C	275,00
	CHIARA - MOIRA	N08018004C	260,00
	CORINNA FG - CORINNA FG TOP CORINNA TG - CORINNA TG TOP MICOL FG - MICOL FG TOP MICOL TG - MICOL TG TOP	N08018001C	260,00

HOT AIR DUCTING ACCESSORIES - HOT AIR OUTLETS

ITEM	DIMENSIONS IN CM	UNITS PER PACK	CODE	EURO
 Flexible aluminium pipe ^[1]	Ø 7,5	linear metre	N08011060	20,00 per linear metre
 Y-shaped element	Ø 7,5	10	N08011006	30,00
 90° aluminium bend	Ø 7,5	10	N08011007	30,00
 Pipe clamp	Ø 7,5	50	N08011008	5,00
 Connector sleeve	Ø 7,5	50	N08011009	10,00
 Air vent with closure, enamelled white	L 25 x H 12 Ø 7,5	10	N08011001	60,00
 Wall air vent with closure, enamelled white	L 25 x H 11 Ø 7,5	6	N08011002	85,00
 Wall air vent, blasted steel	L 22 x H 5 Ø 7,5	1	NI08012400-0	161,00
 Wall air vent, black enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014190-0	121,00
 Wall air vent, white enamelled steel	L 22 x H 5 Ø 7,5	1	NI08014400-0	121,00
 Wall air vent, blasted steel	L 43 x H 5 Ø 7,5	1	NI08012410-0	270,00
 Wall air vent, black enamelled steel	L 43 x H 5 Ø 7,5	1	NI08014200-0	225,00
 Wall air vent, white enamelled steel	L 43 x H 5 Ø 7,5	1	NI08014410-0	225,00
 Air vent without closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011003	66,00
 Air vent with closure, made of white-painted steel	L 9,5 x H 9,5 Ø 7,0	1	N08011004	72,00

[1] Available in 30-metre packs, minimum order quantity 1 metre.

REMOTE MANAGEMENT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Wi-Fi module for control through Superior App inclusive of serial cable and power supply ^[1]	LIA - MILLY - SABRINA SALLY - SOLANGE - SONIA	N08013013C	315,00
	RITA	N08013023C	360,00

[1] Compatible with all models produced or updated starting from 2013.

PELLET STOVES

Accessories

COMBUSTION AIR KIT AND ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Combustion air kit	MILLY	N08010012C	110,00
 Combustion air kit	RITA	N08010009C	65,00
 Combustion air kit	SABRINA - SALLY SOLANGE - SONIA	N08019032C	65,00
Combustion air kit	GINGER	N08010035C	100,00
 Flexible pipe Ø 6 cm for combustion air	All models	N08011017	20,00 per linear metre
 Aeration grille with spring for wall hole Ø 6.0-7.5 cm, external Ø 16 cm	All models	N08010014	5,00

OTHER ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 EASY Remote control kit	CAMILLA - CAROL CHIARA - GINGER MARYON - MELANY MOIRA	N08013030C	80,00
	CAROL FG - CLEOPE CLEOPE FG MARY - MARY FG MARYON FG	N08013033C	80,00
	CORINNA FG - CORINNA FG TOP CORINNA TG - CORINNA TG TOP MICOL FG - MICOL FG TOP MICOL TG - MICOL TG TOP	N08013034C	80,00
 Remote control	LIA - MILLY - RITA SABRINA - SOLANGE - SONIA	S08010900C	65,00
	SALLY	S08012960C	65,00
 Top coaxial flue kit	CAMILLA - CAROL - CLEOPE	N08011031C	450,00
	MARY - MARYON - MELANY	N08011032C	450,00
	CAROL FG - CLEOPE FG	N08011039C	450,00
	MARY FG - MARYON FG	N08011040C	450,00
 Top flue kit	CAMILLA - CAROL - CLEOPE	N08011033C	295,00
	CAMILLA - CAROL CAROL FG CLEOPE FG - CLEOPE	N08011043C	295,00
	MARY - MARYON - MELANY	N08011034C	295,00
	MARY - MARY FG MARYON - MARYON FG MELANY	N08011044C	295,00
Top flue kit	GINGER	N08011059C	105,00

PELLET STOVES

Accessories

OTHER ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 Top right-hand flue kit	LIA	N08011046C	95,00
 Top central flue kit	LIA	N08011045C	240,00
 Right-hand or left-hand side flue kit	CAMILLA - CAROL - CAROL FG - CLEOPE CLEOPE FG - MARY - MARY FG MARYON - MARYON FG - MELANY	N08011035C	95,00
 Right-hand side flue kit	LIA	N08011047C	25,00
 Right-hand or left-hand side flue kit	SONIA (R / L)	S08012840C	90,00
	SABRINA (L) - SALLY (L) SOLANGE (R / L)	S08012590C	90,00
 Rear / left-hand side flue kit	RITA	S08011650C	70,00
 Humidifier	CAMILLA - CAROL - CAROL FG CHIARA - CLEOPE - CLEOPE FG GINGER - MARY - MARY FG MARYON - MARYON FG MELANY - MOIRA	N08019053C	25,00
	LIA - MILLY RITA - SABRINA - SALLY SOLANGE - SONIA	S08010910C	30,00
	CORINNA FG - CORINNA FG TOP CORINNA TG - CORINNA TG TOP MICOL FG - MICOL FG TOP MICOL TG - MICOL TG TOP	N08019057C	25,00


PELLET STOVES

Accessories

PROTECTION KIT

	ITEM	COMPATIBLE MODELS	CODE	EURO
	Protection kit	SALLY	S08012980C	95,00
	Protection kit	CLEOPE - MARY	S08012970C	80,00

FLOOR PROTECTION

	ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
	Rectangular steel floor plate	All models	100x120	P08024300C	335,00
	Round edged steel floor plate	All models	100x120	P08024310C	335,00

PIPES - BENDS - CONNECTORS FOR PELLET APPLIANCES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

	ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	Pipe with inspection	L 25	80	P08025890	45,00
	Pipe	L 25	80	P08025370	40,00
		L 50	80	P08025380	66,00
		L 100	80	P08025390	99,00
	Bend 90° with inspection	L 16 x H 16	80	P08025910	99,00
	Bend 90°	L 16 x H 16	80	P08025400	92,00
	Bend 45°	L 12 x H 12	80	P08025410	66,00
	T-fitting w/RH and LH side inspection port	L 14 x H 18	80	P08027250	120,00
	T-fitting w/support ^[1]	L 12 x H 17-22	80	P08027230	150,00
	T-fitting w/support ^[1]	L 12 x H 17-22	80-100	P08027240	150,00
	T-fitting w/inspection port	L 18 x H 14	80	P08025430	105,00
	Flue ring	-	80	P08025490	35,00
	Wall connector	-	80	P08025550	35,00

[1] Not compatible with CAMILLA, CAROL, CLEOPE, MARY, MARYON, MELANY.

PELLET INSERTS

SCP 7	40
SCP 9	41
SCP 11	42
Accessories	43

PELLET INSERTS

SCP 7



GENERAL CHARACTERISTICS


- Fuel pellet
- Heating forced ventilation
- Stove steel, removable with sliding runners
- Firebox cast iron
- Brazier steel
- Door cast iron
- Door handle painted steel, detachable
- Opening cast-iron door
- Standard flue outlet position LH top
- Function control wired in external display with wall mount room temperature sensor
- Power levels 4
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Ceramic glass resistant up to 750°C
- Glass cleaning system continuous air flow
- Brazier cleaning intervals yes
- Pellet level sensor yes
- Energy Saving yes
- Eco Function yes
- Ambient probe for controlling the set temperature standard
- Module for the App Superior management optional
- Ash vacuum cleaner optional
- Combustion air kit optional
- Feet kit optional
- Closing frame kit optional
- Kit containing pellet front-loading tray optional
- Adjustable front pellet loading optional
- Additional hopper with front- rear and R or L side loading optional

TECHNICAL DATA

- Model SCP 7
- Type YP103-01
- Energy efficiency class A+
- Room heating capacity m³ 120 - 200
- Nominal heat output (min - max) kW 3,5 - 7
- Thermal efficiency (min - max) % 88,3 - 87,4
- Consumption (min - max) kg/h 0,83 - 1,66
- Standard flue outlet Ø mm 80
- Hopper capacity kg 8
- Dimensions W x D x H mm 680 x 490 x 490
- Stove weight kg 100
- PM₁₀ (13% O₂) mg/Nm³ 20
- OG_{Cnom} (13% O₂) mg/Nm³ 4



MODEL	CODE	EURO
Insert SCP 7	S04806800C	2.770,00
ACCESSORIES ON REQUEST		EURO
Wi-Fi module for control with Superior App	N08013023C	360,00
Fixed rise kit: W 62 x D 40 x H 38 cm	N08019001C	210,00
Adjustable legs kit H 42-52 cm	N080190051C	105,00
Pellet-loading front tray kit	N08019003C	365,00
Kit containing tank with front loading, total capacity approx. 35 kg	N08019007C	785,00
Kit containing tank with right-hand or left-hand loading to be positioned on the chimney, total capacity approx. 45 kg	N08019009C	635,00
Kit containing tank with adjustable loading, total capacity approx. 18 kg	N08019005C	410,00
Front closure frame kit not compatible with front pellet loading drawer	N08014001C	130,00
Front closure frame kit compatible with front pellet loading drawer	N08014010C	130,00
Edge profile	N08014003C	380,00
Edge profile (Front tray kit for pellet loading, compatible)	N08014004C	380,00
Combustion air kit	N08010017C	150,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00
Ash vacuum cleaner	N08019019C	105,00

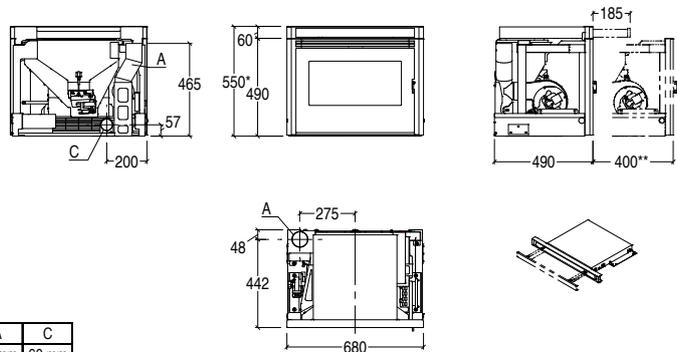

* Height with optional front pellet-loading tray
 ** Extracted insert overall dimensions.

All drawing dimensions in mm.

PELLET INSERTS


SCP 9



GENERAL CHARACTERISTICS

- Fuel pellet
- Heating forced ventilation
- Stove steel, removable with sliding runners
- Firebox cast iron
- Brazier steel
- Door cast iron
- Door handle painted steel, detachable
- Opening cast-iron door
- Standard flue outlet position LH top
- Function control wired in external display with wall mount room temperature sensor front upper
- Warm air outlets 5
- Power levels 6 daily time frames
- Programmable timer-thermostat resistant up to 750°C
- Ceramic glass continuous air flow
- Glass cleaning system yes
- Brazier cleaning intervals yes
- Pellet level sensor yes
- Energy Saving yes
- Eco Function yes
- Ambient probe for controlling the set temperature standard
- Module for the App Superior management optional
- Ash vacuum cleaner optional
- Combustion air kit optional
- Feet kit optional
- Closing frame kit optional
- Kit containing pellet front-loading tray optional
- Adjustable front pellet loading optional
- Additional hopper with front- rear and R or L side loading optional

MODEL	CODE	EURO
Insert SCP 9	S04807800C	3.320,00
ACCESSORIES ON REQUEST		EURO
Wi-Fi module for control with Superior App	N08013023C	360,00
Fixed rise kit: W 72 x D 45 x H 38 cm	N08019002C	210,00
Adjustable legs kit H 42-52 cm	N080190051C	105,00
Pellet-loading front tray kit	N08019004C	415,00
Kit containing tank with front loading, total capacity approx. 42 kg	N08019008C	840,00
Kit containing tank with right-hand or left-hand loading to be positioned on the chimney, total capacity approx. 52 kg	N08019010C	695,00
Kit containing tank with adjustable loading, total capacity approx. 23 kg	N08019006C	470,00
Front closure frame kit not compatible with front pellet loading drawer	N08014002C	130,00
Front closure frame kit compatible with front pellet loading drawer	N08014011C	130,00
Edge profile	N08014005C	380,00
Edge profile (Front tray kit for pellet loading, compatible)	N08014006C	380,00
Combustion air kit	N08010018C	150,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00
Ash vacuum cleaner	N08019019C	105,00

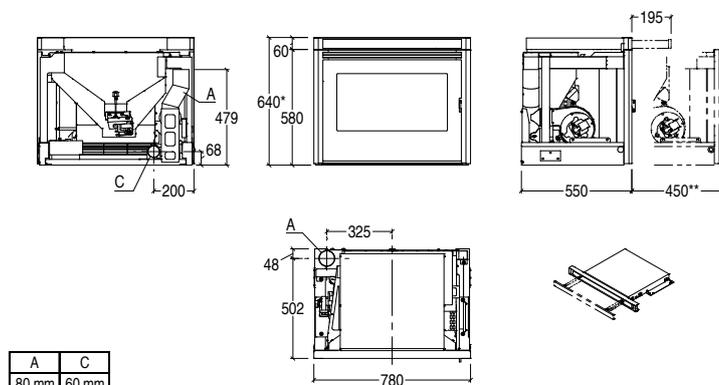

* Height with optional front pellet-loading tray
 ** Extracted insert overall dimensions.

All drawing dimensions in mm.

TECHNICAL DATA

- Model SCP 9
- Type YP113-01
- Energy efficiency class A+
- Room heating capacity m³ 150 - 260
- Nominal heat output (min - max) kW 4,5 - 9
- Thermal efficiency (min - max) % 88,4 - 87,3
- Consumption (min - max) kg/h 1.06 - 2.11
- Standard flue outlet Ø mm 80
- Hopper capacity kg 13
- Dimensions W x D x H mm 780 x 550 x 580
- Stove weight kg 140
- PMnom (13% O₂) mg/Nm³ 18
- OGCnom (13% O₂) mg/Nm³ 5



PELLET INSERTS

SCP 11



GENERAL CHARACTERISTICS


- Fuel pellet
- Heating forced ventilation
- Stove steel, removable with sliding runners
- Firebox cast iron
- Brazier steel
- Door cast iron
- Door handle painted steel, detachable
- Opening cast-iron door
- Standard flue outlet position LH top
- Function control wired in external display with wall mount room temperature sensor
- Power levels 5
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Ceramic glass resistant up to 750°C
- Glass cleaning system continuous air flow
- Brazier cleaning intervals yes
- Pellet level sensor yes
- Energy Saving yes
- Eco Function yes
- Ambient probe for controlling the set temperature standard
- Module for the App Superior management optional
- Ash vacuum cleaner optional
- Combustion air kit optional
- Feet kit optional
- Closing frame kit optional
- Kit containing pellet front-loading tray optional
- Adjustable front pellet loading optional
- Additional hopper with front- rear and R or L side loading optional

TECHNICAL DATA

- Model SCP 11
- Type YP115-01
- Energy efficiency class A+
- Room heating capacity m³ 185 - 315
- Nominal heat output (min - max) kW 4,6 - 11
- Thermal efficiency (min - max) % 87.7 - 87.3
- Consumption (min - max) kg/h 1.09 - 2.6
- Standard flue outlet Ø mm 80
- Hopper capacity kg 22
- Dimensions W x D x H mm 780 x 550 x 680
- Stove weight kg 150
- PM₁₀ (13% O₂) mg/Nm³ 19
- OGC_{nom} (13% O₂) mg/Nm³ 2



MODEL	CODE	EURO
Insert SCP 11	S04808800C	3.470,00
ACCESSORIES ON REQUEST		EURO
Wi-Fi module for control with Superior App	N08013023C	360,00
Fixed rise kit: W 72 x D 45 x H 38 cm	N08019002C	210,00
Adjustable legs kit H 42-52 cm	N080190051C	105,00
Pellet-loading front tray kit	N08019004C	415,00
Kit containing tank with front loading, total capacity approx. 42 kg	N08019016C	895,00
Kit containing tank with right-hand or left-hand loading to be positioned on the chimney, total capacity approx. 52 kg	N08019015C	725,00
Kit containing tank with adjustable loading, total capacity approx. 23 kg	N08019017C	470,00
Front closure frame kit not compatible with front pellet loading drawer	N08014007C	140,00
Front closure frame kit compatible with front pellet loading drawer	N08014012C	140,00
Edge profile	N08014008C	380,00
Edge profile (Front tray kit for pellet loading, compatible)	N08014009C	380,00
Combustion air kit	N08010018C	150,00
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00
Ash vacuum cleaner	N08019019C	105,00

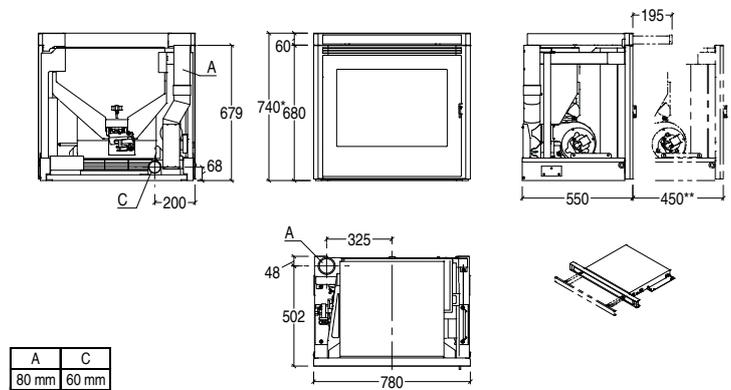

* Height with optional front pellet-loading tray
 ** Extracted insert overall dimensions.

All drawing dimensions in mm.

PELLET INSERTS

Accessories

ACCESSORIES FOR PELLET INSERTS

ITEM	COMPATIBLE MODELS	CODE	EURO
 Fixed rise kit: W 62 x D 40 x H 38 cm	SCP 7	N08019001C	210,00
 Fixed rise kit: W 72 x D 45 x H 38 cm	SCP 9 - SCP 11	N08019002C	210,00
 Adjustable legs kit H 42-52 cm	SCP 7 - SCP 9 - SCP 11	N08019051C	105,00
 Pellet-loading front tray kit	SCP 7	N08019003C	365,00
 Pellet-loading front tray kit	SCP 9 - SCP 11	N08019004C	415,00
 Kit containing tank with front loading, total capacity approx. 35 kg	SCP 7	N08019007C	785,00
 Kit containing tank with front loading, total capacity approx. 42 kg	SCP 9	N08019008C	840,00
 Kit containing tank with front loading, total capacity approx. 42 kg	SCP 11	N08019016C	895,00
 Kit containing tank with right-hand or left-hand loading to be positioned on the chimney, total capacity approx. 45 kg	SCP 7	N08019009C	635,00
 Kit containing tank with right-hand or left-hand loading to be positioned on the chimney, total capacity approx. 52 kg	SCP 9	N08019010C	695,00
 Kit containing tank with right-hand or left-hand loading to be positioned on the chimney, total capacity approx. 52 kg	SCP 11	N08019015C	725,00
 Kit containing tank with adjustable loading, total capacity approx. 18 kg	SCP 7	N08019005C	410,00
 Kit containing tank with adjustable loading, total capacity approx. 23 kg	SCP 9	N08019006C	470,00
 Kit containing tank with adjustable loading, total capacity approx. 23 kg	SCP 11	N08019017C	470,00
 Front closure frame kit not compatible with front pellet loading drawer	SCP 7	N08014001C	130,00
 Front closure frame kit not compatible with front pellet loading drawer	SCP 9	N08014002C	130,00
 Front closure frame kit not compatible with front pellet loading drawer	SCP 11	N08014007C	140,00
 Front closure frame kit compatible with front pellet loading drawer	SCP 7	N08014010C	130,00
 Front closure frame kit compatible with front pellet loading drawer	SCP 9	N08014011C	130,00
Front closure frame kit compatible with front pellet loading drawer	SCP 11	N08014012C	140,00
 Edge profile	SCP 7	N08014003C	380,00
 Edge profile	SCP 9	N08014005C	380,00
 Edge profile	SCP 11	N08014008C	380,00
 Edge profile (Front tray kit for pellet loading, compatible)	SCP 7	N08014004C	380,00
 Edge profile (Front tray kit for pellet loading, compatible)	SCP 9	N08014006C	380,00
 Edge profile (Front tray kit for pellet loading, compatible)	SCP 11	N08014009C	380,00

PELLET INSERTS

Accessories

REMOTE MANAGEMENT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Wi-Fi module for control with Superior App	All models	N08013023C	360,00

COMBUSTION AIR KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
 Combustion air kit	SCP 7	N08010017C	150,00
 Combustion air kit	SCP 9 - SCP 11	N08010018C	150,00
 Flexible pipe Ø 6 cm for combustion air	All models	N08011017	20,00 per linear metre
 Aeration grille with spring for wall hole Ø 6.0-7.5 cm, external Ø 16 cm	All models	N08010014	5,00

PIPES - BENDS - CONNECTORS FOR PELLETS INSERTS

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
 Pipe with inspection	L 25	80	P08025890	45,00
 Pipe	L 25	80	P08025370	40,00
 Pipe	L 50	80	P08025380	66,00
 Pipe	L 100	80	P08025390	99,00
 Bend 90° with inspection	L 16 x H 16	80	P08025910	99,00
 Bend 90°	L 16 x H 16	80	P08025400	92,00
 Bend 45°	L 12 x H 12	80	P08025410	66,00
 Flue ring	-	80	P08025490	35,00
 Wall connector	-	80	P08025550	35,00

PELLET STOVES - THERMO

SABRINA TH 46

Accessories 47

PELLET BOILER STOVES

SABRINA TH



GENERAL CHARACTERISTICS


- | | |
|--|--|
| • Heating | hot water production |
| • Cladding | painted steel |
| • Top | cast iron |
| • Stove | steel |
| • Firebox | steel - Aluker® |
| • Upper baffle plate | steel |
| • Brazier | cast iron |
| • Door | cast iron |
| • Door handle | steel with nickel-plated finish |
| • Ceramic glass | resistant up to 750°C |
| • Removable ash drawer | yes |
| • Standard flue outlet position | LH rear |
| • Optional flue outlet | LH side |
| • Programmable timer-thermostat | 6 daily time frames |
| • Pellet level indicator | yes |
| • Brazier cleaning intervals | yes |
| • Glass cleaning system | continuous air flow |
| • Module WIFI- Bluetooth® for App MYSUPERIOR | optional |
| • Energy Saving | yes |
| • Eco Function | yes |
| • Anti-freeze Function | yes |
| • Combustion air kit | optional |
| • Boiler | steel |
| • Expansion tank | standard |
| • Standard circulator | high efficiency |
| • Safety valve and relief valve | standard |
| • Function control | control panel with digital controls |
| • Power levels | 16 automatic power levels based on set water temperature |
| • Probe for managing storage tank | standard |
| • Probe for managing SHW storage tank | standard |
| • Can be connected to an external thermostat | yes |
| • Aux control | yes |
| • Installation | wall - corner |

TECHNICAL DATA

- | | |
|------------------------------------|--------------------------|
| • Model | SABRINA TH |
| • Type | SP60-02 |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 235 - 400 |
| • Nominal heat output (min - max) | kW 5,1 - 13,9 |
| • Heat output to water (min - max) | kW 4,1 - 12,1 |
| • Thermal efficiency (min - max) | % 89,6 - 92,6 |
| • Consumption (min - max) | kg/h 1,16 - 3,09 |
| • Standard flue outlet Ø | mm 80 |
| • Hopper capacity | kg 35 |
| • Boiler capacity | l 23,5 |
| • Maximum operating pressure | bar 1,5 |
| • 3 bar relief valve | Ø 1/2" |
| • System delivery | Ø 3/4" |
| • System return | Ø 3/4" |
| • Dimensions W x D x H | mm 640 x 540 x 1160 |
| • Stove weight | kg 184 |
| • PMnom (13% O ₂) | mg/Nm ³ 20 |
| • OGCnom (13% O ₂) | mg/Nm ³ 1 |



		TOTAL PRICE	
Total price including stove and painted steel cladding		5.250,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07200210C	5.250,00
	NERO	S07200220C	5.250,00
ACCESSORIES ON REQUEST	CODE	EURO	
Wi-Fi module for control with Superior App	N08013012C	315,00	
Side left-hand flue kit	N08010016C	65,00	
Combustion air kit	N08010011C	35,00	
Kit for connection to the hydraulic system comprising manometer, ball valves and fittings	N08019012C	185,00	
Flexible pipe Ø 6 cm for combustion air	N08011017	20,00	
		per linear metre	

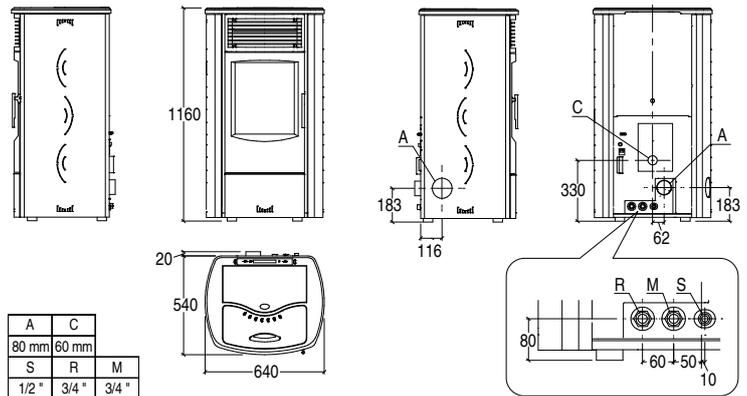

All drawing dimensions in mm.

PELLET BOILER STOVES

Accessories

REMOTE MANAGEMENT

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Wi-Fi module for control through Superior App inclusive of serial cable and power supply [1]</p>	SABRINA TH	N08013012C	315,00

[1] Compatible with all models produced or updated starting from 2013.


COMBUSTION AIR KIT

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Combustion air kit</p>	SABRINA TH	N08010011	35,00
 <p>Flexible pipe Ø 6 cm for combustion air</p>	SABRINA TH	N08011017	20,00 per linear metre
 <p>Aeration grille with spring for wall hole Ø 6.0-7.5 cm, external Ø 16 cm</p>	SABRINA TH	N08010014	5,00

OTHER ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Side left-hand flue kit</p>	SABRINA TH	N08010016C	65,00

FLOOR PROTECTION

ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
 <p>Rectangular steel floor plate</p>	SABRINA TH	100x120	P08024300	335,00
 <p>Round edged steel floor plate</p>	SABRINA TH	100x120	P08024310	335,00

CLEANING AND MAINTENANCE ACCESSORIES

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Cleaning rod</p>	All models	P08061290C	45,00

PELLET BOILER STOVES

Accessories for connecting and managing the water supply system

PLATE SEPARATOR KIT - WITH 1 CIRCULATOR

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Multifunctional hydraulic separator installable on the wall for dividing the flow rates and heads between the circuits. Inclusive of deaerator for separating and evacuating the air in the system, system safety valve and shut-off valves.</p>	All models	P08061000C	790,00
<ul style="list-style-type: none"> Box dimensions L x D x H Maximum operating temperature Circuit maximum operating pressure Secondary circuit circulator Connections Plate heat exchanger power output Nominal voltage Absorbed power Circulator Plate heat exchanger 	<ul style="list-style-type: none"> cm °C bar mwc Ø kW V W yes 	<ul style="list-style-type: none"> 45 x 16 x 50 95 3 6,5 3/4" M 35 230 60 1 	

HYDRAULIC SEPARATOR

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Multifunctional hydraulic separator for dividing the flow rates and heads between the circuits. Inclusive of deaerator for separating and evacuating the air present in the circuit, sludge remover for eliminating impurities in the lower zone of the body and magnetic cartridge for blocking ferromagnetic impurities. Equipped with a manual relief valve and drain tap.</p>	All models	P08061050C	635,00
<ul style="list-style-type: none"> Dimensions W x H Plumbing connections Threaded body Air relief valve body Insulation Maximum operating pressure Fluid temperature range Maximum glycol percentage 	<ul style="list-style-type: none"> cm Ø mm bar °C % 	<ul style="list-style-type: none"> 22,6 x 52,5 1" with F fittings Painted steel Brass 12 10 0-110 30 	

3-WAY SWITCH VALVE

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>Electronically controlled 3-way switch/mixing valve, for combined control of the heating system and of the SHW boiler. Connectable to the electronic board through the multi-pole connector. Removable head for quick and easy maintenance. Manual operation for system emptying and filling, or lack of power supply.</p>	All models	P08061010C	140,00
<ul style="list-style-type: none"> Valve body Return springs / Shutter shaft Opening temperature settable values Maximum nominal pressure Activation Plumbing connections Nominal voltage Nominal frequency Absorbed power 	<ul style="list-style-type: none"> Brass Steel / Stainless steel yes PN10 Electric - manual Ø V Hz W 	<ul style="list-style-type: none"> 3/4" M 220 - 240 50 4 	

ANTI-CONDENSATION VALVE 45 °C

ITEM	COMPATIBLE MODELS	CODE	EURO
 <p>45°C anti-condensation valve for installation on the system return circuit.</p>	All models	P08061020C	125,00
<ul style="list-style-type: none"> Dimensions W x D x H Plumbing connections Valve body Cartridge Sensing bulb opening temperature Complete hysteresis by-pass closing Fluid temperature range Maximum nominal pressure 	<ul style="list-style-type: none"> cm Ø °C °C °C bar 	<ul style="list-style-type: none"> 8,8 x 6,4 x 6,8 1" F Brass Die-cast aluminium 45 10 5-110 10 	

PELLET BOILER STOVES

Accessories

PIPES - BENDS - CONNECTORS FOR PELLET BOILER APPLIANCES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

	ITEM	DIMENSIONS IN CM	Ø MM	COMPATIBLE MODELS	CODE	EURO
	Pipe with inspection	L 25	80	SABRINA TH	P08025890	45,00
	Pipe	L 25	80	SABRINA TH	P08025370	40,00
		L 50	80	SABRINA TH	P08025380	66,00
		L 100	80	SABRINA TH	P08025390	99,00
	Bend 90° with inspection	L 16 x H 16	80	SABRINA TH	P08025910	99,00
	Bend 90°	L 16 x H 16	80	SABRINA TH	P08025400	92,00
	Bend 45°	L 12 x H 12	80	SABRINA TH	P08025410	66,00
	T-fitting w/RH and LH side inspection port	L 14 x H 18	80	SABRINA TH	P08027250	120,00
	T-fitting w/support	L 12 x H 17-22	80	SABRINA TH	P08027230	150,00
	T-fitting w/support	L 12 x H 17-22	80-100	SABRINA TH	P08027240	150,00
	T-fitting w/inspection port	L 18 x H 14	80	SABRINA TH	P08025430	105,00
	Flue ring	-	80	SABRINA TH	P08025490	35,00
	Wall connector	-	80	SABRINA TH	P08025550	35,00

WOOD-BURNING STOVES

MALIKA WITH OVEN	52
MANILA	53
SAMUELA	54
SAVINA WITH OVEN	55
SIBILLA	56
SUSANNA	57
 Accessories	 58

WOOD-BURNING STOVES

MALIKA WITH OVEN



GENERAL CHARACTERISTICS

- | | |
|--|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Glass cleaning system • Primary and secondary air • Installation | <ul style="list-style-type: none"> • natural convection • painted steel • cast iron • steel • cast iron • cast iron • cast iron • cast iron with automatic closure • steel with nickel-plated finish • resistant up to 750°C • yes • top • continuous air flow • adjustable • wall - corner |
|--|--|

TECHNICAL DATA

- | | |
|--|--|
| <ul style="list-style-type: none"> • Model • Type • Energy efficiency class • Room heating capacity • Nominal heat output • Nominal thermal efficiency • Consumption • Standard flue outlet Ø • Size of wood pieces • Firebox opening W x H • Dimensions W x D x H • Stainless steel oven W x D x H • Weight • PMnom (13% O₂) • OGCnom (13% O₂) | <p>MALIKA
SL380-01
A</p> <p>m³ 105 - 180
kW 6,2
% 80,0
kg/h 1,84
mm 120
mm 250 - 300
mm 270 x 250
mm 500 x 430 x 1345
mm 260 x 250 x 315
kg 147
mg/Nm³ 15
mg/Nm³ 46</p> |
|--|--|




TOTAL PRICE

Total price including stove and painted steel cladding **1.955,00**

	MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07021010C	1.955,00
	BORDEAUX	S07021020C	1.955,00
	GRIGIO	S07021030C	1.955,00

ACCESSORIES ON REQUEST	CODE	EURO
Anti-condensation fitting	S08030660C	72,00
Fitting ø 120/140 for inserting pipes Ø 140	S08030730C	35,00
Fitting ø 120/140 for inserting anti-condensation pipes Ø 140	S08030670C	80,00
Rectangular steel floor plate	P08024300C	335,00
Round edged steel floor plate	P08024310C	335,00

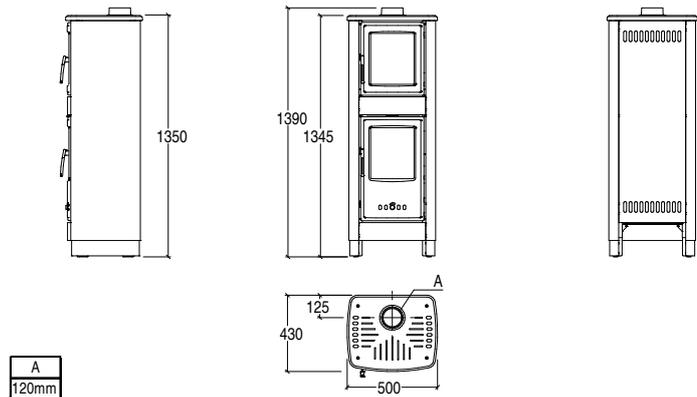

All drawing dimensions in mm.

WOOD-BURNING STOVES

MANILA



GENERAL CHARACTERISTICS


- | | |
|---------------------------------|----------------------------------|
| • Heating | natural convection |
| • Cladding | painted steel |
| • Top | painted steel |
| • Stove | steel |
| • Firebox | cast iron |
| • Upper baffle plate | steel - Skamolex |
| • Brazier | cast iron |
| • Door | cast iron with automatic closure |
| • Door handle | steel with nickel-plated finish |
| • Ceramic glass | resistant up to 750°C |
| • Removable ash drawer | yes |
| • Standard flue outlet position | top |
| • Glass cleaning system | continuous air flow |
| • Primary and secondary air | adjustable |
| • Installation | wall - corner |

TECHNICAL DATA

- | | |
|--------------------------------|--------------------------|
| • Model | MANILA |
| • Type | SL370-02 |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 100 - 175 |
| • Nominal heat output | kW 6,0 |
| • Nominal thermal efficiency | % 84,5 |
| • Consumption | kg/h 1,73 |
| • Standard flue outlet Ø | mm 150 |
| • Size of wood pieces | mm 250 - 300 |
| • Firebox opening W x H | mm 270 x 250 |
| • Dimensions W x D x H | mm 455 x 410 x 1050 |
| • Weight | kg 120 |
| • PMnom (13% O ₂) | mg/Nm ³ 26 |
| • OGCnom (13% O ₂) | mg/Nm ³ 43 |



		TOTAL PRICE	
Total price including stove and painted steel cladding		1.665,00	
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07035010C	1.665,00
	BORDEAUX	S07035020C	1.665,00
	NERO	S07035030C	1.665,00
ACCESSORIES ON REQUEST	CODE	EURO	
	Rectangular steel floor plate	P08024300C	335,00
	Round edged steel floor plate	P08024310C	335,00

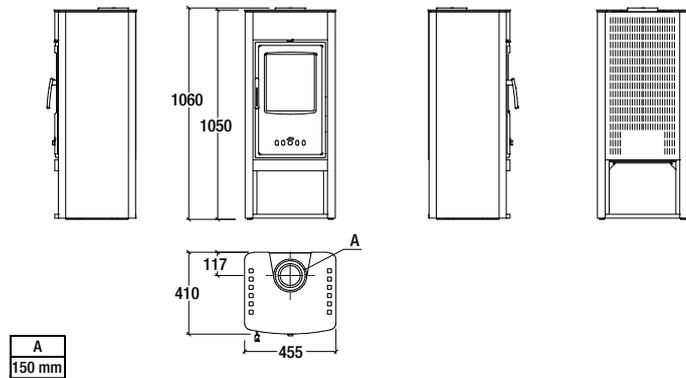

All drawing dimensions in mm.

WOOD-BURNING STOVES

SAMUELA



GENERAL CHARACTERISTICS


- | | |
|--|---|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Glass cleaning system • Primary and secondary air • Installation | <ul style="list-style-type: none"> • natural convection • painted steel • painted steel • steel • cast iron • steel - Skamolex • cast iron • cast iron with automatic closure • steel with nickel-plated finish • resistant up to 750°C • yes • top • continuous air flow • adjustable • wall - corner |
|--|---|

TECHNICAL DATA

- | | |
|--------------------------------|--------------------------|
| • Model | SAMUELA |
| • Type | SL390-01 |
| • Energy efficiency class | A+ |
| • Room heating capacity | m ³ 145 - 245 |
| • Nominal heat output | kW 8,5 |
| • Nominal thermal efficiency | % 83,3 |
| • Consumption | kg/h 2,49 |
| • Standard flue outlet Ø | mm 150 |
| • Size of wood pieces | mm 330 - 380 |
| • Firebox opening W x H | mm 350 x 350 |
| • Dimensions W x D x H | mm 536 x 495 x 1150 |
| • Weight | kg 172 |
| • PMnom (13% O ₂) | mg/Nm ³ 24 |
| • OGCnom (13% O ₂) | mg/Nm ³ 28 |



			TOTAL PRICE
Total price including stove and painted steel cladding			1.980,00
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07034010C	1.980,00
	BORDEAUX	S07034020C	1.980,00
	NERO	S07034030C	1.980,00
ACCESSORIES ON REQUEST	CODE	EURO	
	Rectangular steel floor plate	P08024300C	335,00
	Round edged steel floor plate	P08024310C	335,00

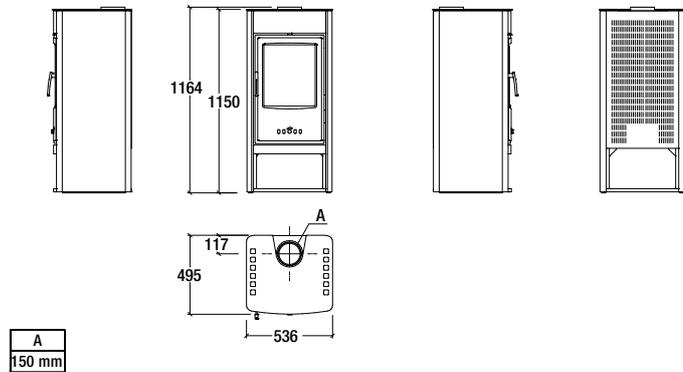

All drawing dimensions in mm.

WOOD-BURNING STOVES

SAVINA WITH OVEN



GENERAL CHARACTERISTICS


- | | |
|--|--|
| <ul style="list-style-type: none"> • Heating • Cladding • Top • Stove • Firebox • Upper baffle plate • Brazier • Door • Door handle • Ceramic glass • Removable ash drawer • Standard flue outlet position • Glass cleaning system • Primary and secondary air • Installation | <ul style="list-style-type: none"> • natural convection • painted steel • cast iron • steel • cast iron • cast iron • cast iron • cast iron with automatic closure • steel with nickel-plated finish • resistant up to 750°C • yes • top • continuous air flow • adjustable • wall - corner |
|--|--|

TECHNICAL DATA

- | | |
|----------------------------------|--------------------------|
| • Model | SAVINA |
| • Type | S55F |
| • Energy efficiency class | A |
| • Room heating capacity | m ³ 135 - 230 |
| • Nominal heat output | kW 8,0 |
| • Nominal thermal efficiency | % 80,3 |
| • Consumption | kg/h 2,46 |
| • Standard flue outlet Ø | mm 150 |
| • Size of wood pieces | mm 330 - 380 |
| • Firebox opening W x H | mm 350 x 350 |
| • Dimensions W x D x H | mm 600 x 510 x 1445 |
| • Stainless steel oven W x D x H | mm 320 x 350 x 315 |
| • Weight | kg 218 |
| • PMnom (13% O ₂) | mg/Nm ³ 25 |
| • OGCnom (13% O ₂) | mg/Nm ³ 48 |



			TOTAL PRICE
Total price including stove and painted steel cladding			2.440,00
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07023010C	2.440,00
	BORDEAUX	S07023020C	2.440,00
	GRIGIO	S07023030C	2.440,00
ACCESSORIES ON REQUEST	CODE	EURO	
Anti-condensation fitting Ø 150	S08030680C	72,00	
Anti-condensation fitting Ø 180	S08030690C	66,00	
Rectangular steel floor plate	P08024300C	335,00	
Round edged steel floor plate	P08024310C	335,00	

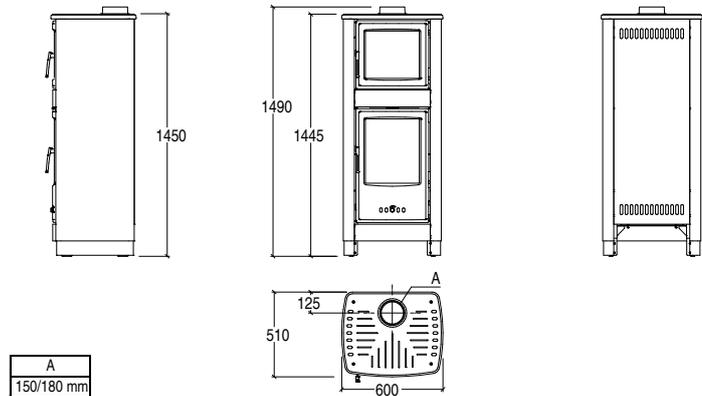

All drawing dimensions in mm.

WOOD-BURNING STOVES

SIBILLA



GENERAL CHARACTERISTICS

- | | |
|---------------------------------|----------------------------------|
| • Heating | natural convection |
| • Cladding | painted steel |
| • Top | cast iron |
| • Stove | steel |
| • Firebox | cast iron |
| • Upper baffle plate | cast iron |
| • Brazier | cast iron |
| • Door | cast iron with automatic closure |
| • Door handle | steel with nickel-plated finish |
| • Ceramic glass | resistant up to 750°C |
| • Removable ash drawer | yes |
| • Standard flue outlet position | top |
| • Glass cleaning system | continuous air flow |
| • Primary and secondary air | adjustable |
| • Installation | wall - corner |

TECHNICAL DATA

- | | |
|--------------------------------|--------------------------|
| • Model | SIBILLA |
| • Type | S55 |
| • Energy efficiency class | A |
| • Room heating capacity | m ³ 135 - 230 |
| • Nominal heat output | kW 8,0 |
| • Nominal thermal efficiency | % 78,2 |
| • Consumption | kg/h 2,53 |
| • Standard flue outlet Ø | mm 150 |
| • Size of wood pieces | mm 330 - 380 |
| • Firebox opening W x H | mm 350 x 350 |
| • Dimensions W x D x H | mm 600 x 510 x 1020 |
| • Weight | kg 167 |
| • PMnom (13% O ₂) | mg/Nm ³ 26 |
| • OGCnom (13% O ₂) | mg/Nm ³ 42 |




TOTAL PRICE

Total price including stove and painted steel cladding **1.775,00**

	MODEL/COLOUR	CODE	EURO
Firebox with cladding	BIANCO	S07022010C	1.775,00
	BORDEAUX	S07022020C	1.775,00
	GRIGIO	S07022030C	1.775,00

	ACCESSORIES ON REQUEST	CODE	EURO
	Anti-condensation fitting	S08030680C	72,00
	Rectangular steel floor plate	P08024300C	335,00
	Round edged steel floor plate	P08024310C	335,00

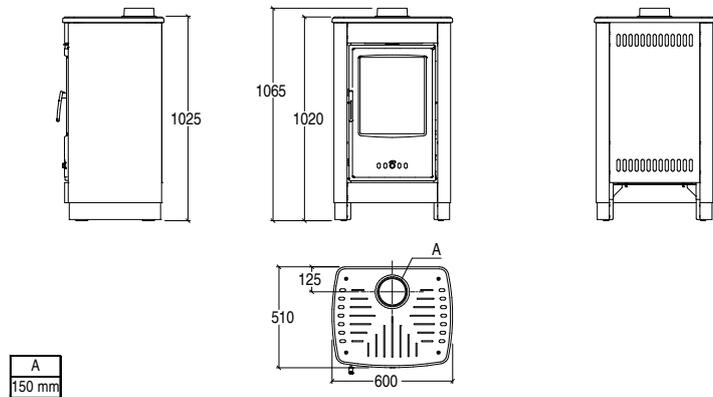

All drawing dimensions in mm.

WOOD-BURNING STOVES

SUSANNA



GENERAL CHARACTERISTICS


- Heating natural convection
- Cladding painted steel
- Top cast iron
- Stove steel
- Firebox cast iron
- Upper baffle plate steel - Skamolex
- Brazier cast iron
- Door cast iron with automatic closure
- Door handle steel with nickel-plated finish
- Ceramic glass resistant up to 750°C
- Removable ash drawer yes
- Standard flue outlet position top
- Glass cleaning system continuous air flow
- Primary and secondary air adjustable
- Installation wall - corner

TECHNICAL DATA

- Model SUSANNA
- Type SL390-01
- Energy efficiency class A+
- Room heating capacity m³ 145 - 245
- Nominal heat output kW 8,5
- Nominal thermal efficiency % 83,3
- Consumption kg/h 2,49
- Standard flue outlet Ø mm 150
- Size of wood pieces mm 330 - 380
- Firebox opening W x H mm 345 x 385
- Dimensions W x D x H mm 600 x 506 x 1016
- Weight kg 188
- PMnom (13% O₂) mg/Nm³ 24
- OGCnom (13% O₂) mg/Nm³ 28



			TOTAL PRICE
Total price including stove and painted steel cladding			1.905,00
MODEL/COLOUR	CODE	EURO	
Firebox with cladding	BIANCO	S07032010C	1.905,00
	BORDEAUX	S07032020C	1.905,00
	NERO	S07032030C	1.905,00
ACCESSORIES ON REQUEST	CODE	EURO	
Anti-condensation fitting	S08030680C	72,00	
Rectangular steel floor plate	P08024300C	335,00	
Round edged steel floor plate	P08024310C	335,00	

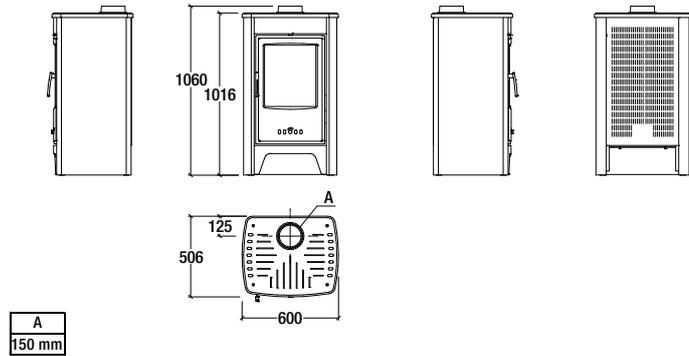

All drawing dimensions in mm.

WOOD-BURNING STOVES

Accessories

PIPES - BENDS - CONNECTORS FOR WOOD-BURNING STOVES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

For wood-burning stoves with oven: MALIKA

	ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	Anti-condensation fitting	-	120	S08030660	72,00
	Fitting ø 120/140 for inserting pipes Ø 140	-	140	S08030730	35,00
	Fitting ø 120/140 for inserting anti-condensation pipes Ø 140	-	140	S08030670	80,00
	Pipe	L 25	140	P08025010	52,00
		L 50	140	P08025040	72,00
		L 100	140	P08025070	112,00
	Pipe with damper ^[1]	L 50	140	P08025120	92,00
		L 100	140	P08025130	132,00
	Bend 90° (2x45°) with inspection	L 32 x H 32	140	P08025190	99,00
	Bend 45° with inspection	L 25 x H 30	140	P08025220	92,00
	Bend 45°	L 17 x H 17	140	P08025250	72,00
	Bend 90° (2x45°) w/damper and inspection ^[1]	L 70 x H 45	140	P08025160	204,00
	Wall connector	-	140	P08025280	16,00
	Damper	-	140	P08025340	52,00
	Flue ring	-	140	P08025310	40,00

[1] Compatible ONLY with anti-condensation.

WOOD-BURNING STOVES

Accessories

PIPES - BENDS - CONNECTORS FOR WOOD-BURNING STOVES

Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

For wood-burning stoves: MANILA, SAMUELA, SIBILLA, SUSANNA

For wood-burning stoves with oven: SAVINA

	ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	Anti-condensation fitting for SAMUELA - SAVINA - SIBILLA - SUSANNA	-	150	S08030680	72,00
	Pipe	L 25	150	P08025020	52,00
		L 50	150	P08025050	72,00
		L 100	150	P08025080	112,00
	Pipe with damper ^[1]	L 50	150	P08025100	92,00
		L 100	150	P08025140	132,00
	Bend 90° (2x45°) with inspection	L 32 x H 32	150	P08025200	99,00
	Bend 45° with inspection	L 25 x H 30	150	P08025230	92,00
	Bend 45°	L 17 x H 17	150	P08025260	72,00
	Bend 90° (2x45°) w/damper and inspection ^[1]	L 70 x H 45	150	P08025170	204,00
	Wall connector	-	150	P08025290	16,00
	Damper	-	150	P08025350	52,00
	Flue ring	-	150	P08025320	40,00

[1] Compatible ONLY with anti-condensation.

WOOD-BURNING STOVES

Accessories

PIPES - BENDS - CONNECTORS FOR WOOD-BURNING STOVES


Aluminium coated steel connecting flue pipes single wall, 2 mm thick, V2 corrosion resistance class, EN 1856-2 compliant

For wood-burning stoves with oven: SAVINA

	ITEM	DIMENSIONS IN CM	Ø MM	CODE	EURO
	Anti-condensation fitting	-	180	S08030690	66,00
	Pipe	L 25	180	P08025030	60,00
		L 50	180	P08025060	80,00
		L 100	180	P08025090	119,00
	Pipe with damper ^[1]	L 50	180	P08025110	92,00
		L 100	180	P08025150	137,00
	Bend 90° (2x45°) with inspection	L 32 x H 32	180	P08025210	112,00
	Bend 45° with inspection	L 25 x H 30	180	P08025240	99,00
	Bend 45°	L 17 x H 17	180	P08025270	80,00
	Bend 90° (2x45°) w/damper and inspection ^[1]	L 70 x H 45	180	P08025180	217,00
	Wall connector	-	180	P08025300	56,00
	Damper	-	180	P08025360	60,00
	Flue ring	-	180	P08025330	45,00

[1] Compatible ONLY with anti-condensation.

FLOOR PROTECTION

	ITEM	COMPATIBLE MODELS	DIMENSIONS IN CM	CODE	EURO
	Rectangular steel floor plate	All models	100x120	P08024300C	335,00
	Round edged steel floor plate	All models	100x120	P08024310C	335,00

Superior informs

Majolica

CHARACTERISTICS: in order to appreciate the characteristic, it is necessary to be informed on this prestigious material.

- 1) **Aesthetic functionality:** the inner steel or cast iron burner is surrounded by majolica shapes and colours.
- 2) **As a source of heating:** majolica, given its natural semi-refractory characteristics, it resists to heat by accumulating it and diffusing it into the ambient air.

It is easy to understand that the larger the majolica piece the more heat it can radiate. Therefore the few and large sizes of the majolica pieces are to be appreciated for the fact that they distribute heat into the room and over time.

The fabrication of large pieces of majolica necessitates a know-how only achieved through a long experience over years in the field. Just stop to think each it takes 12 to 15 days to make a single piece of majolica, with the manual expertise of a dozen or so qualified ceramic masters. Thus due to the long process and manual craftsmanship put into each piece of majolica made by Piazzetta is considered to be unique piece of art work and no two exactly alike.

Important to note that the finishes (the liquid suspension of minerals, finely ground, applied onto the biscuit, which bake to fusion temperature, create a either glossy or dull finish) which chromatically enhance and beautify the "biscuit" (a name given to clay after its first baking process), are all part of controlled chemical reactions which inevitably leave way to phenomena like crazing, speckles and shading... which are not to be considered defects on the majolica but add characteristics of peculiarity to the final piece.

CRAZING: manifests itself on the enameled surface or in crystallization in an intricate form of cracking more or less visible to the naked eye. This is due to the different dilatation coefficient between enamel and the particular semi refractory principals of the biscuit (not to be confused with other materials like porcelain, stoneware, vitreous, fire clay etc...). The crazing distinguishes and characterizes this type of majolica for its specific usage: to cover a piece of material that radiates heat throughout.

PITTING: is present on the surface of the enamel or the crystalline in the form of pinholes. It is caused by gas bubbles, in the enamel itself or in the biscuit, that emerge on the surface through the vitreous mass during softening.

SHADING: typical of red enamels, it shows as clouds of tiny black dots caused by the chemical reaction of iron oxide present variable in the pigment itself. They are formed during the cooling phase after firing.

Despite the complexity of the multiple and variable results given by this particular, hand made and hand painted product, Gruppo Piazzetta ensures the utmost care in the manufacture and quality control of all its majolica production, which true connoisseurs do not hesitate to define as authentic artworks.

SHADE DIFFERENCES: shade differences might vary according to the shape of the majolica plates even within the same production lot. The biscuit, its shape, and the firing temperatures of each single glaze create colour shades that make each majolica plate unique.

CUSTOMIZATION: customizing the majolica is possible with colors different from the ones indicated and bicolor versions, if possible. In these cases a 30% price increase must be applied.

For majolica customizations it is indispensable to check in advance the feasibility.

GENERAL SALES TERMS AND CONDITIONS

1. SCOPE OF APPLICATION

- 1.1. All sales and deliveries of products ("Products") by GRUPPO PIAZZETTA S.p.A. ("Seller") shall be deemed to be made subject to these General Sales Terms and Conditions ("Conditions") and any contract ("Contract") entered into pursuant to Article 2 shall entail their full acceptance by the purchaser ("Purchaser").
- 1.2. Any derogation from the Conditions shall be valid only if expressly approved in writing by Seller. Unless otherwise agreed in writing, these Conditions shall always prevail over Purchaser's general conditions of purchase, regardless of when they are sent to Purchaser and/or when Seller receives the general conditions of purchase. They shall also prevail over any prior agreement between the parties, in whatever form, which shall be deemed conclusively terminated.

2. ORDERS AND ORDER CONFIRMATIONS

- 2.1. Contracts between Seller and Purchaser are concluded in the following manner: the Seller, upon receipt of a request for Products from the Purchaser ("Order"), sends its offer ("Order Confirmation"). The contract ("Contract") is concluded upon receipt of the Order Confirmation by the Customer.
- 2.2. Orders by Purchaser shall become binding on Seller only if accepted by issuance of the appropriate Order Confirmation.
- 2.3. Purchaser's Order may be revoked by Purchaser until Seller issues Order Confirmation.

3. PRICE AND PAYMENTS

- 3.1. Unless otherwise agreed in writing, sales prices do not include transportation costs and are exclusive of taxes and duties.
- 3.2. Seller reserves the right to request a revision of the price if increases in production costs (with regard to raw materials, labour, and other cost items) in excess of 5% occur during the period between the date of Order Confirmation and the date of invoicing.
- 3.3. Payments shall be made to Seller's domicile in the manner and within the terms set forth in the Order Confirmation and may be collected by Seller's agents only if expressly authorized in writing.
- 3.4. Any issuance of bills of exchange or other instruments of credit, if accepted by Seller, shall always be understood to be subject to collection.
- 3.5. Until full payment of the price, the Products shall remain the property of Seller, who may at any time claim their return.
- 3.6. In the event of non-payment, even partial, on the agreed due dates, for the sole effect of non-payment and therefore without the need for formal notification:
 - a) Late payment interest shall accrue in favour of Seller, from the due date for payment and until actual settlement, at the rate set forth in Article 2 point 6) of EU Directive 2011/7 EU dated 16.2.2011 on combating late payment in commercial transactions, or at the rate set forth in any implementing and transposing legislation that may be applicable in the future.
 - b) Seller may immediately discontinue any further supply even if related to other Contracts;
 - c) Purchaser shall be deemed to have forfeited the benefit of the term, with the consequent right for the Seller to immediately demand payment of the entire claim against it for all supplies made and not yet paid for.

4. DELIVERY AND DELIVERY TERMS.

- 4.1. Delivery terms, estimated at 30 working days from the date of Order Confirmation, are approximate in favour of Seller and are never essential.
- 4.2. Unless otherwise agreed in writing, deliveries shall be deemed Ex Works Seller's warehouse ("Ex Works" - Incoterms® 2020).
- 4.3. Purchaser acknowledges that any delay in the delivery of the Products with respect to the date specified in the Order Confirmation shall never give rise to compensable damages or termination of the Contract.
- 4.4. In any case, the delivery is subject to the punctual execution of the payments agreed and already due, even in relation to previous Orders.
- 4.5. Seller reserves the right to accept the request for delivery of partial Orders.

5. RETURNS AND COMPLAINTS

- 5.1. Any product returns must be authorised in writing by Seller; only if the Products are in perfect condition and unused will 70% of the net price paid by Purchaser be refunded.
- 5.2. Immediately following the delivery of the Products, the Purchaser is required to check the correspondence of the delivered Products with those ordered and to verify that they meet the agreed characteristics.
- 5.3. Purchaser is required to make any complaint or report any defects by communication ("Complaint") by e-mail to info@gruppopiazzetta.com , with attached proof of the non-conformities and a copy of the delivery document of the Products, no later than 8 working days, under penalty of forfeiture, from the receipt of the Products (in case of apparent defect) or from the discovery of the defect (in case of hidden defect).
- 5.4. The notification of the defect must be accompanied by the simultaneous making available of the defective Products, with an indication of where they can be viewed; failure to make the Products available or a Complaint made in a manner that does not comply with the above will cause Purchaser to forfeit the Warranty.
- 5.5. In the event of a Complaint, Seller shall only be obliged to replace within a reasonable period of time those components found to be actually defective and/or lacking the contractual quality, or, at Seller's option, to grant a discount or replace the Product if the defect cannot be remedied. The refundability of the costs of transformation, disassembly and disposal of the Products, as well as the refundability of labour costs and indirect damages, loss of profit, and any additional item of damage is expressly excluded.

6. WARRANTY AND LIABILITY

- 6.1. Seller warrants only that the Products conform to the provisions of (i) the Order Confirmation and (ii) the Product Technical Specifications, to the exclusion of any implied warranties as to quality, functionality or additional features, including merchantability outside the Italian territory, where not expressly mentioned ("Warranty").
- 6.2. The Warranty is provided solely on the condition that the Products are installed, used and stored in accordance with Seller's instructions, recommendations and Technical Data Sheets and are regularly maintained by Seller or its Authorized Technicians.
- 6.3. The Warranty does not cover defects or damage related to installation, maintenance or service activities performed

- by Purchaser or any third party.
- 6.4. The Warranty covers only replacement parts for Product defective components or malfunctions; it does not include components subject to normal wear and tear and consumables such as seals, gaskets, glass parts, etc.
 - 6.5. Unless otherwise agreed in writing, the Warranty shall be valid for the duration of 12 months from delivery of the Product to the Purchaser.
 - 6.6. Seller reserves the right to provide end Customer with a specific manufacturer's warranty, conventional and additional to the legal warranty, with the content and for the period that Seller shall consider appropriate.
 - 6.7. Seller shall be liable to Purchaser only within the limits of the Warranty, with the express exclusion of any liability for direct or indirect damage to persons or property resulting from the transport, installation, maintenance or use of the products supplied, or from their failure or defect, except where the exclusion or limitation of liability is not permitted by law.
 - 6.8. In any event, Seller's liability shall be limited to the value of the sale price contained in the Contract.

7. SECRECY AND TRADEMARKS

- 7.1. Purchaser acknowledges that all trademarks and all intellectual property rights relating to the Products, including but not limited to: patents for inventions, designs or models, utility models, trademarks of which Seller is the owner or licensee, know-how, technical specifications and trade secrets, data and information in any way registered or relating to such rights (collectively "IPRs") are the total and exclusive property of Seller and that their communication or use in the context of the sale or service of a Product does not give rise to any right or claim in respect of them on the part of Purchaser, even after the termination of any business relationship between the Parties.
- 7.2. Purchaser agrees not to engage in any activities inconsistent with Seller's ownership of the IPR, including but not limited to unauthorized alterations and modifications of the Products.
- 7.3. Purchaser will refrain from using and registering trademarks similar to and/or confusable with IPR; and will use Seller's IPR only in accordance with Seller's instructions for the purposes set forth in these Conditions.
- 7.4. Seller's trademarks may also be used directly by Purchaser for advertising purposes, but, in any event, only with Seller's prior written permission
- 7.5. Subject to specific written agreement, the Purchaser may use certain of the Seller's IPRs exclusively in accordance with the Regulations for the Use of Trademarks and Domain Names owned by Gruppo Piazzetta S.p.A., in order to promote the Products and their resale, including through the organization of exhibitions and displays. The use of the Products or IPRs of Gruppo Piazzetta S.p.A. for promotional purposes and for display is at the care and expense of the Purchaser, who agrees to hold the Seller harmless from any damage to the Products, property or persons, as well as from any third party claims.

8. PROHIBITION OF REALE TO SANCTIONED PARTIES

- 8.1. Purchaser shall not, directly or indirectly, resell, distribute, transfer or otherwise dispose of the Products or any of their components or spare parts to any entity affected by international sanctions or operating in a country blacklisted by competent international authorities.

- 8.2. Purchaser agrees to exercise reasonable control to ensure that any prospective purchaser or recipient of the Products or components or spare parts is not subject to international sanctions or is not located in a blacklisted country. Purchaser will take all necessary steps to verify the compliance status of prospective purchasers or recipients before engaging in any resale activity and will promptly notify Seller in the event of suspicious orders.

9. WAIVER OF TERMINATION INDEMNITY

- 9.1 In the case of repeat orders over time, Purchaser hereby expressly waives, as of now, any right or claim of a compensatory, indemnification or compensatory nature, for any reason whatsoever, including goodwill, arising out of the termination, for any cause whatsoever, of the relationship of purchase or supply of the Products.

10. APPLICABLE LAW AND EXCLUSIVE JURISDICTION

- 10.1 Italian law shall govern the Conditions and any Contract, agreement or dispute arising out of or in connection with them. The Court of Treviso (Italy) shall be the sole place of jurisdiction for any dispute between the Parties concerning the stipulation of the Conditions, the Contract, its clauses, their interpretation, execution or termination, and any contract, agreement or dispute arising from or related thereto, with the express exclusion of any other potentially competent court.
- 10.2 Seller alone shall also have the right to sue in the court of the place where Purchaser is located or where the Products were or should have been delivered.

11. PROCESSING AND PROTECTION OF PERSONAL DATA

- 11.1 Pursuant to and in accordance with Article 13 of EU Regulation no. 679/ 2016 ("General Data Protection Regulation - GDPR"), Seller and Purchaser declare that they have mutually informed each other about: the identity and contact details of the Data Controller; the legal basis, purposes and methods of processing of their respective data; communication and dissemination of personal data to third parties; the period of data retention; mandatory or optional nature of providing data and consequences of any refusal to answer or disclose them; the rights of the Data Subject and in particular the right to object to the processing of data concerning them and/or to obtain the cancellation, transformation, updating, rectification and integration of the same. By signing the Conditions, the parties mutually express their consent, where necessary pursuant to Article 7 of EU Regulation No. 679/ 2016, to the processing of their data in the aforementioned terms and limits. The Purchaser also acknowledges having fully read the aforementioned information notice.

The present price list annuls and replaces all preceding price lists. All products are packaged on non-returnable pallets. Prices are considered to be without VAT (government sales taxes). Gruppo Piazzetta S.p.A. reserves the right to modify and/or delete all printed material, if deemed necessary by Gruppo Piazzetta without any written or prior notice.



GRUPPO  PIAZZETTA

Via Montello, 22 - 31011 Casella d'Asolo (TV) Italy
tel. +39 0423 5271 - fax +39 0423 55178
www.superiorstufe.it - info@superiorstufe.it
☎ 800-842026



AZIENDA CERTIFICATA ISO 9001:2008